



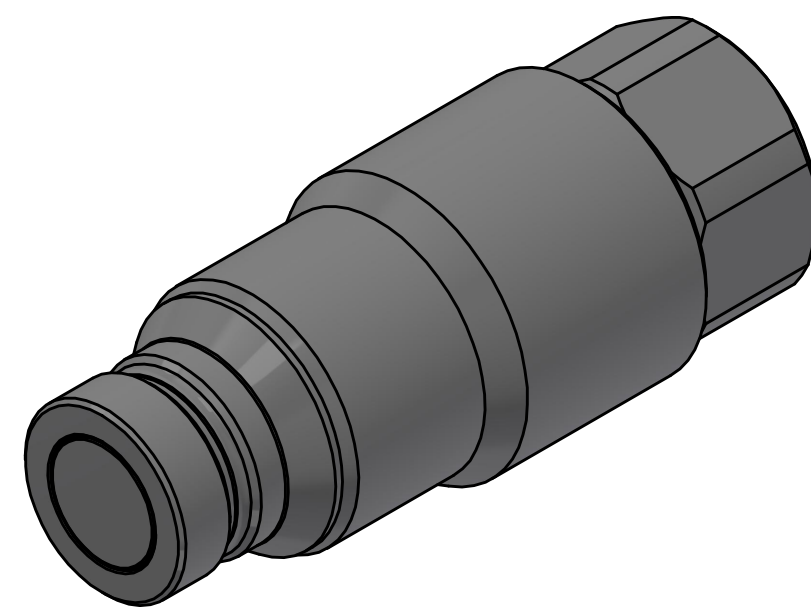

Product No. 100646203	
Nominal flow Ø DN:	25 mm
Connection Stroke:	- mm
Max WP Connected:	350 bar
Max WP Disconnected:	350 bar
Min BP Connected:	1200 bar
Min BP Disconnected:	1200 bar
Temperature range:	-30°C - 100°C
Connection:	1" BSP Fem
Sealing material:	NBR

19	1	O-ring	NBR	097642800
18	1	Seal	PUR	092644660
17	1	Valve seat	Steel	090644001
16	1	O-ring	NBR	096072800
15	1	Spring	Stainless steel	090643256
13	1	Valve pin	Steel	090647053
12	1	Valve stop	Steel	090643951
10	1	Flat seal	Plastic	090644602
9	1	Backup ring	PTFE	090655600
8	1	O-ring	NBR	096162803
7	1	Spring	Stainless steel	090643251
6	1	Valve	Steel	090643056
5	1	Valve pin	Steel	090647052
4	1	Valve stop	Brass	090643952
3	1	Back Part	Steel, Plated	090647323
2	1	Valve	Steel, Plated	090643050
1	1	Nipple Body	Plated	090642321
Item	Qty	Description	Material	Part Number
		Scale 1,5 : 1	Drawn CABPEOD	Checked JoEr
		Appr. PMB		ECO
		Date 2016-10-27		Issue
		Sheet 1 / (1)		

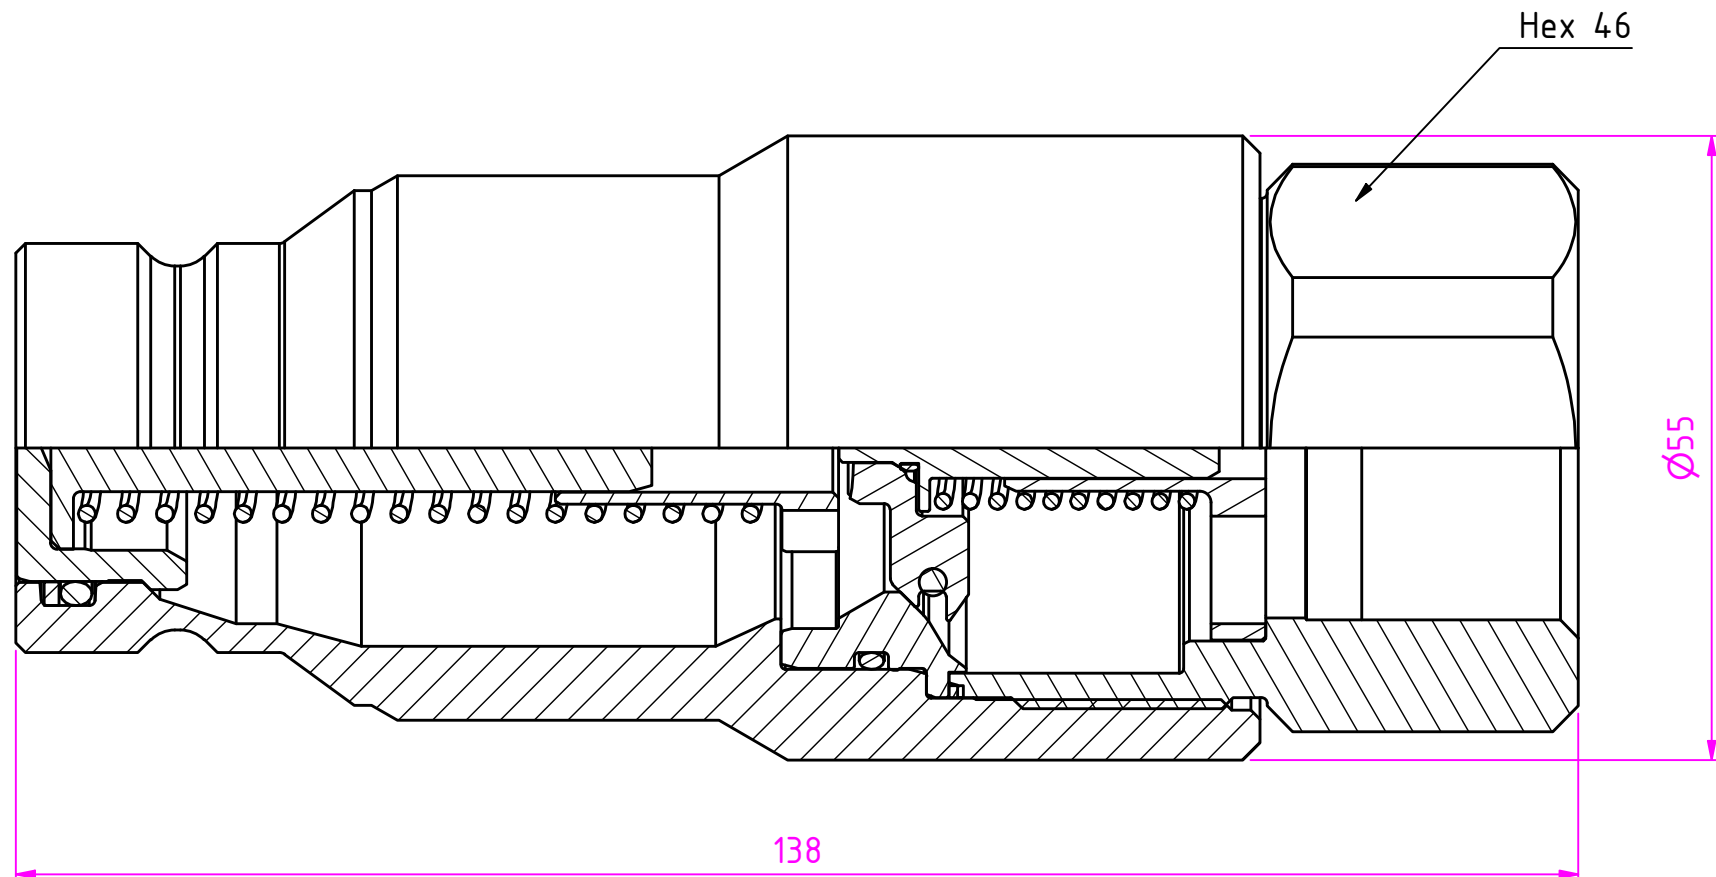

Assembly Drawing 100646203