

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C

B

A

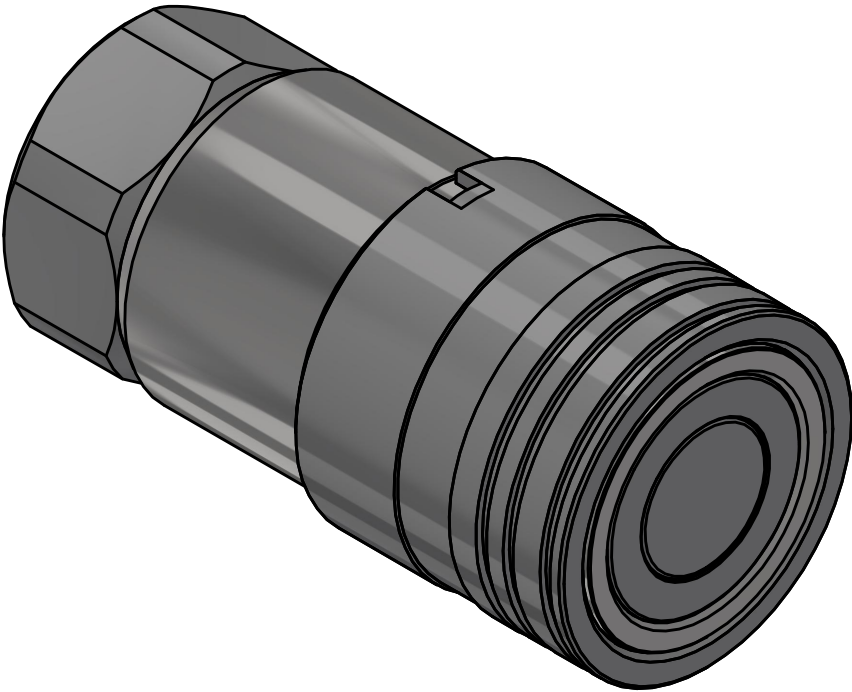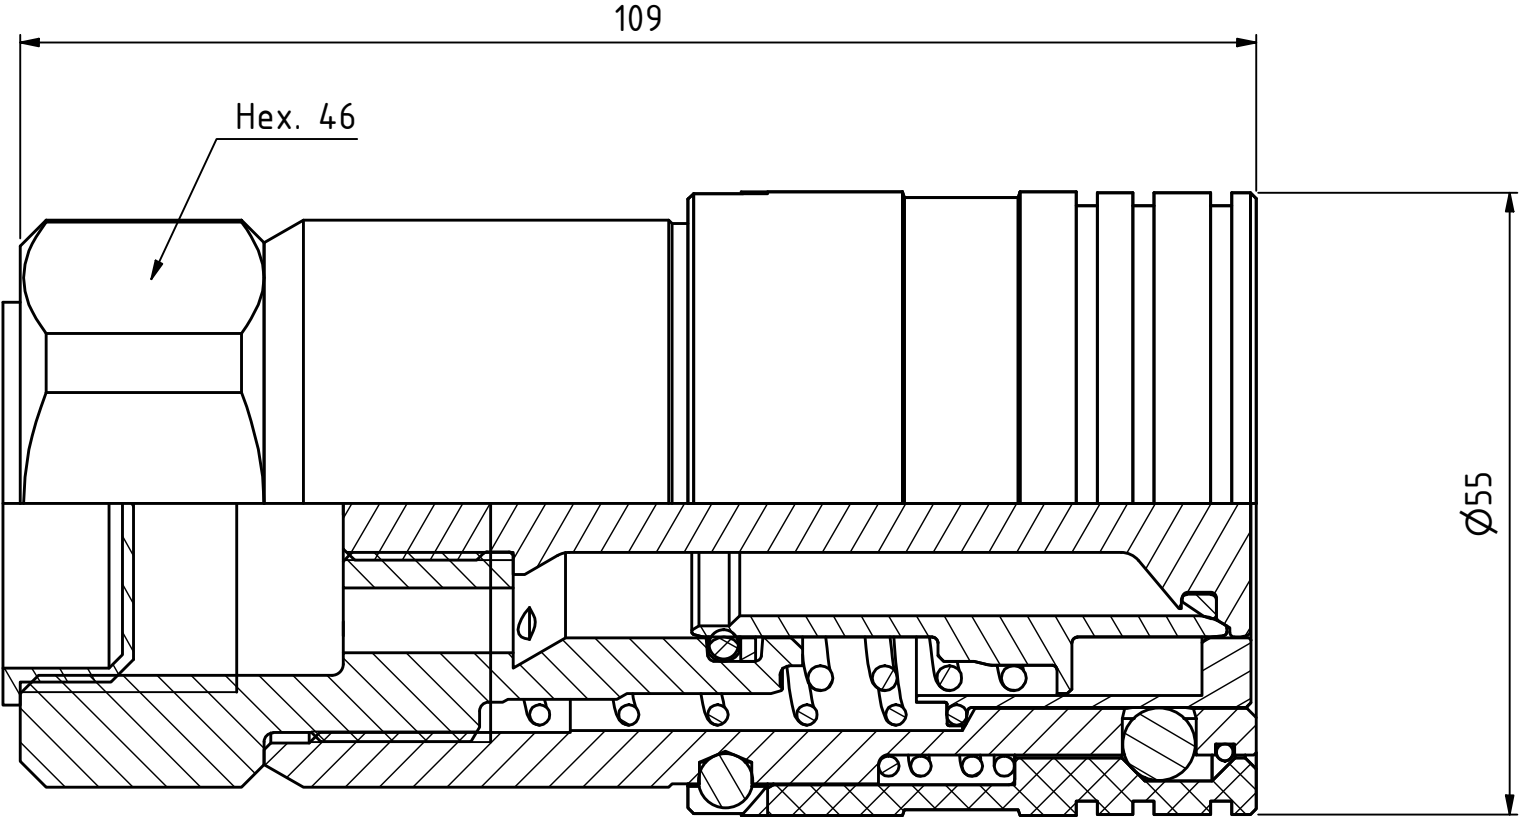

Product No. 100651203	
Nominal flow Ø DN:	25 mm
Connection Stroke:	22,55 mm
Max WP Connected:	350 bar
Max WP Disconnected:	350 bar
Min BP Connected:	1200 bar
Min BP Disconnected:	1200 bar
Temperature range:	-30°C - +100°C
Connection:	1" BSP
Sealing material:	NBR/PUR
Hexagon:	46

11	1	Thread protection	Plastic	099501365
10	1	Spring	Stainless steel	090653200
9	1	Seal	PUR	090652881
8	1	O-ring	NBR	096162803
7	1	Backup ring	PTFE	090655600
6	1	Valve sleeve	Steel, Plated	090655701
5	1	Valve opener	Steel, Plated	090657021
4	1	Back part	Steel, Plated	090654323
3	1	Semi Assembly Fr. Part		090659004
2	1	Spring	Stainless steel	090653201
1	1	Ratchet Sleeve	Steel, Plated	090653520
Item	Qty	Description	Material	Part Number
		Scale 3:2	Drawn CABBW	Checked
		Appr.	ECO	Date 210427
Assembly Drawing 100651203				Drawing No.
				Issue D
				Sheet 1 /(1)