
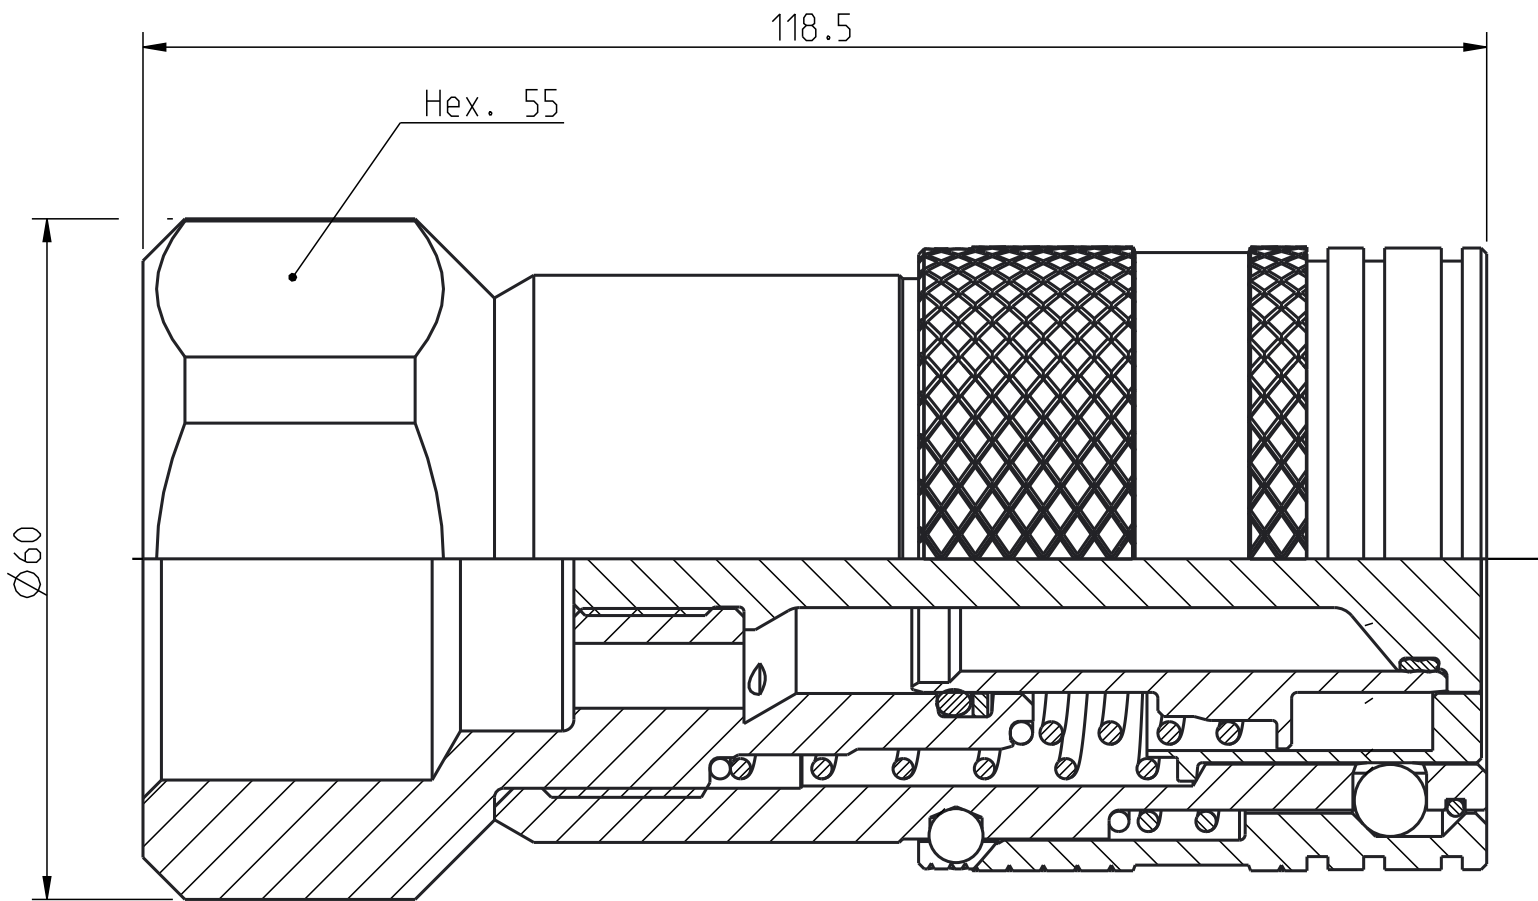


Dessa r  tigheter f  rbeh  lls. Alla r  tigheter f  rbeh  lls. All rights reserved. All rights reserved. Alle rechte vorbehalten. Alle rechte vorbehalten.

Denna handling f  r ej utan v  rt medgivande delges annan. Kopieras eller eljest obeh  rigen anv  ndas.   verr  ttelse h  rvid beivras med st  d av g  llande lag. This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences.



1:1

15	1	Wire coil	Steel
14	1	Valve sleeve	Steel, Plated
13	1	Valve opener	Steel, Zn 5 silver
12	1	Spring	Stainless steel
11	1	Spring	Stainless steel
10	1	Spring	Stainless steel
9	1	Ratchet sleeve	Steel, Zn-Ni 9 transp
8	1	O-ring	NBR
7	1	Locking sleeve	Steel, Zn-Ni 10 black
6	1	Front part	Steel, Zn-Ni 9 transp
5	1	Dualseal	PUR
4	15	Ball	Stainless steel
3	1	Ball	Stainless steel
2	1	Backup ring	Plastic
1	1	Back part	Steel, Zn-Ni 9 transp
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

Product no: 10_065_1204		
Max working pressure:	350 bar connected	350 bar disconnected
Min burst pressure:	1200 bar connected	1200 bar disconnected
Sealing material:	NBR/PUR	
Temperatur range:	-30�C - +100 �C	
Nominal flow diameter,DN:	25 mm	
Connection	1 1/4" BSP	
Connection stroke:	22.55 mm	



Skala Scale	8:5	Ritad Drawn	MBa	Kontr. Checked	JoEr	Godk. Appr.	PMB	Am nr. Alt. no.	-	Dat. Date	120511
Assembly drawing						Ritning nr/Drawing No.				Utg./Issue	
						50_065_1204				AA	