
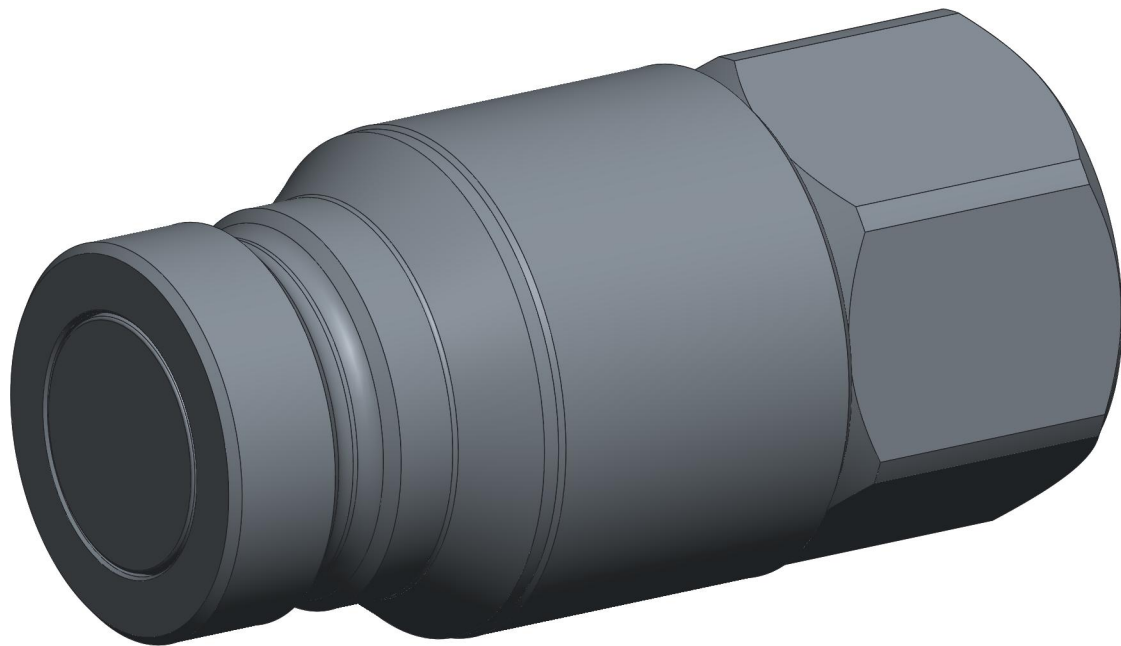


Dessa r  tigheter f  rbeh  lls.
All rights reserved.
Alle rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdr  ckliche Genehmigung kopiert oder auf andere Weise verv  ltlicht werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Denna handling f  r ej utan v  t medgivande delges aman. kopieras eller eljest obeh  rigen anv  ndas.
  vertr  delse h  rvid beivras med st  d av g  llande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

Product no: 10_065_6203		
Max working pressure:	350	bar connected
	350	bar disconnected
Min burst pressure:	1200	bar connected
	1200	bar disconnected
Sealing material:	NBR	
Temperatur range:	-30��C - +100 ��C	
Nominal flow diameter,DN:	25	mm
Connection	1" BSP	
Connection stroke:	-	mm

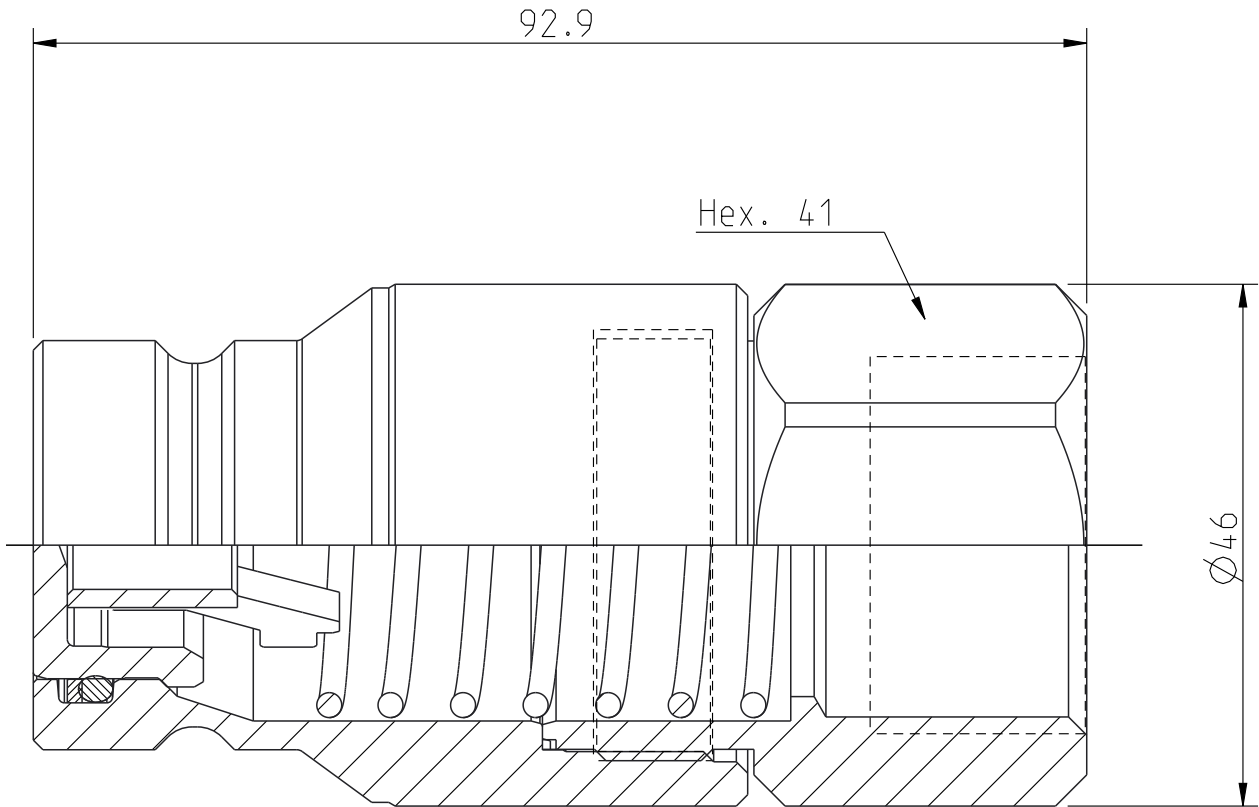

8	1	Valve stop	Brass
7	1	Valve	Steel, Plated
6	1	Spring	Stainless steel
5	1	O-ring	NBR
4	1	Nipple body	Steel, Zn-Ni 9 transp
3	1	Flat seal	Plastic
2	1	Backup ring	PTFE
1	1	Back part	Steel, Zn-Ni 9 transp
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	8:5	Rit��d Drawn	CABJOER	Kontr. Checked	-	Godk. Appr.	-	��m nr. Alt. no.	-	Dat. Date	12-09-05
	Assembly drawing		Ritning nr/Drawing No.				50_065_6203		Utg./Issue			AB