

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

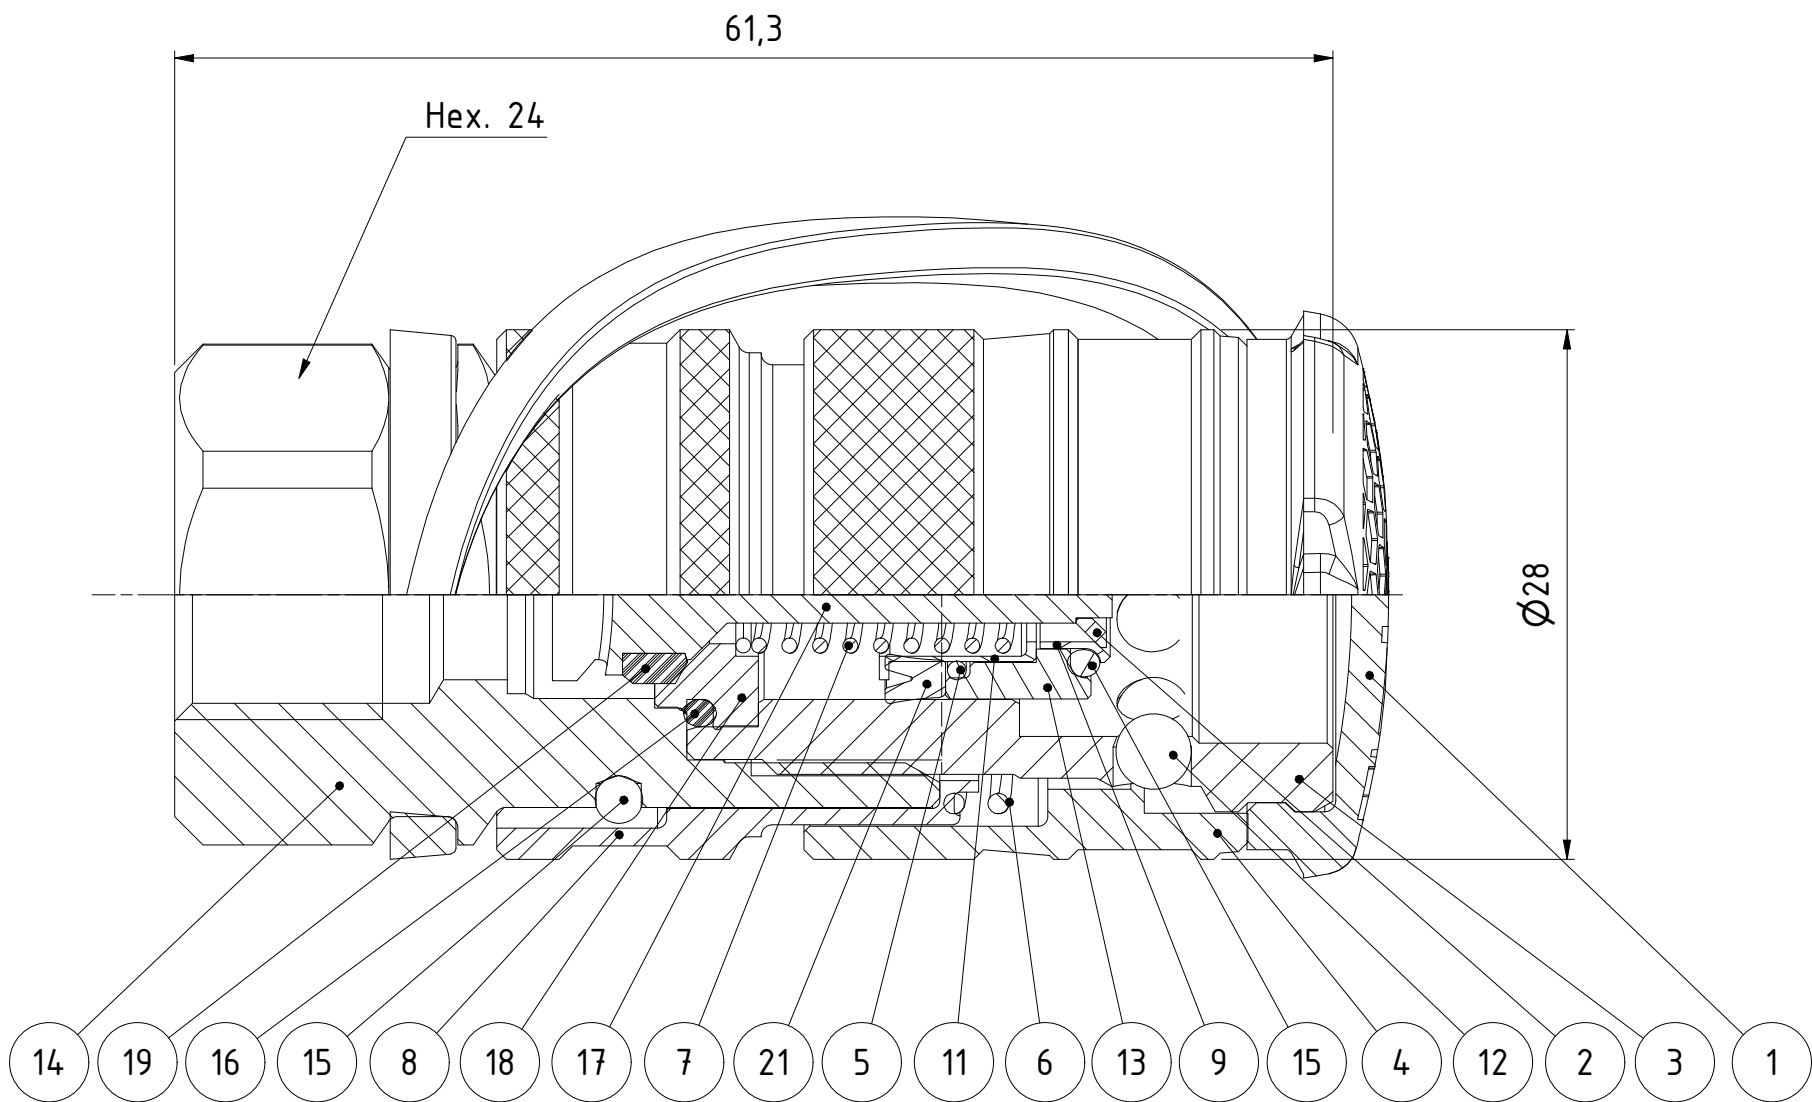


Quick action safety lock

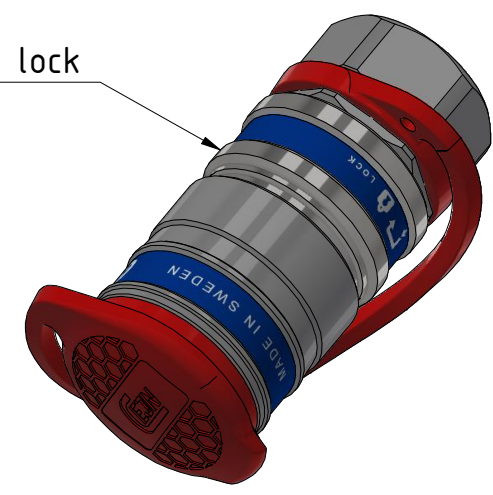

21	1	Lip seal	NBR 80°±3° Shore (mtrl code N80/127)
20	2	Ball	Stainless steel
19	1	Seal	NBR
18	1	Valve seat	Steel
17	1	Valve	Steel, FeZn5
16	1	O-ring	NBR
15	1	O-ring	NBR
14	1	Back part	Steel, Zn 8 silver
13	1	Expansion sleeve	Plastic
12	9	Ball	Stainless steel
11	1	Spring housing	Steel
9	1	O-ring sleeve	Steel
8	1	Sleeve	Steel, Zn 8 silver
7	1	Spring	Steel
6	1	Spring	Stainless steel
5	1	O-ring	NBR
4	1	Locking sleeve	Hard. steel, Zn 8 Silver
3	1	Front part	Steel, Zn 8 silver
2	1	Washer	Steel
1	1	Dust Cap	TPE, red
Item	Qty	Description	Material

Product No.	101151202
Nominal flow Ø DN:	2.5 mm
Connection Stroke:	18.3 mm
Max WP Connected:	1000 bar
Max WP Disconnected:	1000 bar
Min BP Connected:	2600 bar
Min BP Disconnected:	2600 bar
Temperature range:	-30°C - +100°C
Connection:	G1/4" female
Sealing material:	NBR
Hexagon:	24

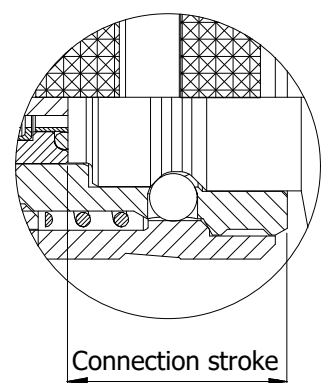

Scale: 2,5 : 1

Drawn: CABAO

Checked: FR

Appr.: JE

ECO: 12061

Date: 2018-04-23

Assembly Drawing 101151202

Drawing No.

Issue: C

Sheet: 1 / (1)