

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

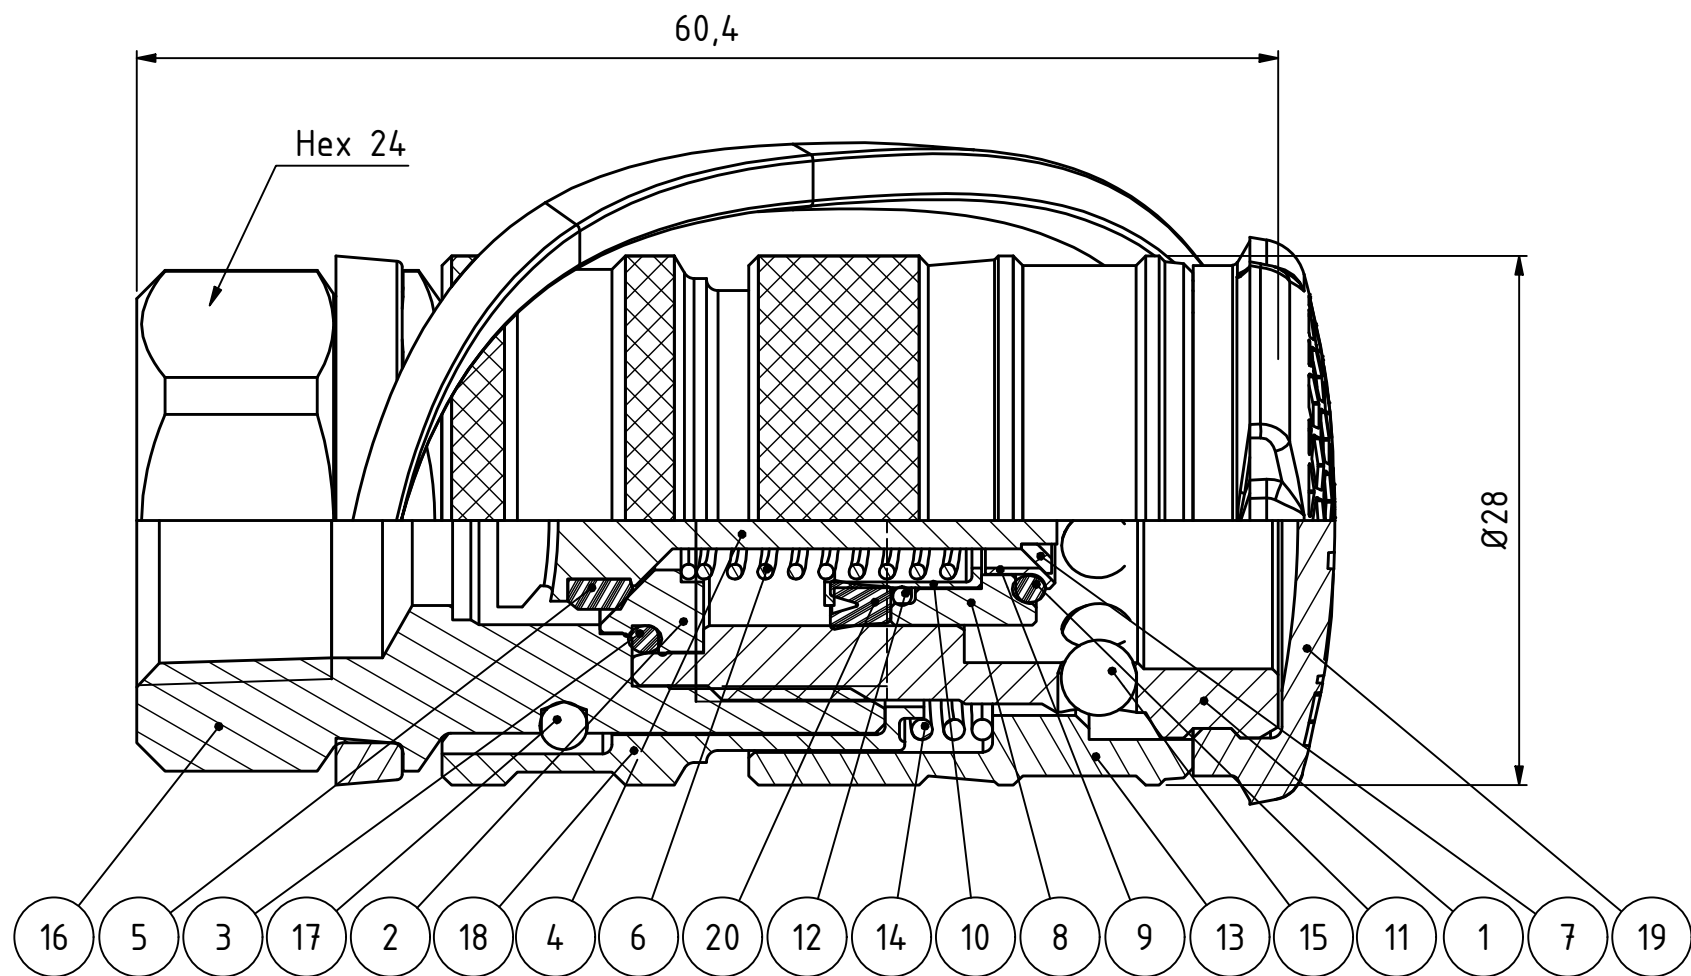

Quick action safety lock

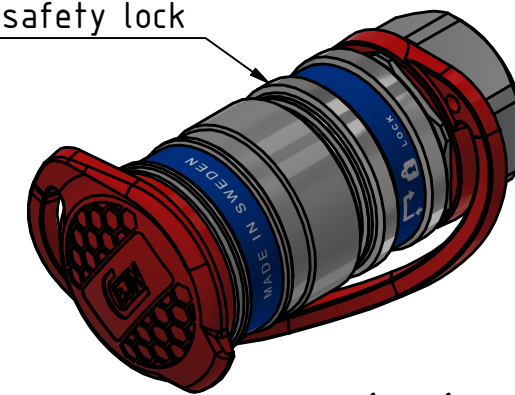


1 : 1

20	1	Lip seal	NBR 80°±3° Shore (mtrl code N80/127)
19	1	Dust Cap	TPE, red
18	1	Sleeve	Steel, Zn 8 silver
17	2	Ball	Stainless steel
16	1	Back part	Steel, Zn 8 silver
15	9	Ball	Stainless steel
14	1	Spring	Stainless steel
13	1	Locking sleeve	Hard. steel, Zn 8 Silver
12	1	O-ring	NBR
11	1	O-ring	NBR
10	1	Spring housing	Steel
9	1	O-ring sleeve	Steel
8	1	Expansion sleeve	Plastic
7	1	Washer	Steel
6	1	Spring	Steel
5	1	Seal	NBR
4	1	Valve	Steel, FeZn5
3	1	O-ring	NBR
2	1	Valve seat	Steel
1	1	Front part	Steel, Zn 8 silver
Item	Qty	Description	Material

Product No. 101151404

Nominal flow Ø DN: 2,5 mm
Connection Stroke: 18,3 mm
Max WP Connected: 1000 bar
Max WP Disconnected: 1000 bar
Min BP Connected: 2600 bar
Min BP Disconnected: 2600 bar
Temperature range: -30°C - +100°C
Connection: 3/8" NPT female
Sealing material: NBR
Hexagon: 24

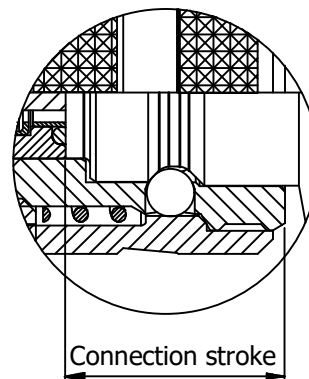

Scale: 5:2

Drawn: CABAO

Checked: FR

Appr.: JE

ECO: 12061

Date: 2018-04-15

Assembly Drawing 101151404

Drawing No.

Issue: B

Sheet: 1 / (1)