
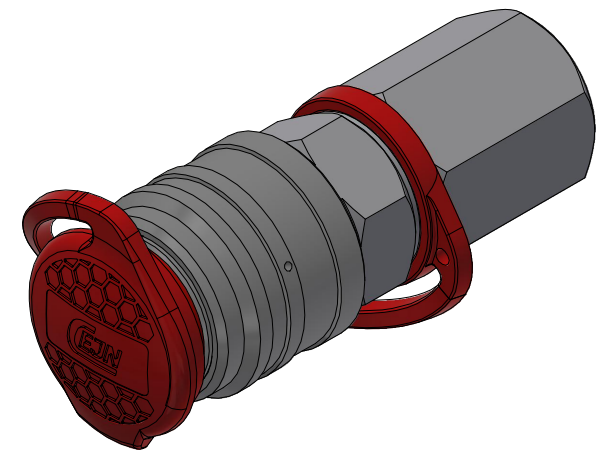



This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

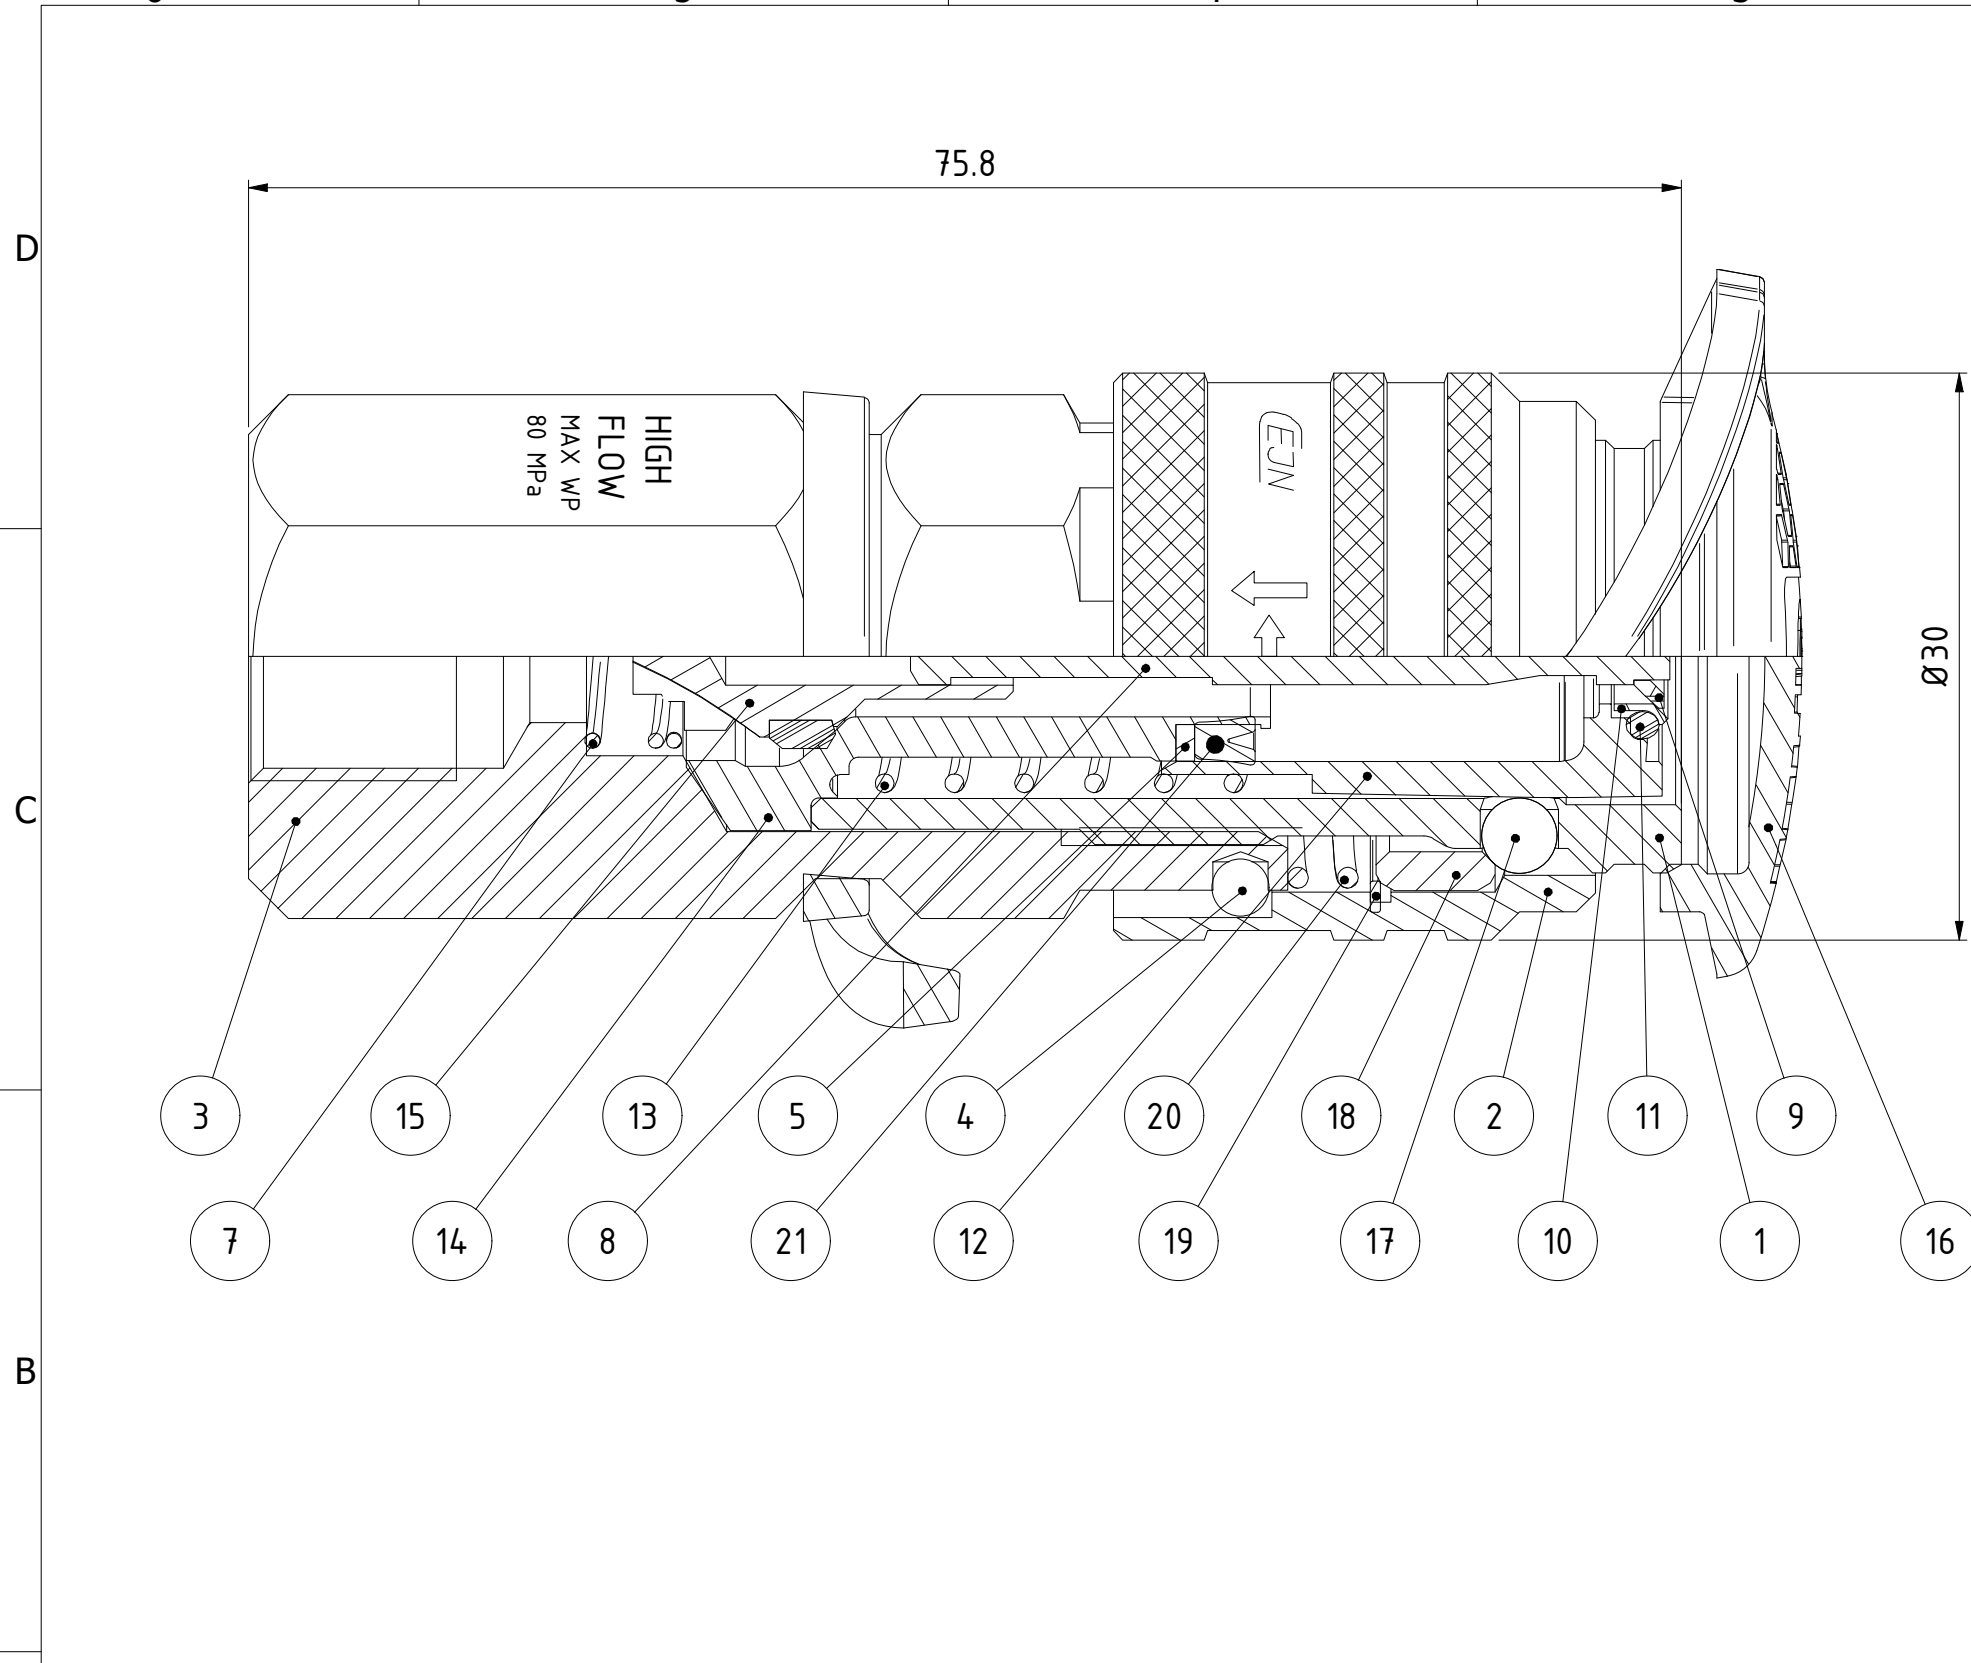

1 : 1

21	1	Lip seal	NBR 80°±3° Shore (mtrl code N80/127)
20	1	Spring	Stainless steel
19	1	Spiral retaining ring	Carbon steel
18	1	Locking sleeve	Hardened steel
17	9	Ball	Stainless steel
16	1	Dust Cap	TPE, red
15	1	Valve	Steel FeZn5 / NBR
14	1	Valve seat	Steel
13	1	Spring	Steel
12	1	Ratchet sleeve	Steel, FeZn5
11	1	O-ring	NBR
10	1	O-ring sleeve	Stainless steel
9	1	Washer	Steel
8	1	Pin	Steel
7	1	Spring	Steel
5	1	Back-up ring	POM
4	1	Ball Ø3.0 - AISI 420C	Stainless steel
3	1	Back part	Steel, Zn 8 silver
2	1	Locking sleeve	Steel, Zn-Fe 5 black
1	1	Front part	Steel, Zn 8 Silver
Item	Qty	Description	Material

Product No.	101152202
Nominal flow Ø DN:	4 mm
Connection Stroke:	18.3 mm
Max WP Connected:	800 bar
Max WP Disconnected:	800 bar
Min BP Connected:	2400 bar
Min BP Disconnected:	2400 bar
Temperature range:	-30°C - +100°C
Connection:	G 1/4" Fem
Sealing material:	NBR
Hexagon:	24

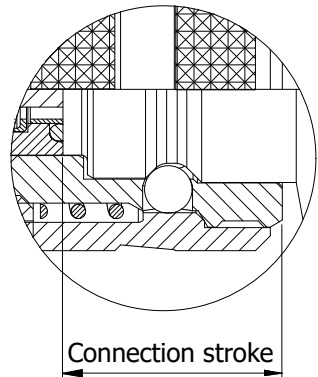

Connection stroke

10 bar = 1 MPa

State Production	Drawn CABNiHa	Checked FR	Approved AO
Date 2023-03-21	ECO 001557	Former No.	Scale 5 : 2
Drawing No. 101152202			Issue D
Sheet 1/(1)			



Assembly Drawing