
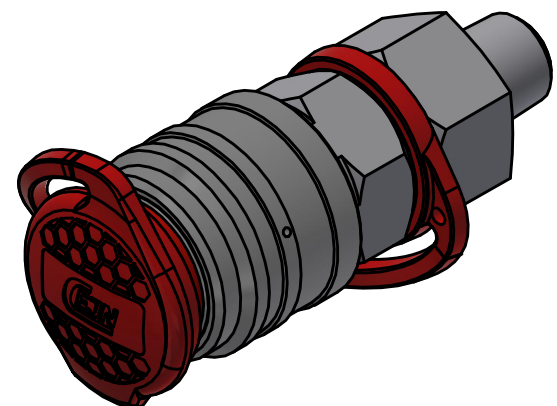



This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

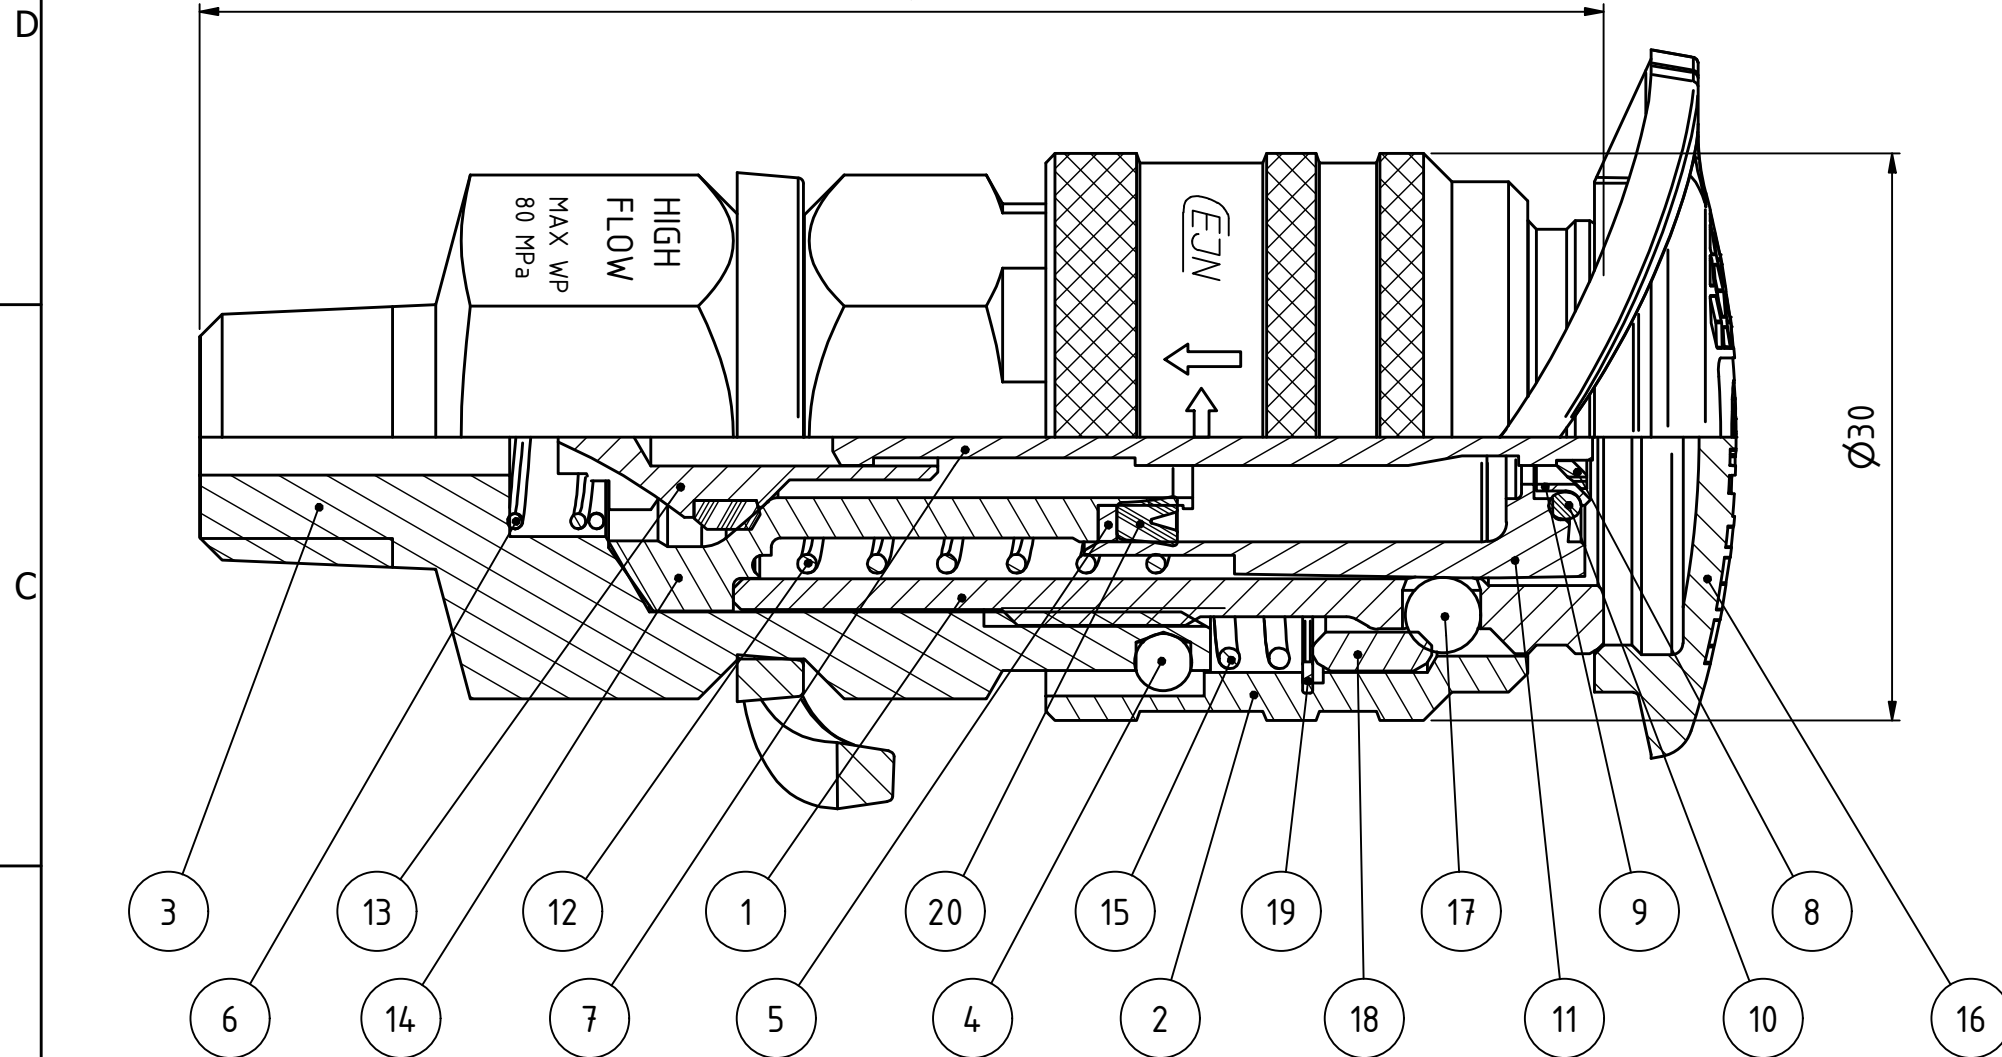

1 : 1

20	1	Lip seal	NBR 80°±3° Shore (mtrl code N80/127)
19	1	Spiral retaining ring	Carbon steel
18	1	Locking sleeve	Hardened steel
17	9	Ball	Stainless steel
16	1	Dust Cap	TPE, red
15	1	Spring	Stainless steel
14	1	Valve seat	Steel
13	1	Valve	Steel FeZn5 / NBR
12	1	Spring	Steel
11	1	Ratchet sleeve	Steel, FeZn5
10	1	O-ring	NBR
9	1	O-ring sleeve	Stainless steel
8	1	Washer	Steel
7	1	Pin	Steel
6	1	Spring	Steel
5	1	Back-up ring	POM
4	1	Ball Ø3.0 - AISI 420C	Stainless steel
3	1	Back part	Steel, Zn 8 silver
2	1	Locking sleeve	Steel, Zn-Fe 5 black
1	1	Front part	Steel, Zn 8 Silver
Item	Qty	Description	Material

Product No.	101152452
Nominal flow Ø DN:	4 mm
Connection Stroke:	18.3 mm
Max WP Connected:	800 bar
Max WP Disconnected:	800 bar
Min BP Connected:	2400 bar
Min BP Disconnected:	2400 bar
Temperature range:	-30°C - +100°C
Connection:	1/4" NPT Male
Sealing material:	NBR
Hexagon:	24

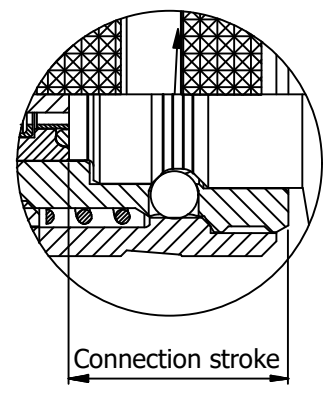

10 bar = 1 MPa

State
Production

Date
2023-03-21

ECO
001557

Assembly Drawing

Drawn
CABNiHa

Checked
FR

Former No.

Drawing No.
101152452

Approved
AO

Scale
5 : 2

Issue
D

Sheet
1 /(1)