

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C

B

A

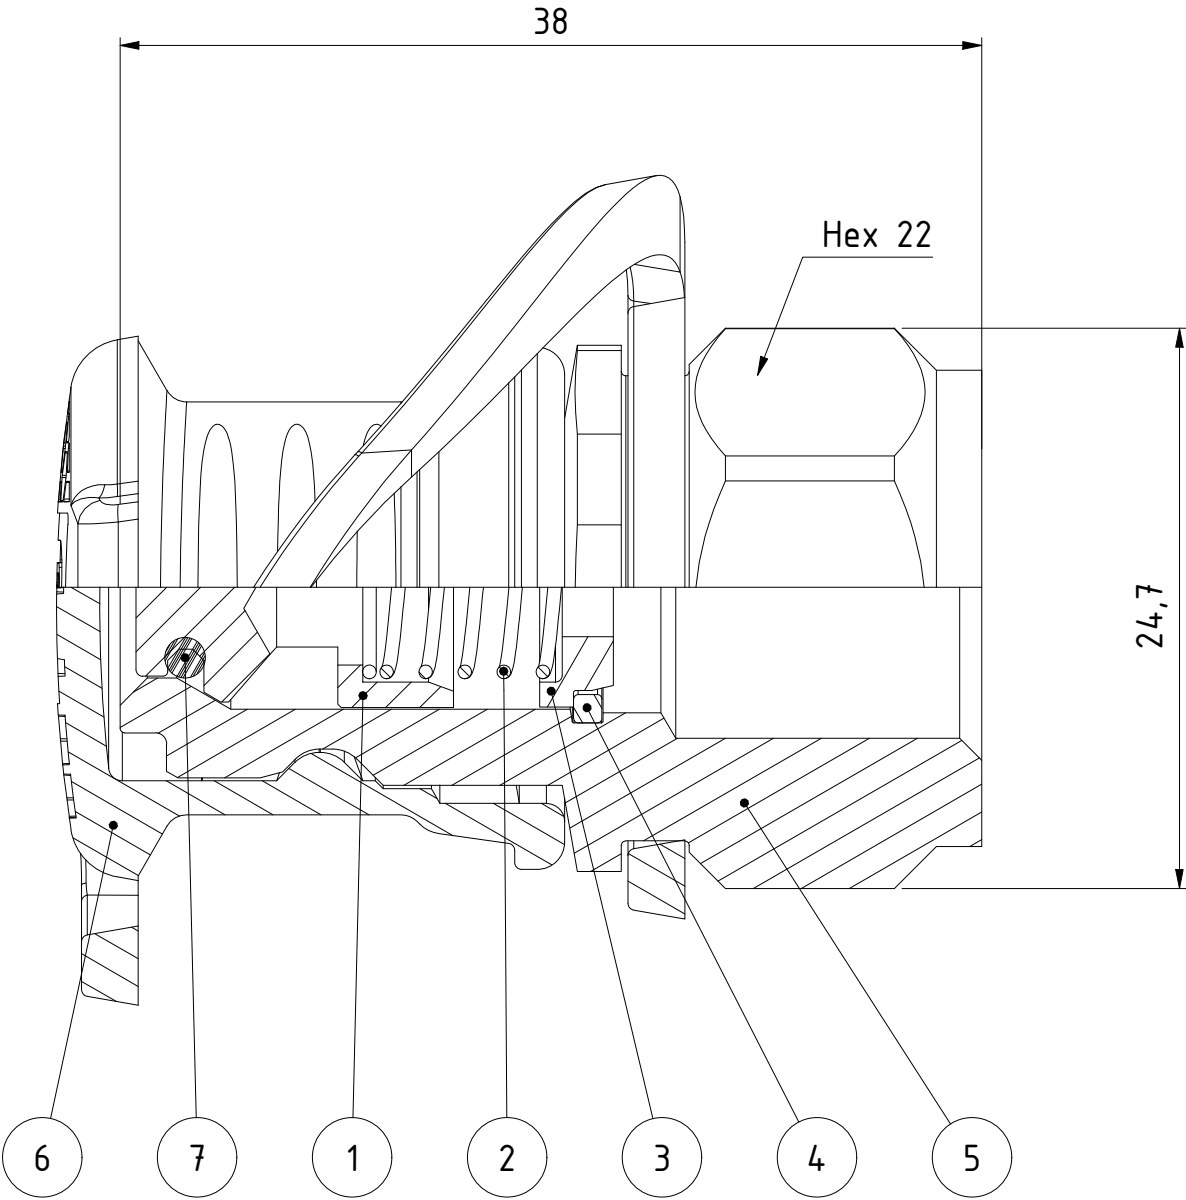

1 : 1

Product No. 101156207

Nominal flow $\varnothing$ DN: 2.5 mm
Connection Stroke: mm
Max WP Connected: 1000 bar
Max WP Disconnected: 1000 bar
Min BP Connected: 2600 bar
Min BP Disconnected: 2600 bar
Temperature range: -15°C - +100°C
Connection: G 1/4" Fem
Sealing material: FPM
Hexagon: 22

7	1	O-ring	FPM
6	1	Dust cap	TPE
5	1	Nipple body	Steel, FeZn5 c 1A
4	1	Lock ring	Steel
3	1	Stop for valve	Steel
2	1	Spring	Steel
1	1	Valve	Brass
Item	Qty	Description	Material



Scale	Drawn	Checked	Appr.	ECO	Date
3 : 1	CABST	AO	JE		2022-06-10

Assembly Drawing 501156207

Issue	Sheet
AB	1 /(1)