
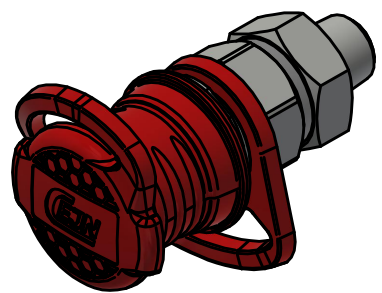


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

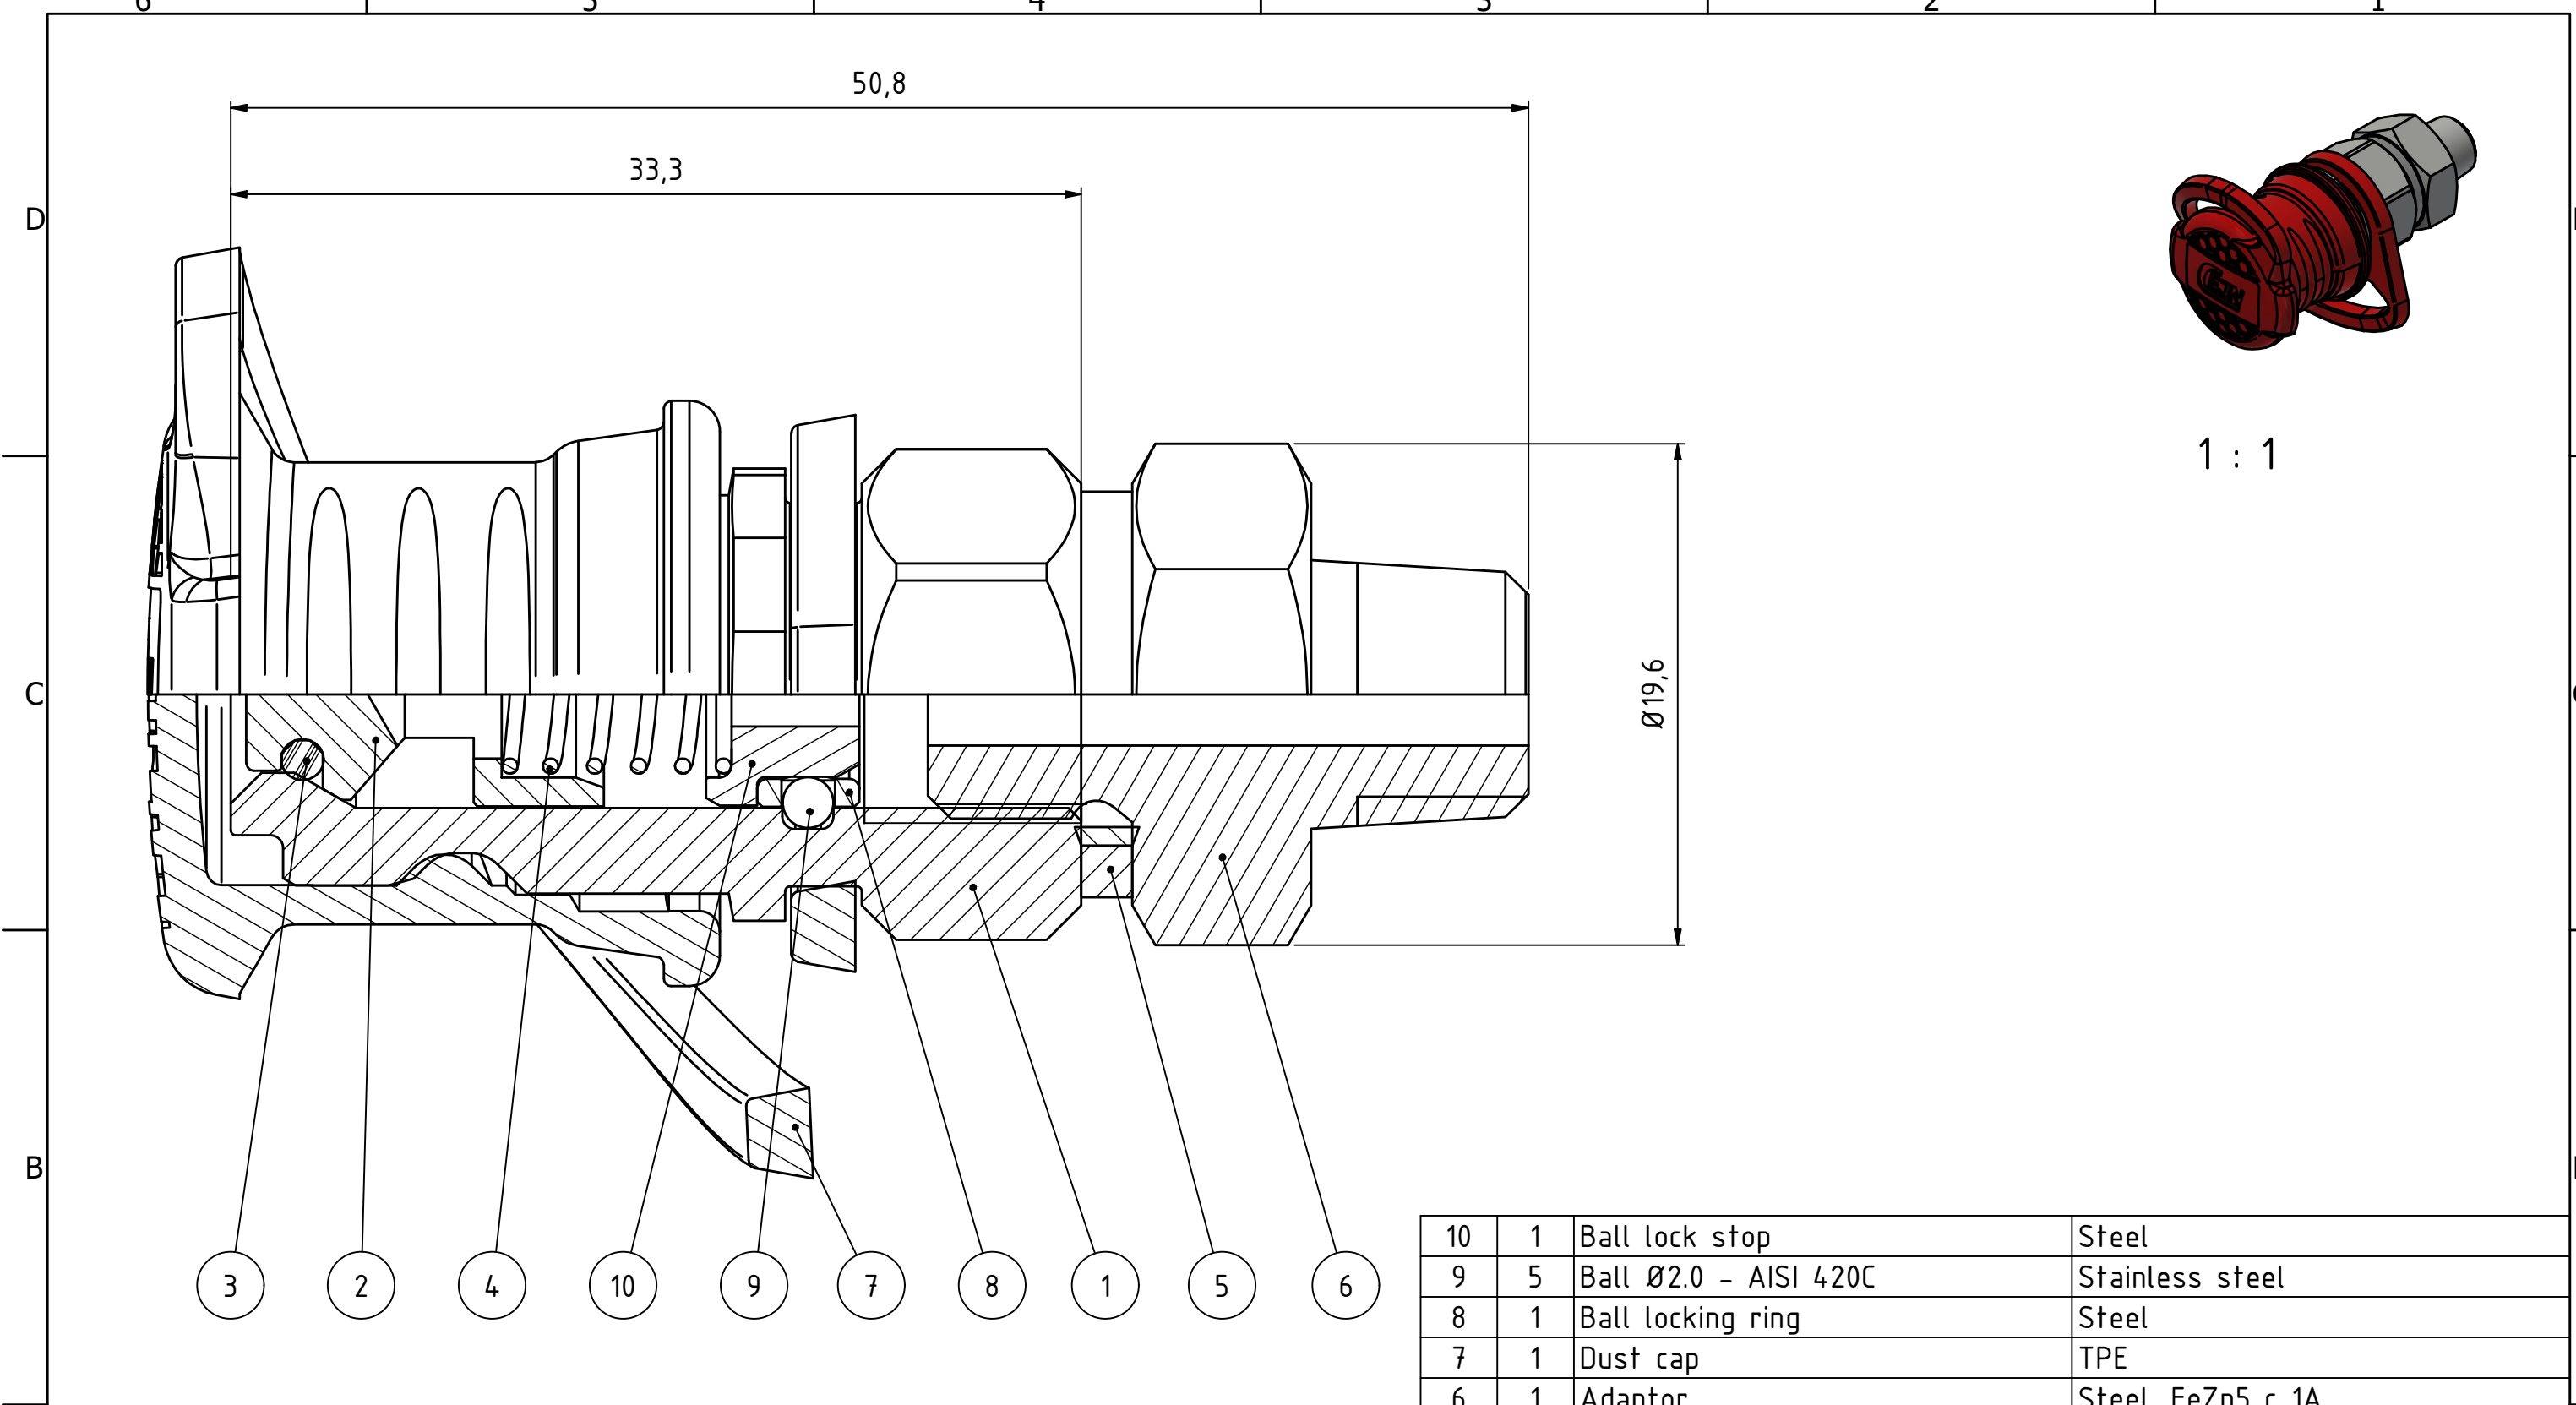

1 : 1

Product No. 101156451	
Nominal flow Ø DN:	2,5 mm
Connection Stroke:	mm
Max WP Connected:	1000 bar
Max WP Disconnected:	1000 bar
Min BP Connected:	2600 bar
Min BP Disconnected:	2600 bar
Temperature range:	-30°C - 100°C
Connection:	1/8" NPT male
Sealing material:	NBR
Hexagon:	17

10	1	Ball lock stop	Steel
9	5	Ball Ø2.0 - AISI 420C	Stainless steel
8	1	Ball locking ring	Steel
7	1	Dust cap	TPE
6	1	Adaptor	Steel, FeZn5 c 1A
5	1	Seal	High strength steel / NBR
4	1	Spring	Steel
3	1	O-ring	NBR
2	1	Valve	Brass
1	1	Nipple body	Hard. steel, FeZn5 c 1A
Item	Qty	Description	Material

State Production		Drawn CABNIHA	Checked AO	Approved MRo	Date 2024-02-22
 Nipple 1/8" NPT male NBR		ECO 001820		Former No.	
		Drawing No. 101156451		Issue C	Scale 4 : 1 Sheet 1 / (1)