

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

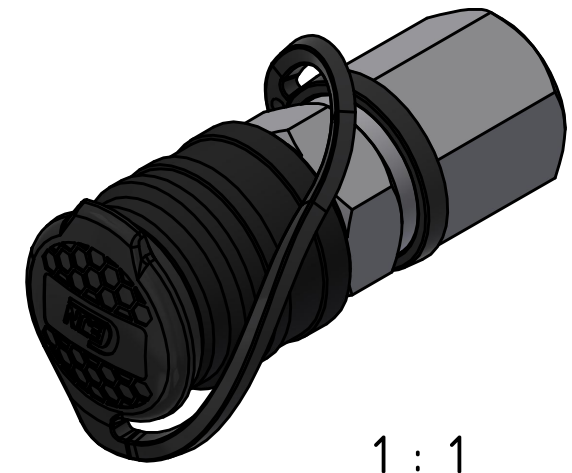

1 : 1

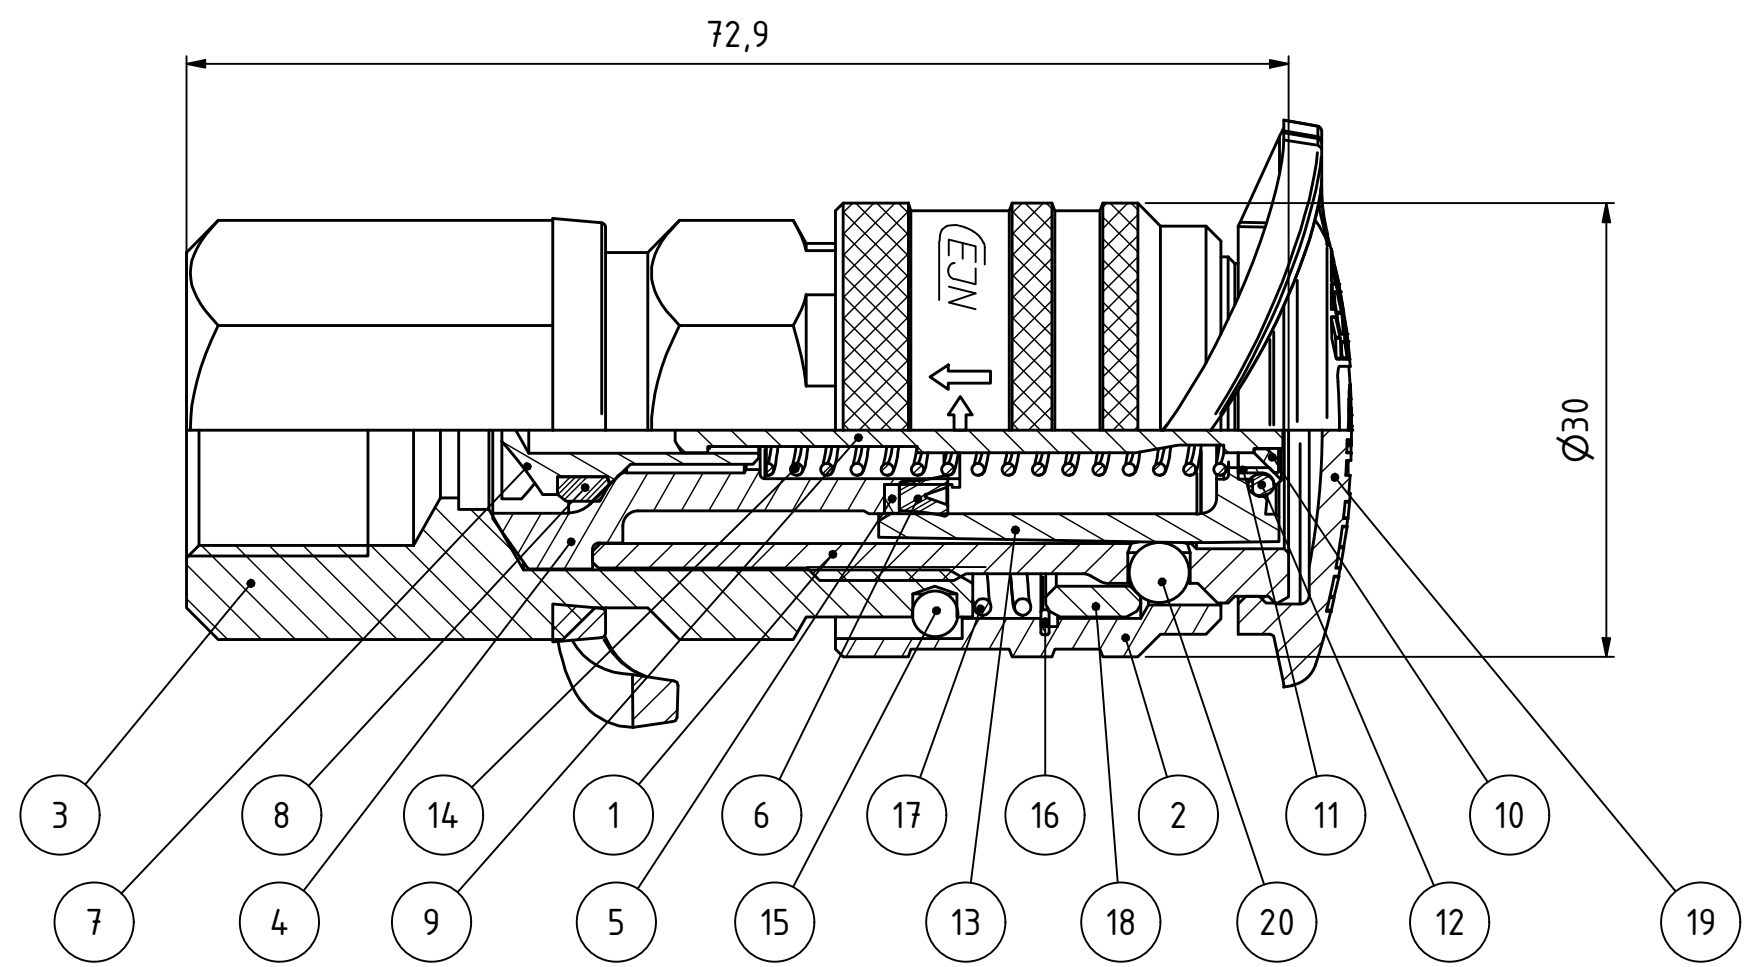

Connection stroke

Product No. 101161229	
Nominal flow Ø DN:	2.5 mm
Connection Stroke:	17.3 mm
Max WP Connected:	1000 bar
Max WP Disconnected:	1000 bar
Min BP Connected:	3000 bar
Min BP Disconnected:	3000 bar
Temperature range:	-30°C - +100°C
Connection:	G 3/8" Fem
Sealing material:	NBR
Hexagon:	24

20	9	Ball	Stainless steel
19	1	Dust Cap	TPE, black
18	1	Locking sleeve	Hardened steel
17	1	Spring	Stainless steel
16	1	Spiral retaining ring	Carbon steel
15	1	Ball Ø3.0 - AISI 420C	Stainless steel
14	1	Spring	Steel
13	1	Ratchet sleeve	Hard. steel, FeZn5
12	1	O-ring	NBR
11	1	O-ring sleeve	Steel
10	1	Washer	Steel
9	1	Pin	Steel
8	1	Seal	NBR
7	1	Valve	Steel, FeZn5
6	1	Lip seal	NBR
5	1	Back-up ring	POM
4	1	Valve seat	Steel
3	1	Back part	Steel, Zn 8 silver
2	1	Locking sleeve	Steel, Zn-Fe 5 black
1	1	Front part	Steel, Zn 8 Silver
Item	Qty	Description	Material

State Production		Drawn CABNiHa	Checked FR	Approved AO	
Date 2023-03-21		ECO 001557	Former No.	Scale 2 : 1	
Drawing No. 101161229			Issue C	Sheet 1 / (1)	



Assembly Drawing

101161229