


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

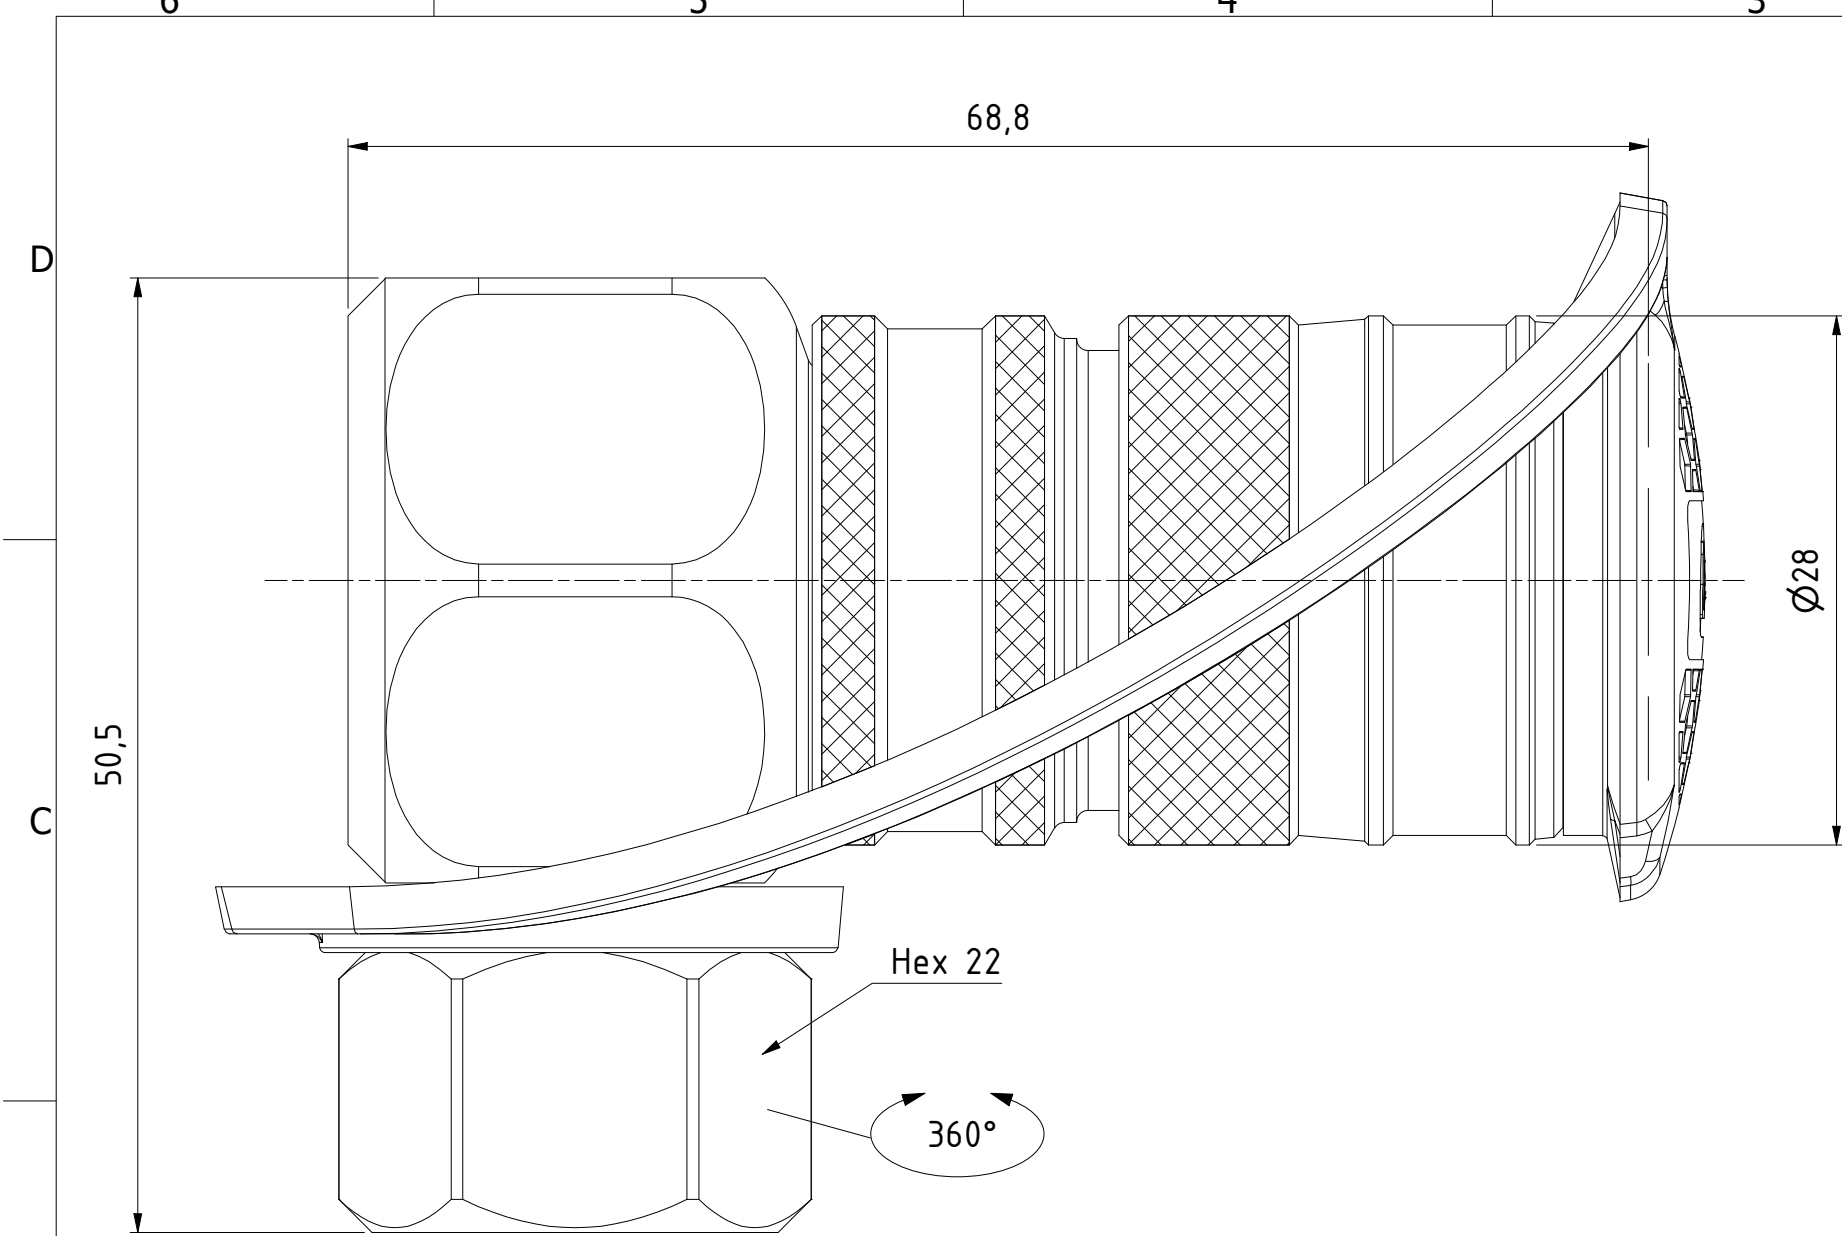

26	2	Back up ring	POM-C
25	3	Lip seal	NBR 80°±3° Shore (mtrl code N80/127)
24	1	Dust Cap	TPE, black
23	1	Swivel connection	Steel, Zn 8 Silver
22	1	Sleeve	Steel, Zn-Ni 10 black
21	2	Ball	Stainless steel
20	1	Distance sleeve	Steel
19	2	Back-up ring	PTFE
18	1	Nut	Steel, Zn 8 silver
17	1	Locking screw	Steel, Zn 8 Silver
16	1	Swivel housing	Steel, Chemical nickel plated
15	1	Locking sleeve	Hard.steel, Zn-Ni 10 black
14	9	Ball	Stainless steel
13	1	Spring	Stainless steel
12	1	O-ring	NBR
11	1	O-ring	NBR
10	1	Spring housing	Steel
9	1	O-ring sleeve	Steel
8	1	Expansion sleeve	Plastic
7	1	Washer	Steel
6	1	Spring	Steel
5	1	Seal	NBR
4	1	Valve	Steel, FeZn5
3	1	O-ring	NBR
2	1	Valve seat	Steel
1	1	Front part	Steel, Zn 8 silver
Item	Qty	Description	Material

Product No.	101161250
Nominal flow Ø DN:	2.5 mm
Connection Stroke:	18.4 mm
Max WP Connected:	1500 bar
Max WP Disconnected:	1500 bar
Min BP Connected:	3000 bar
Min BP Disconnected:	3000 bar
Temperature range:	-30°C - +100°C
Connection:	G 1/4" Fem (CMS)
Sealing material:	NBR
Hexagon:	22

Scale

5:2

Drawn

cabao

Checked

FR

Appr.

JE

ECO

12067

Date

Drawing No.

101161250

Issue

C

Sheet

1 /(1)

Assembly Drawing