

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





D

C

B

A

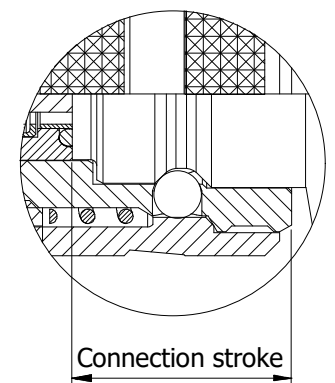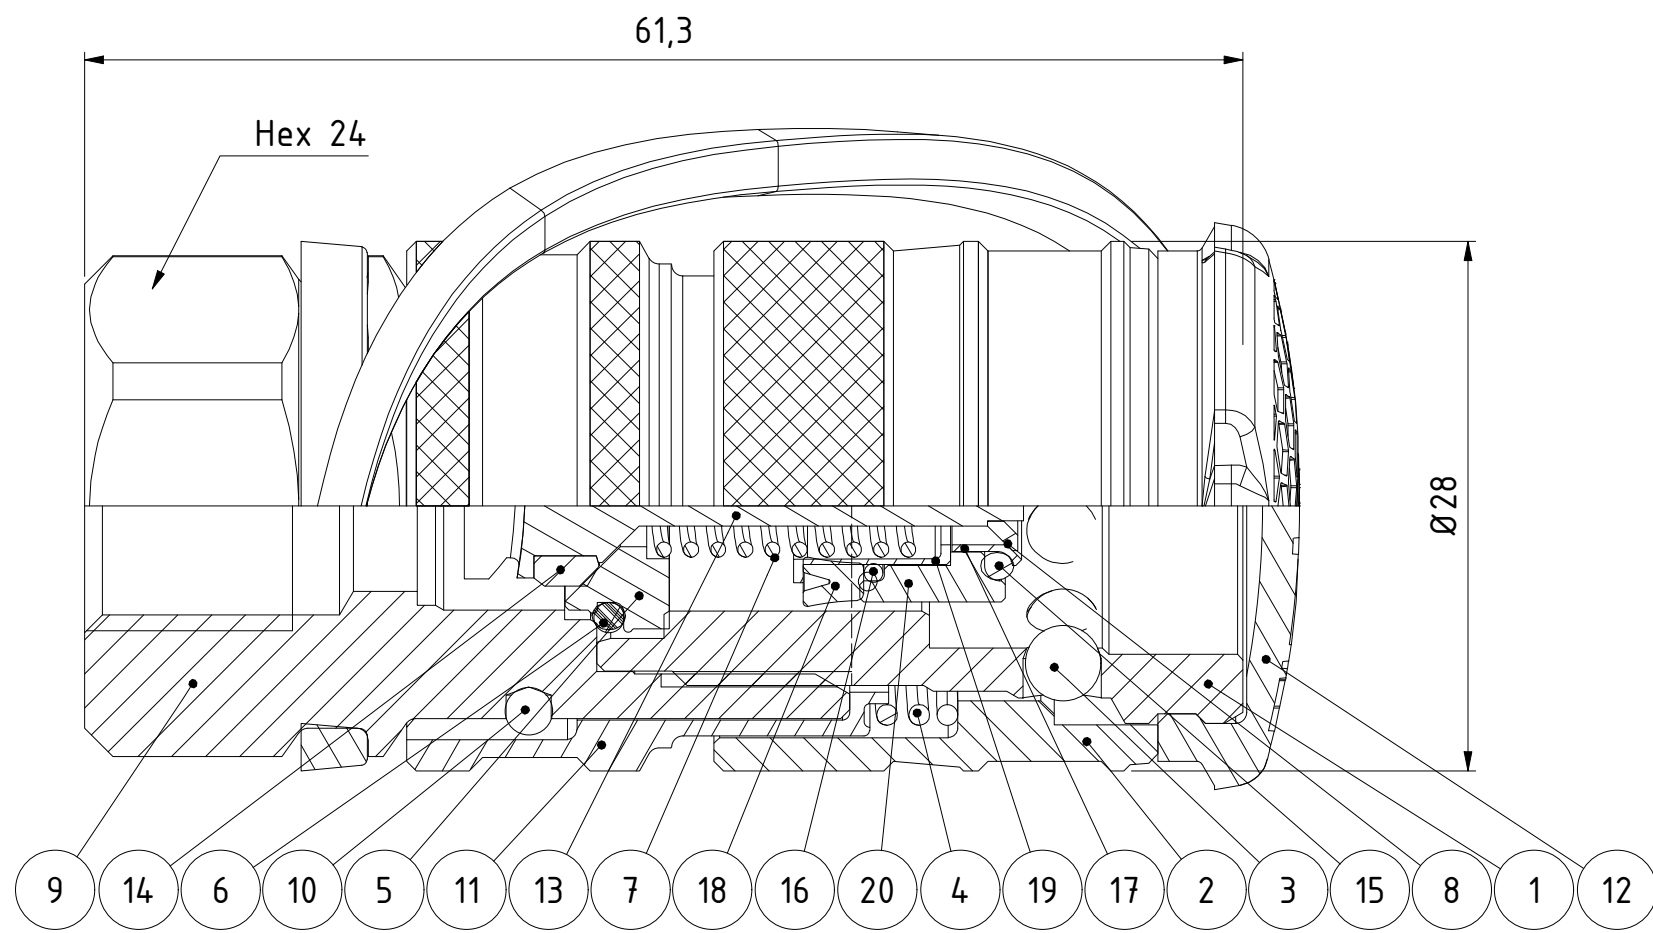

1 : 1

20	1	Expansion sleeve	Plastic
19	1	Spring housing	Stainless steel
18	1	Lip seal	NBR 80°±3° Shore (mtrl code N80/127)
17	1	O-ring sleeve	Stainless steel
16	1	O-ring	NBR
15	1	O-ring	NBR
14	1	Seal	NBR
13	1	Valve	Stainless steel
12	1	Dust Cap	TPE, black
11	1	Sleeve	Stainless steel
10	2	Ball	Stainless steel
9	1	Back part	Stainless steel
8	1	Washer	Stainless steel
7	1	Spring	Stainless steel
6	1	O-ring	NBR
5	1	Valve seat	Stainless steel
4	1	Spring	Stainless steel
3	9	Ball	Stainless steel
2	1	Locking sleeve	Stainless steel
1	1	Front part	Acid proof steel.
Item	Qty	Description	Material

Product No. 101161746	
Nominal flow Ø DN:	2.5 mm
Connection Stroke:	18.3 mm
Max WP Connected:	1500 bar
Max WP Disconnected:	1500 bar
Min BP Connected:	3000 bar
Min BP Disconnected:	3000 bar
Temperature range:	-30°C - +100°C
Connection:	G 1/4" Fem
Sealing material:	NBR
Hexagon:	24

Scale5:2

DrawnCABAO

CheckedFR

Appr.JE

ECO12063

Date2018-04-24

Assembly Drawing101161746

Drawing No.

IssueB

Sheet1/(1)