


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



|                       |                |
|-----------------------|----------------|
| Product No. 101163161 |                |
| Nominal flow Ø DN:    | 2.5 mm         |
| Connection Stroke:    | - mm           |
| Max WP Connected:     | 1500 bar       |
| Max WP Disconnected:  | 1500 bar       |
| Min BP Connected:     | 3000 bar       |
| Min BP Disconnected:  | 3000 bar       |
| Temperature range:    | -30°C - +100°C |
| Connection:           | -              |
| Sealing material:     | NBR            |
| Hexagon:              |                |

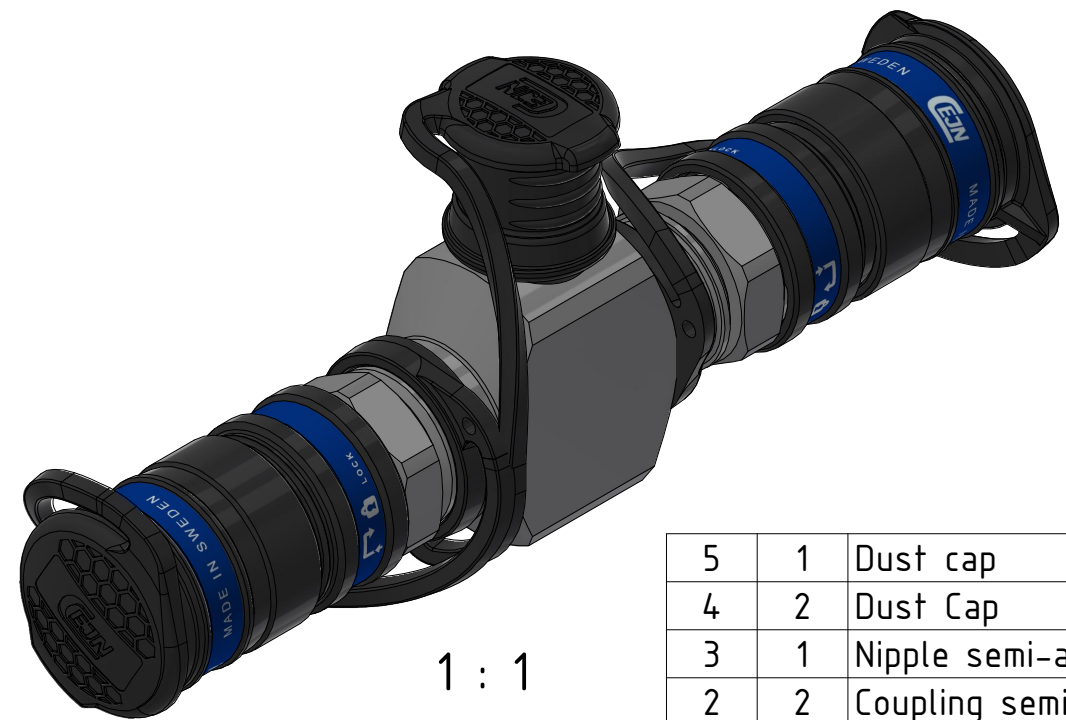

1 : 1

|      |     |                        |                     |                 |
|------|-----|------------------------|---------------------|-----------------|
| 5    | 1   | Dust cap               | TPE, black          | 091151067       |
| 4    | 2   | Dust Cap               | TPE, black          | 091151014       |
| 3    | 1   | Nipple semi-assembly   | Steel / NBR         | 091157480       |
| 2    | 2   | Coupling semi-assembly | Steel / NBR         | 091169041       |
| 1    | 1   | T-block                | Steel, FeZn 8P1 T/N | 091164101       |
| Item | Qty | Description            | Material            | Part Number     |
|      |     | Scale 1,5:1            | Drawn cabao         | Checked FR      |
|      |     | Appr. JE               | ECO 12149           | Date 2018-09-04 |
|      |     | Drawing No. 101163161  |                     | Issue B         |
|      |     | Sheet 1 / (1 )         |                     |                 |