

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

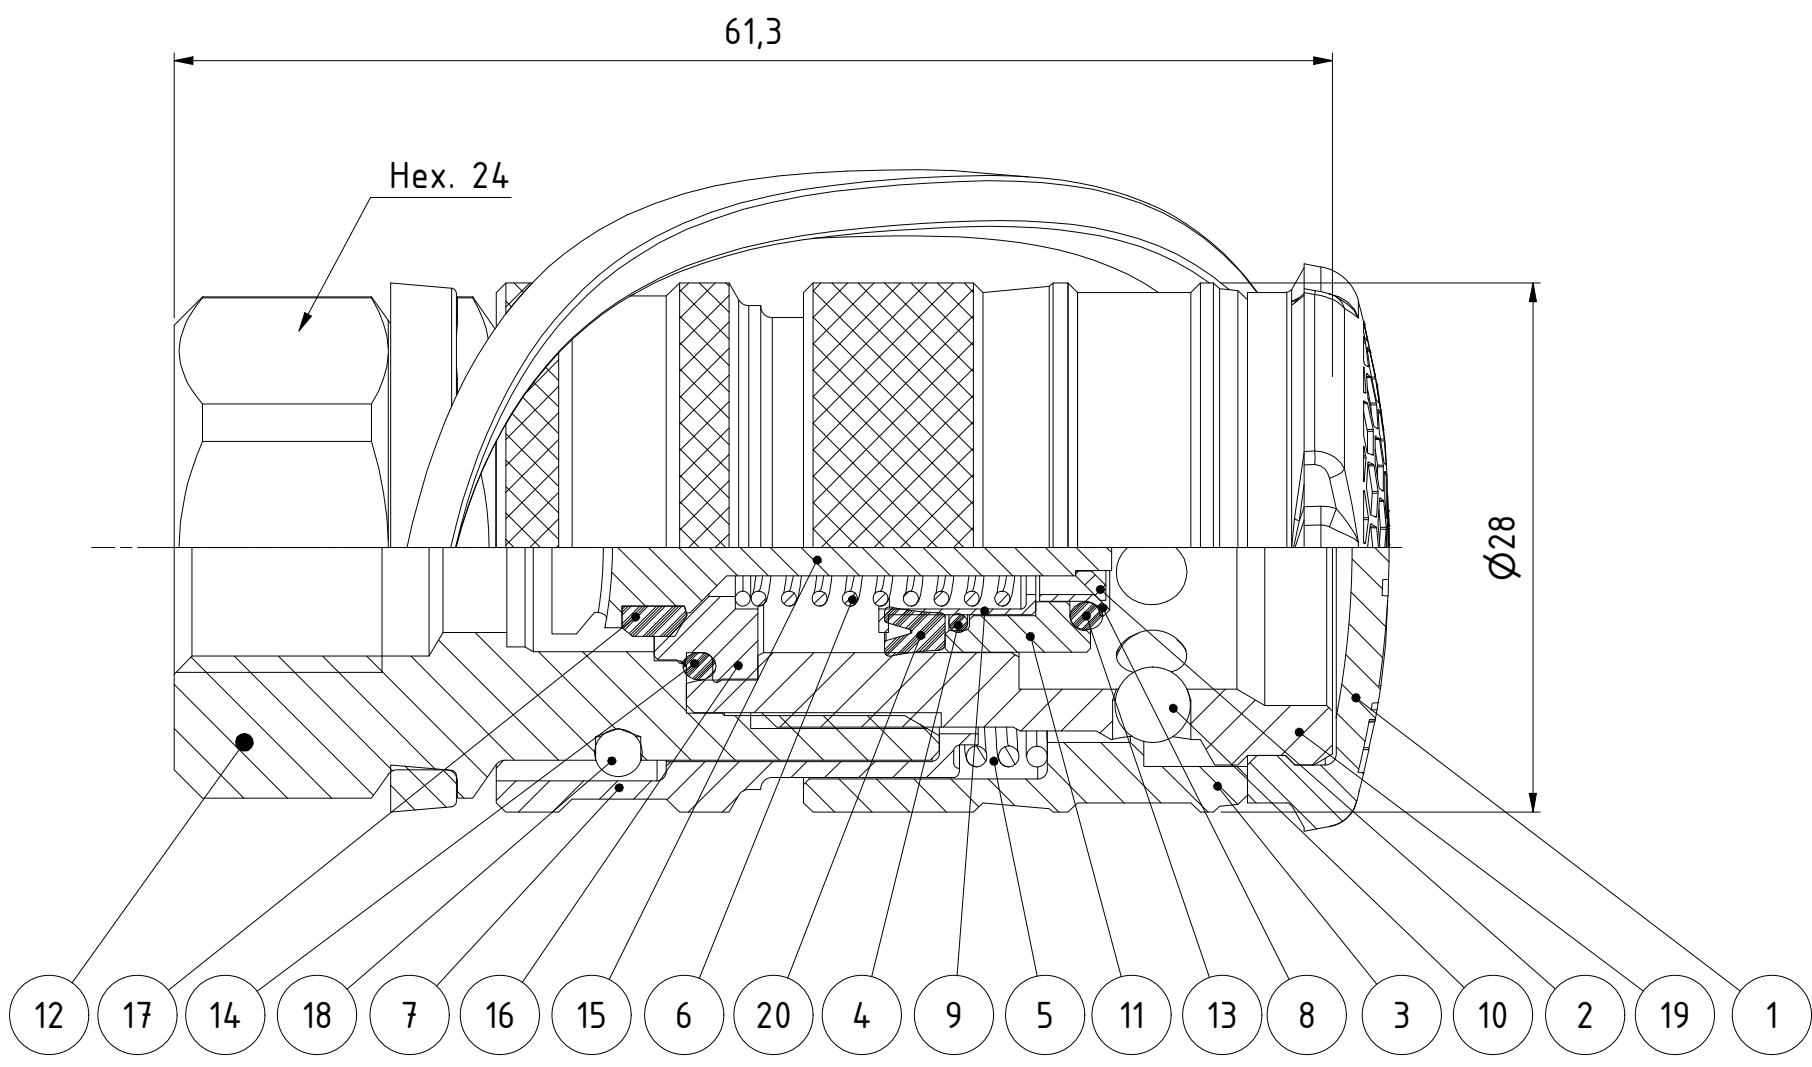


Quick action safety lock

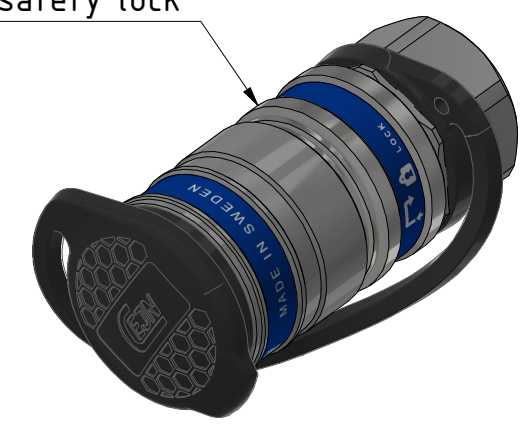

1 : 1

20	1	Lip seal	NBR 80°±3° Shore (mtrl code N80/127)
19	1	Front part	Steel, Zn 8 silver
18	2	Ball	Stainless steel
17	1	Seal	NBR
16	1	Valve seat	Steel
15	1	Valve	Steel, FeZn5
14	1	O-ring	NBR
13	1	O-ring	NBR
12	1	Back part	Steel, Zn 8 silver
11	1	Expansion sleeve	Plastic
10	9	Ball	Stainless steel
9	1	Spring housing	Steel
8	1	O-ring sleeve	Steel
7	1	Sleeve	Steel, Zn 8 silver
6	1	Spring	Steel
5	1	Spring	Stainless steel
4	1	O-ring	NBR
3	1	Locking sleeve	Hard. steel, Zn 8 Silver
2	1	Washer	Steel
1	1	Dust Cap	TPE, black
Item	Qty	Description	Material

Product No. 101171202	
Nominal flow Ø DN:	2.5 mm
Connection Stroke:	18.3 mm
Max WP Connected:	1000 bar
Max WP Disconnected:	1000 bar
Min BP Connected:	2600 bar
Min BP Disconnected:	2600 bar
Temperature range:	-30°C - +100°C
Connection:	G1/4" female
Sealing material:	NBR
Hexagon:	24

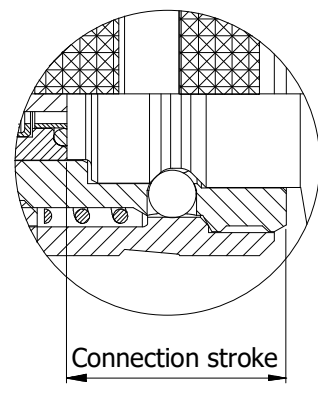

Scale 2,5 : 1

Drawn CABAO

Checked FR

Appr. AO

ECO 12061

Date 2018-04-19

Drawing No. 101171202

Issue B

Sheet 1 / (1)

Assembly Drawing