

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D

C

B

A

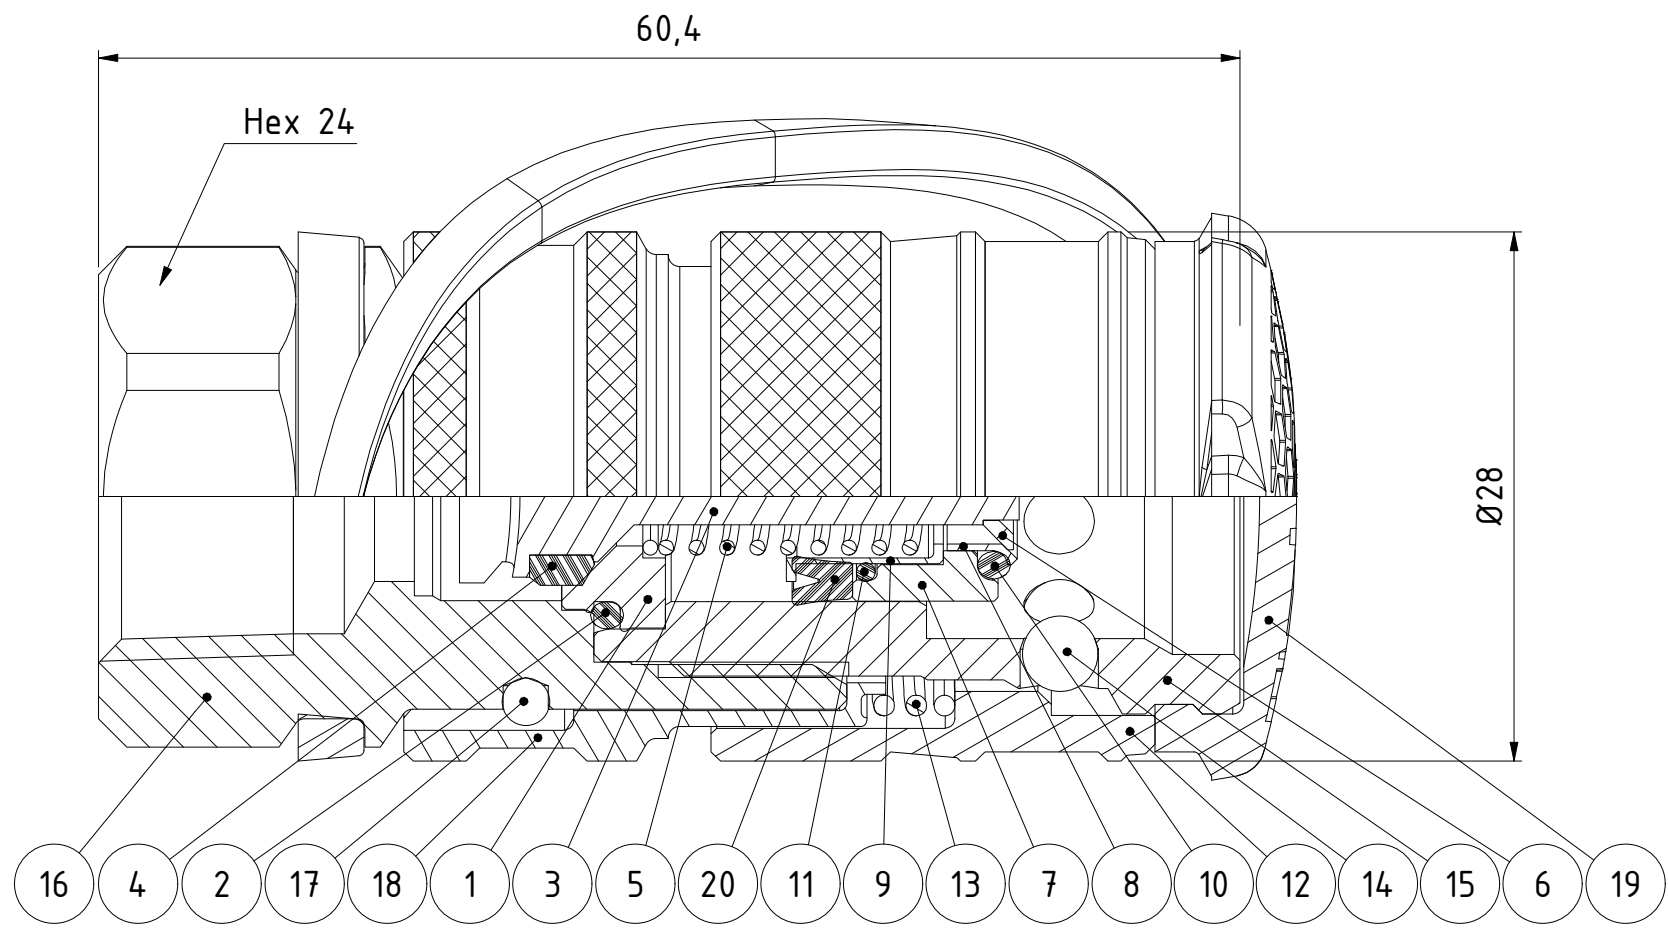


Quick action safety lock



1 : 1

Product No. 101171404	
Nominal flow Ø DN:	2,5 mm
Connection Stroke:	18,3 mm
Max WP Connected:	1000 bar
Max WP Disconnected:	1000 bar
Min BP Connected:	2600 bar
Min BP Disconnected:	2600 bar
Temperature range:	-30°C - +100°C
Connection:	3/8" NPT fem
Sealing material:	NBR
Hexagon:	24

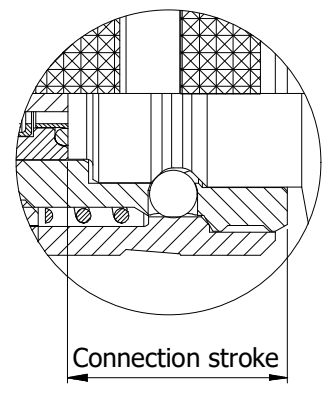

20	1	Lip seal	NBR 80°±3° Shore (mtrl code N80/127)
19	1	Dust Cap	TPE, black
18	1	Sleeve	Steel, Zn 8 silver
17	2	Ball	Stainless steel
16	1	Back part	Steel, Zn 8 silver
15	1	Front part	Steel, Zn 8 silver
14	9	Ball	Stainless steel
13	1	Spring	Stainless steel
12	1	Locking sleeve	Hard. steel, Zn 8 Silver
11	1	O-ring	NBR
10	1	O-ring	NBR
9	1	Spring housing	Steel
8	1	O-ring sleeve	Steel
7	1	Expansion sleeve	Plastic
6	1	Washer	Steel
5	1	Spring	Steel
4	1	Seal	NBR
3	1	Valve	Steel, FeZn5
2	1	O-ring	NBR
1	1	Valve seat	Steel
Item	Qty	Description	Material

Scale5:2

Drawn CABAO

Checked FR

Appr. JE

ECO12061

Date2018-04-22

Drawing No.

Issue

Sheet

Assembly Drawing

101171404

B

1 /(1)