


Product no: 10_217_1202		
Max working pressure:	720	bar connected
	720	bar disconnected
Min burst pressure:	1860	bar connected
	1860	bar disconnected
Sealing material:	NBR	
Temperatur range:	-30°C - +100 °C	
Nominal flow diameter,DN:	6.3	mm
Connection	G 1/4" Fem	
Connection stroke:	14.3	mm

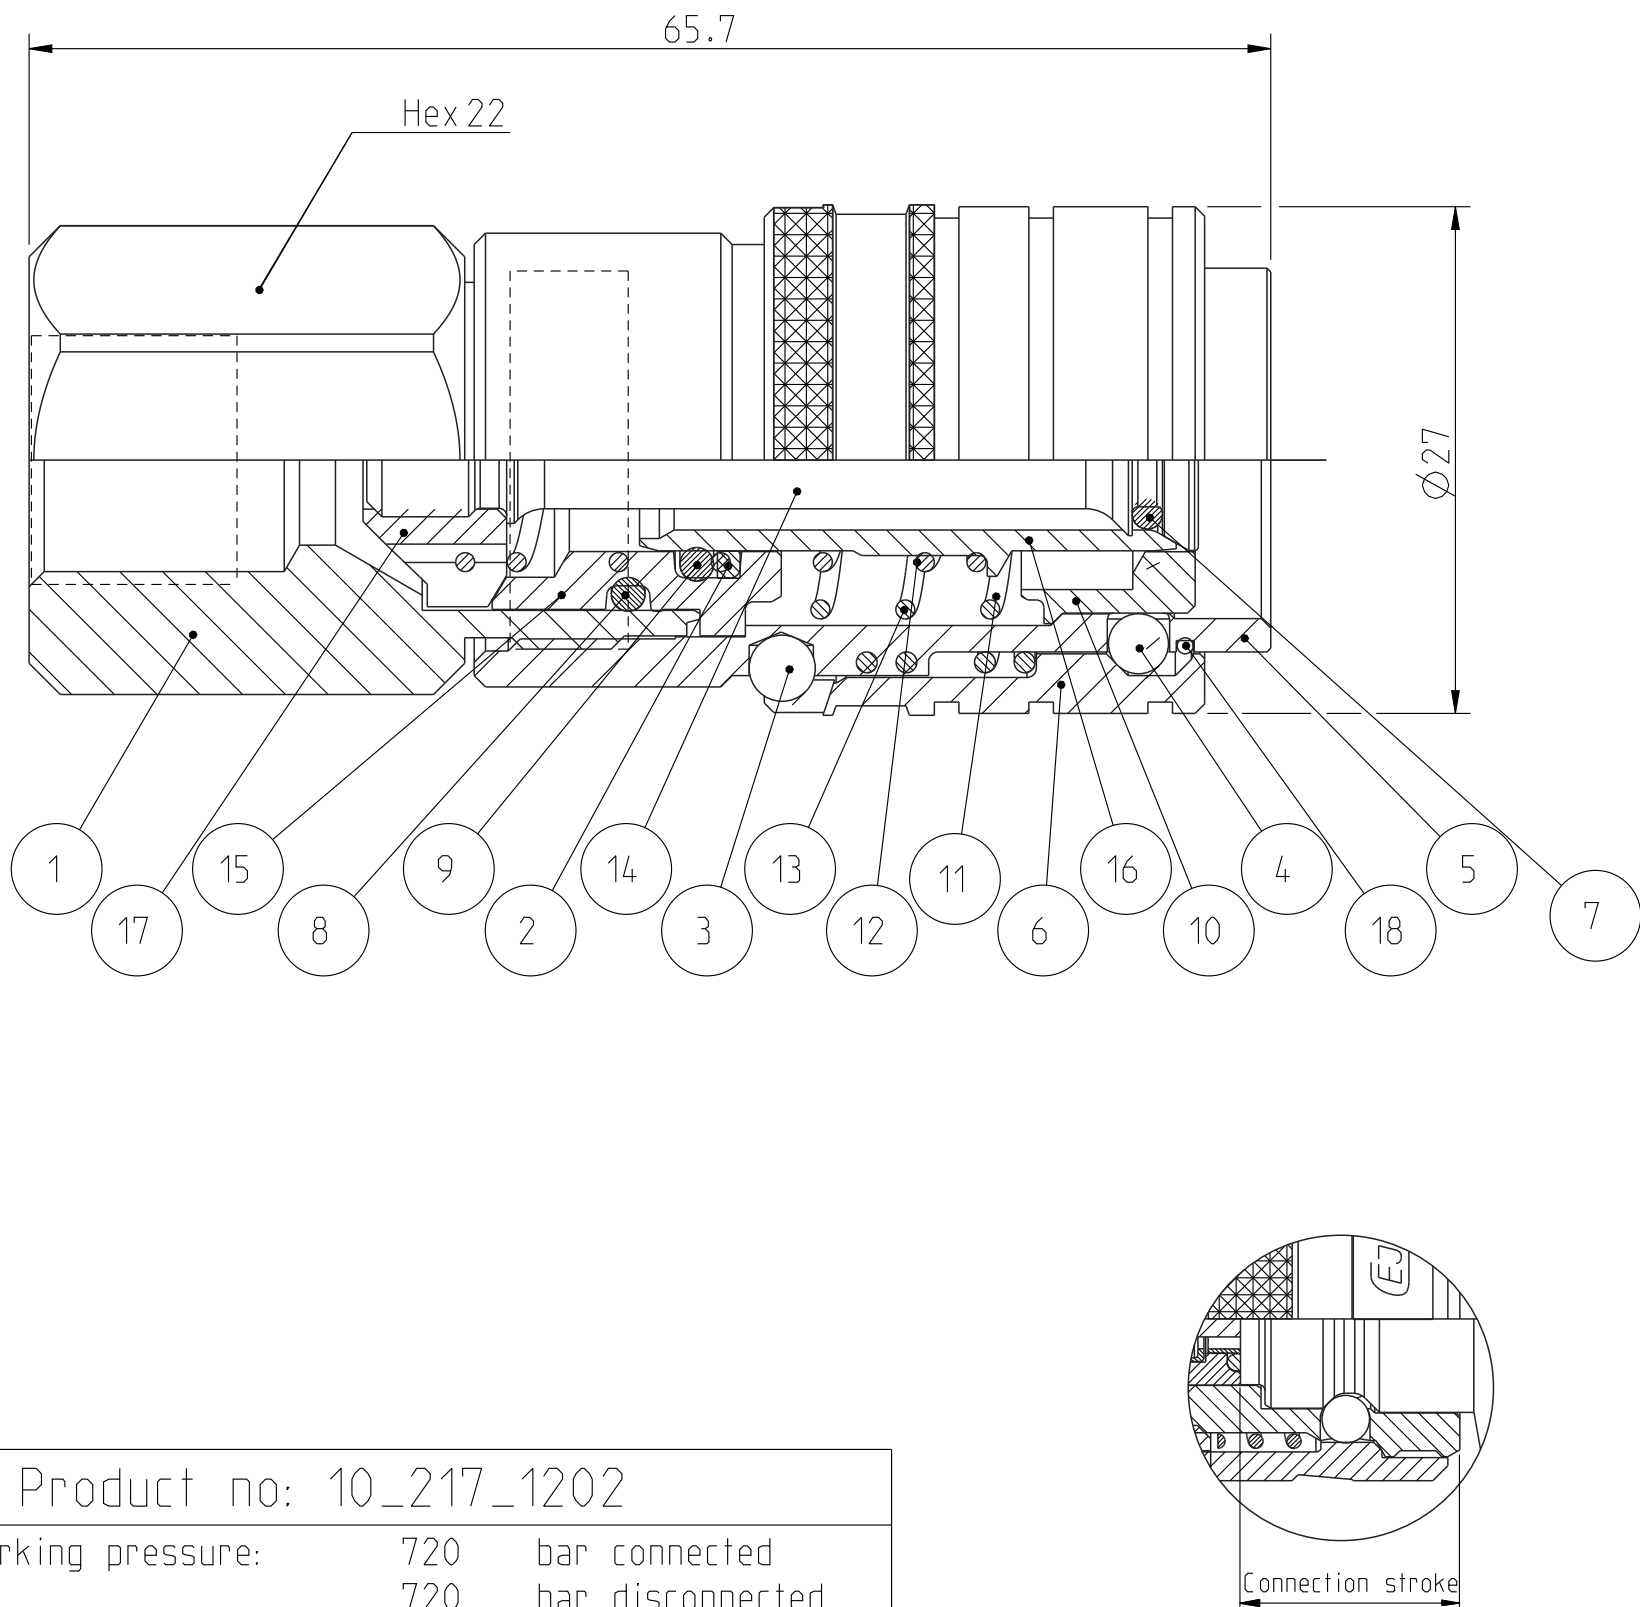

18	1	Wire coil	Stainless steel
17	1	Valve stop	Steel, Fe/Zn 8 P1
16	1	Valve sleeve	Steel, Zi 8 Silver
15	1	Valve seat	Steel, Fe/Zn 8 P1
14	1	Valve opener	Steel, Zn-Ni transparant
13	1	Spring	Stainless steel
12	1	Spring	Stainless steel
11	1	Spring	Stainless steel
10	1	Ratchet sleeve	Steel, Zn-Ni 9 transp
9	1	O-ring	NBR
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	Locking sleeve	Steel, Zn-Ni 10 black
5	1	Front part	Steel, Zn-Ni 9 Transp
4	12	Ball	Stainless steel
3	1	Ball	Stainless steel
2	1	Backup ring	Hytrel
1	1	Back part	Steel, Zn-Ni 9 Transp
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	5:2	Ritad Drawn	A0	Kontr. Checked	JE	Godk. Appr.	JE	Äm nr. Alt. no.	11365	Dat. Date	160210
	Assembly drawing							Ritning nr/Drawing No.			Utg./Issue	
							50_217_1202			AB		