
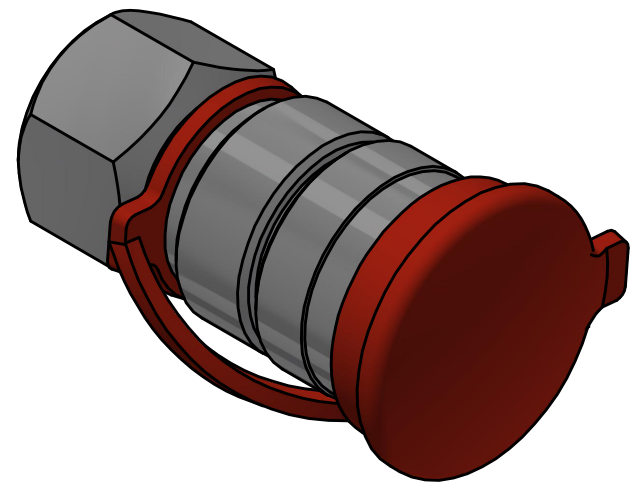


This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

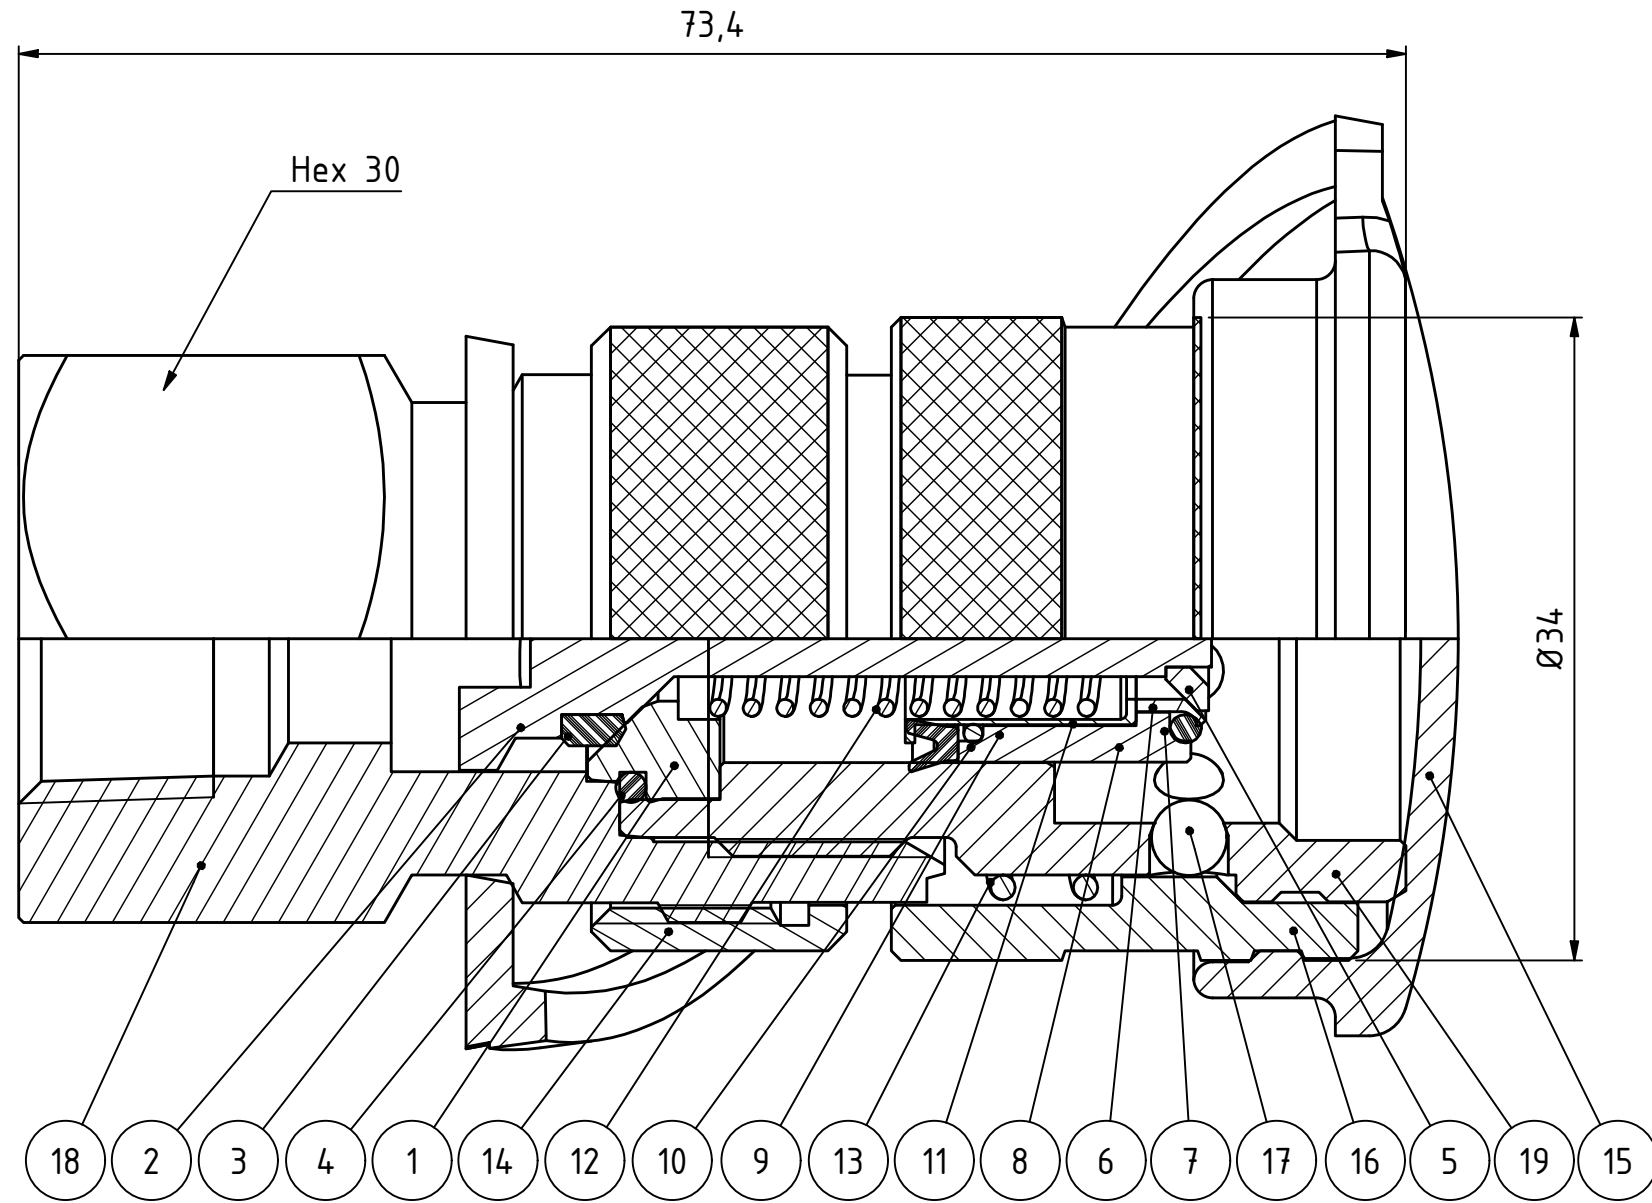

1 : 1

19	1	Front part	Steel, Zn 8 silver
18	1	Back part	Steel, Zn 8 silver
17	9	Ball	Stainless steel
16	1	Locking sleeve	Hard. steel, Zn 8 Silver
15	1	Dust cap	Plastic
14	1	Locking ring	Steel, Zn 8 Silver
13	1	Spring	Stainless steel
12	1	Spring	Steel
11	1	Spring housing	Steel
10	1	Lip-seal	NBR
9	1	O-ring	NBR
8	1	Expansion sleeve	Delrin
7	1	O-ring	NBR
6	1	Sleeve for o-ring	Steel
5	1	Washer	Steel
4	1	O-ring	NBR
3	1		
2	1	Valve	Steel, FeZn5
1	1	Valve seat	Steel
Item	Qty	Description	Material

Product No. 102181434	
Nominal flow Ø DN:	4.5 mm
Connection Stroke:	20.1 mm
Max WP Connected:	1000 bar
Max WP Disconnected:	1000 bar
Min BP Connected:	2800 bar
Min BP Disconnected:	2800 bar
Temperature range:	-30°C - +100°C
Connection:	3/8" NPT Fem
Sealing material:	NBR
Hexagon:	30



Scale5:2

DrawnCABAO

CheckedFR

Appr.JE

ECO

Date2019-11-14

IssueA

Sheet1/(1)

Assembly Drawing

102181434