



This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©

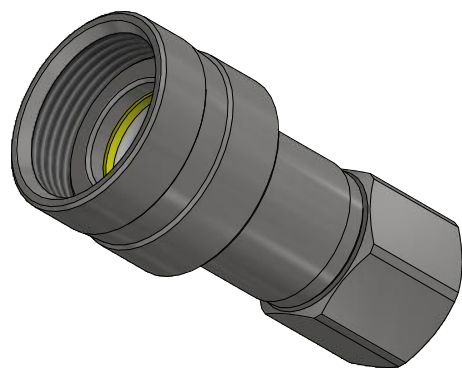

D
C
B
A

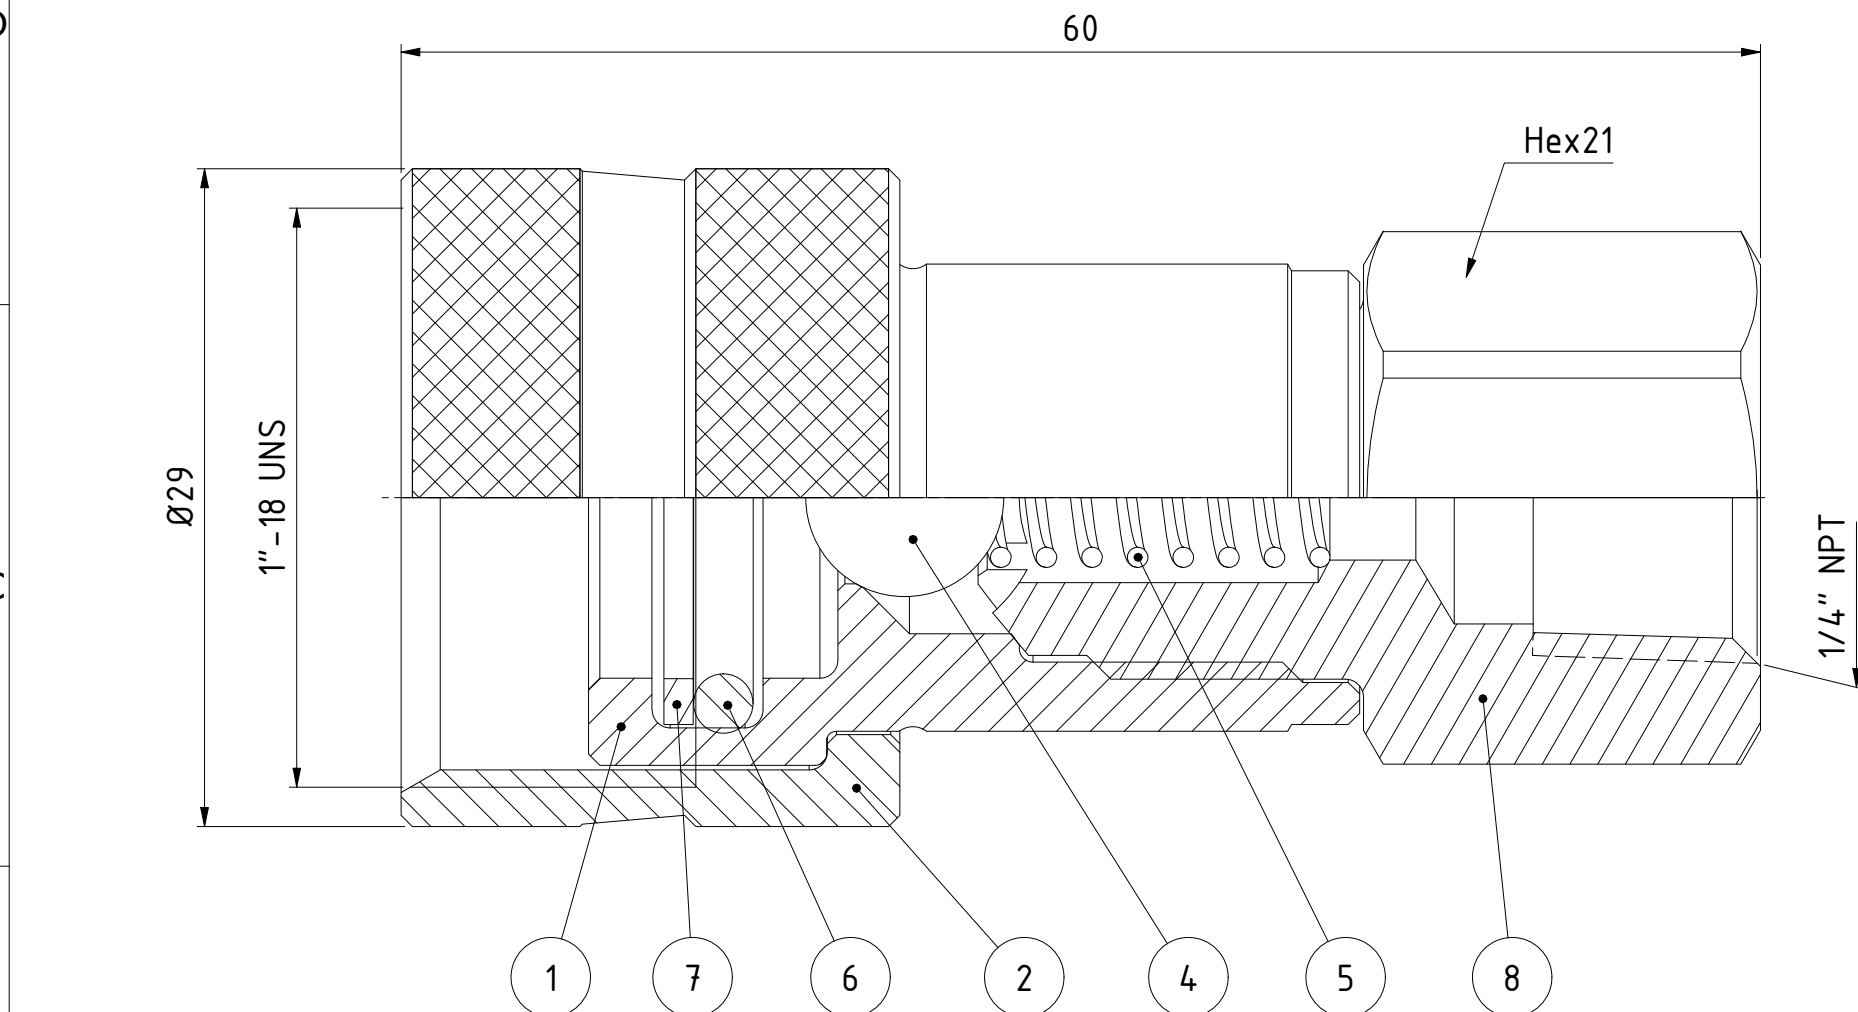

1 : 1

D
C
B
A

Compliant with ISO 14540

Product No. 102321402	
Nominal flow Ø DN:	6 mm
Connection Stroke:	mm
Max WP Connected:	720 bar
Max WP Disconnected:	720 bar
Min BP Connected:	2160 bar
Min BP Disconnected:	1440 bar
Temperature range:	-30°C - +100°C
Connection:	1/4" NPT female
Sealing material:	NBR
Hexagon:	21

8	1	Back part	Steel, Zn 8 silver
7	1	Back-up ring	Hytrel
6	1	O-ring	NBR
5	1	Spring	Steel
4	1	Ball	Chrome steel
2	1	Locking Sleeve	Steel, Zn 8 silver
1	1	Coupling body	Steel, Zn 8 silver
Item	Qty	Description	Material



Scale
3 : 1

Drawn
CABAO

Checked
FR

Appr.
JE

ECO
000926

Date
2021-05-10

Assembly Drawing 502321402

Drawing No.

Issue
AC

Sheet
1 /(1)