

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B



A

D

C

B

A

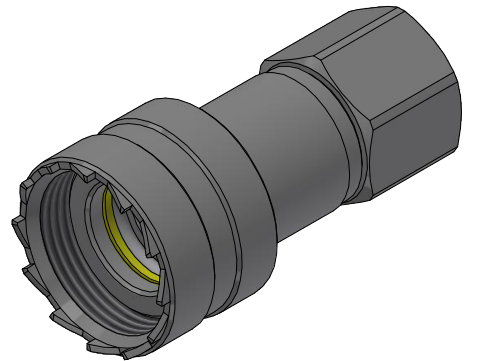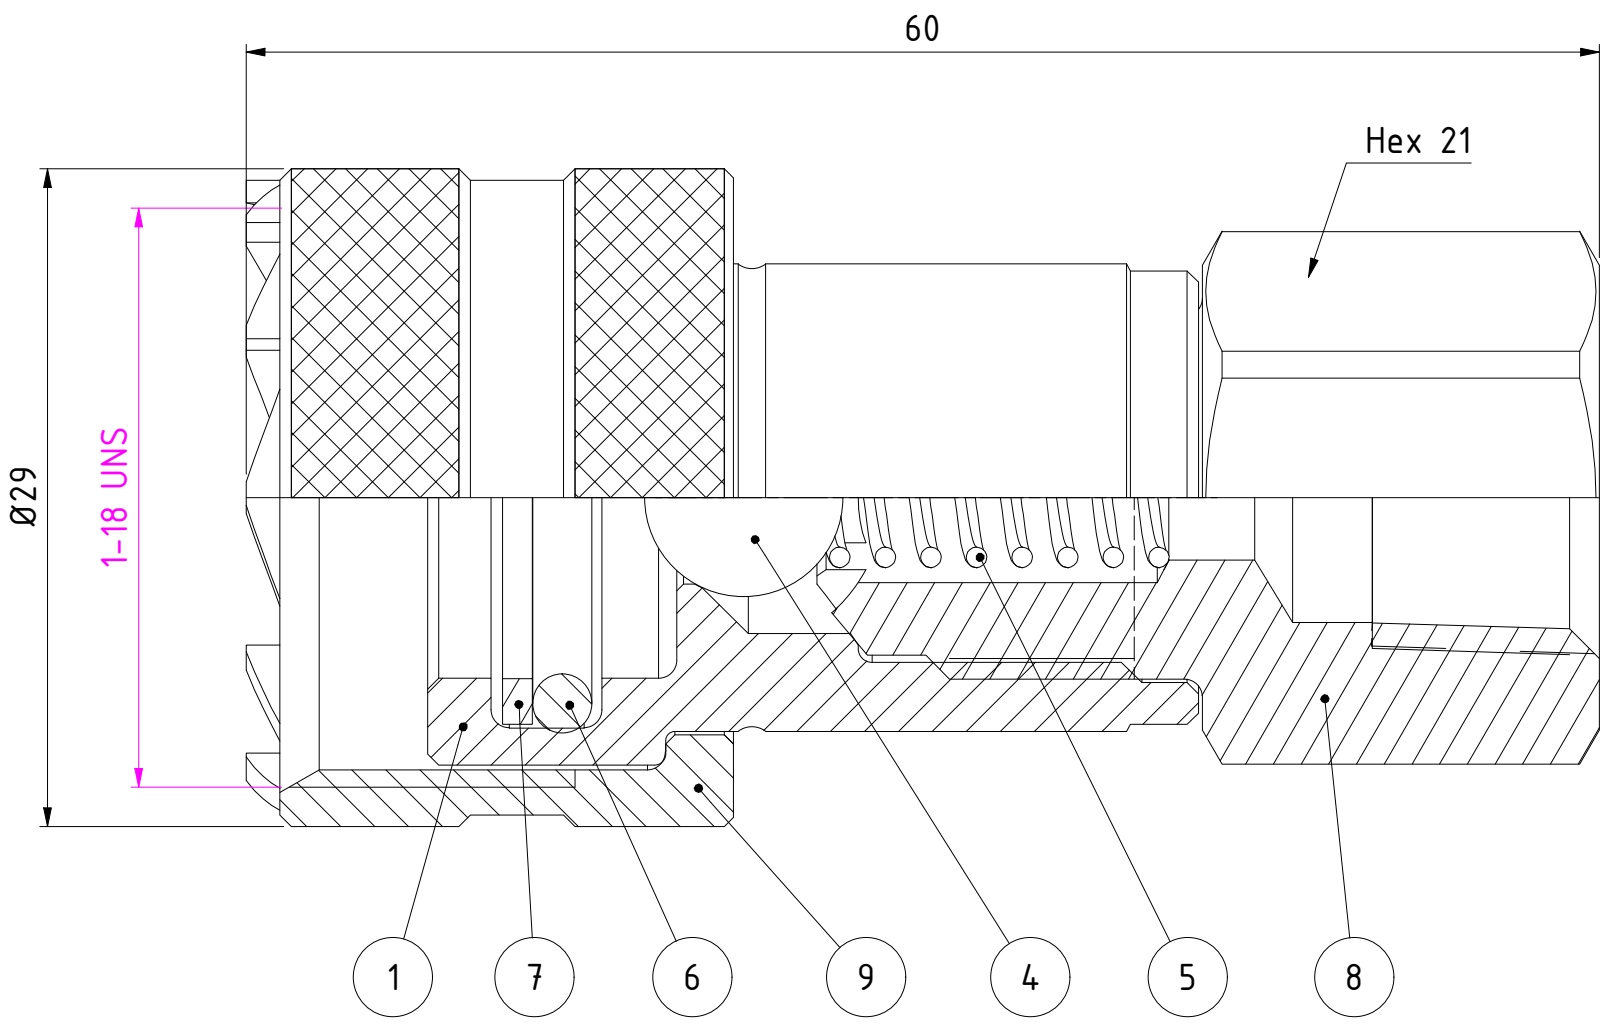

1 : 1

Compliant with ISO 14540

Product No.	102321442
Nominal flow Ø DN:	6,3 mm
Connection Stroke:	mm
Max WP Connected:	720 bar
Max WP Disconnected:	720 bar
Min BP Connected:	2160 bar
Min BP Disconnected:	1440 bar
Temperature range:	-30°C - +100°C
Connection:	1/4" NPT female
Sealing material:	NBR
Hexagon:	21

9	1	Locking sleeve	Steel, Zn 8 silver
8	1	Back part	Steel, Zn 8 silver
7	1	Back-up ring	Hytrel
6	1	O-ring	NBR
5	1	Spring	Steel
4	1	Ball	Chrome steel
1	1	Coupling body	Steel, Zn 8 silver
Item	Qty	Description	Material

Scale	3 : 1	Drawn	CABAO	Checked	FR	Appr.	JE	ECO	12232	Date	2018-09-30
Drawing No.										Issue	Sheet
Assembly Drawing 102321442										B	1 /(1)

