

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D


C

B

A

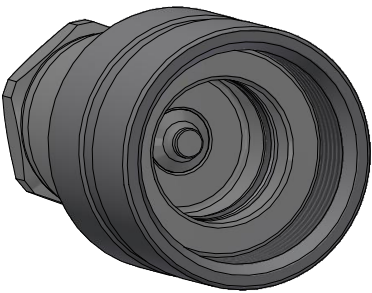

1 : 1

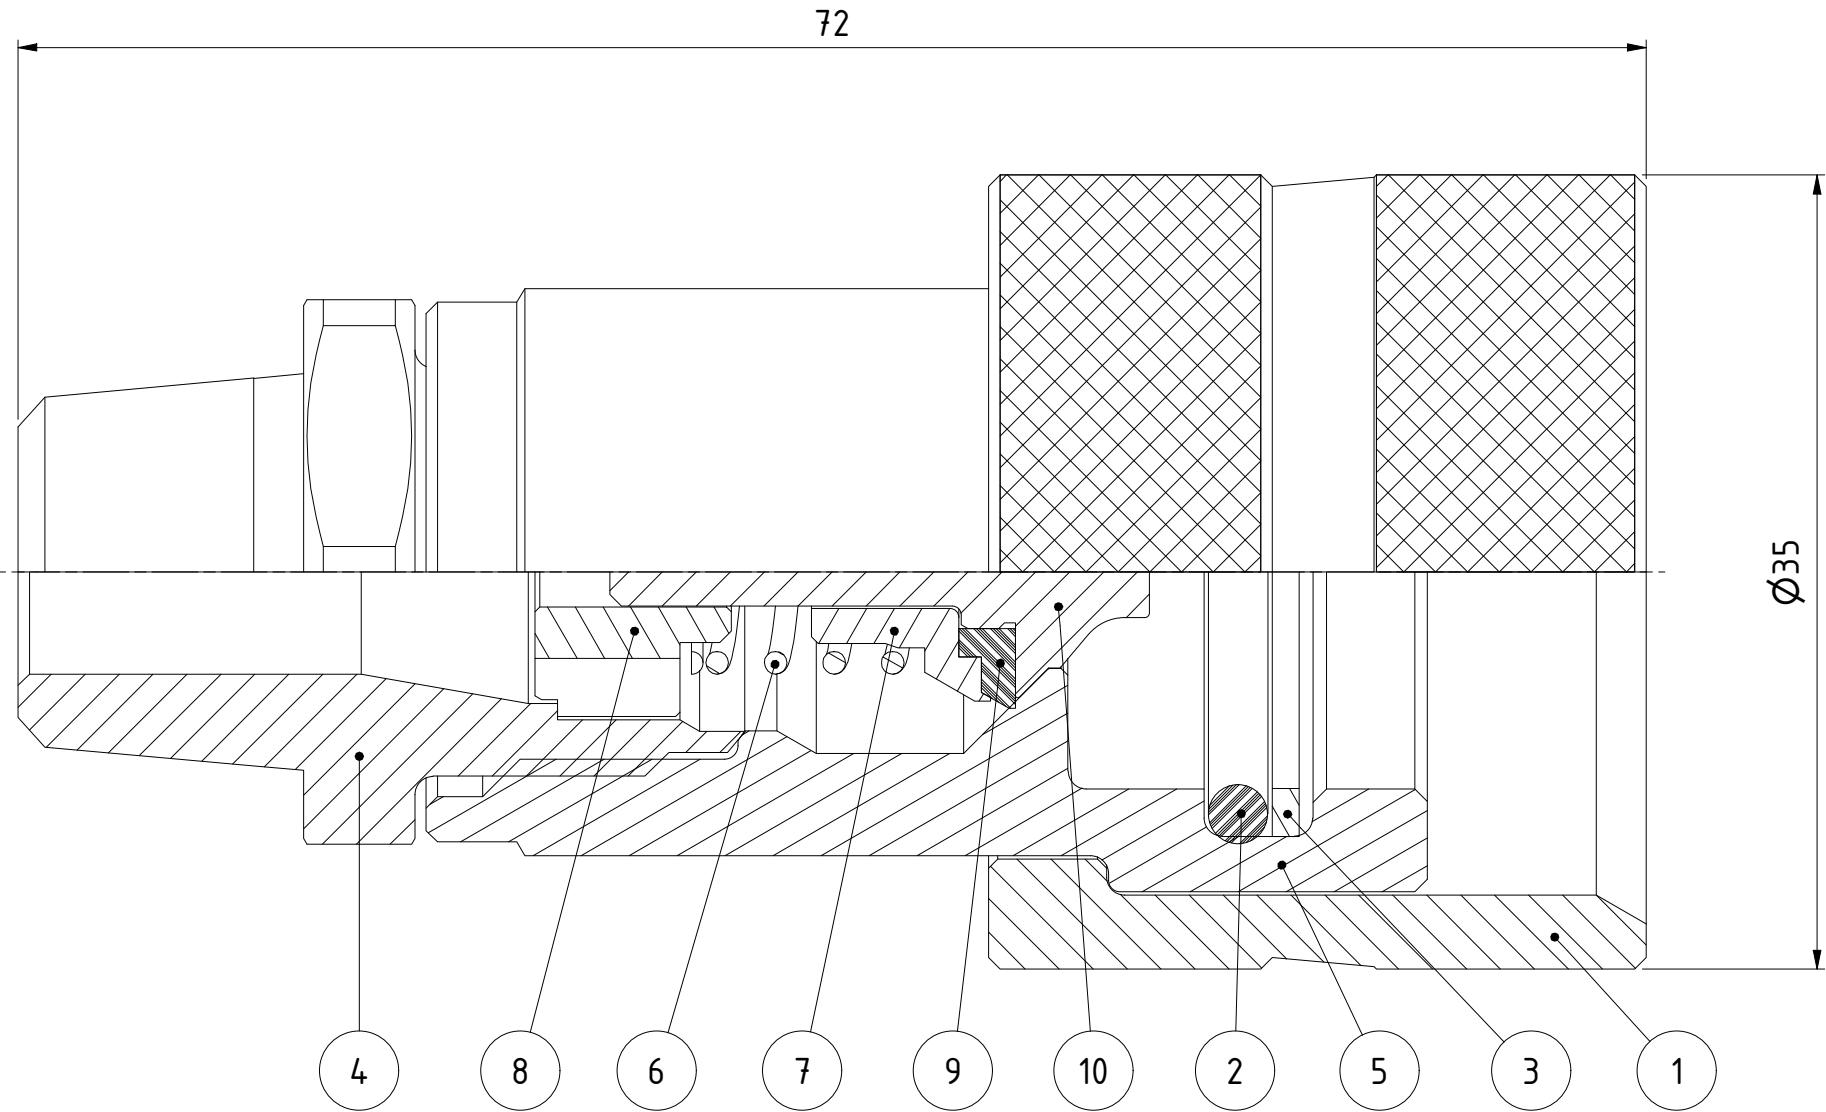

Compliant with ISO 14540

Product No. 102321494

Nominal flow  $\varnothing$  DN: 10 mm  
Connection Stroke: 16 mm  
Max WP Connected: 720 bar  
Max WP Disconnected: 720 bar  
Min BP Connected: 2160 bar  
Min BP Disconnected: 2160 bar  
Temperature range: -30°C - +100°C  
Connection: 3/8" NPT Male  
Sealing material: NBR  
Hexagon: 24

|      |     |                |                    |
|------|-----|----------------|--------------------|
| 10   | 1   | Valve          | Steel, Zn 8 silver |
| 9    | 1   | Sealing        | PUR                |
| 8    | 1   | Stop for valve | Brass              |
| 7    | 1   | Valve seat     | Steel, Zn 8 silver |
| 6    | 1   | Spring         | Stainless steel    |
| 5    | 1   | Coupling Body  | Steel, Zn 8 silver |
| 4    | 1   | Back Part      | Steel, Zn 8 silver |
| 3    | 1   | Back-up ring   | PTFE               |
| 2    | 1   | O-ring         | NBR                |
| 1    | 1   | Locking Sleeve | Steel, Zn 8 silver |
| Item | Qty | Description    | Material           |

|  |                  |       |           |       |             |    |       |    |       |        |      |            |
|--|------------------|-------|-----------|-------|-------------|----|-------|----|-------|--------|------|------------|
|  | Scale            | 3 : 1 | Drawn     | CABAO | Checked     | FR | Appr. | JE | ECO   | 000926 | Date | 2021-05-09 |
|  | Assembly Drawing |       | 102321494 |       | Drawing No. |    | Issue |    | Sheet |        | B    | 1 /(1 )    |