

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B



A

D

C

B

A

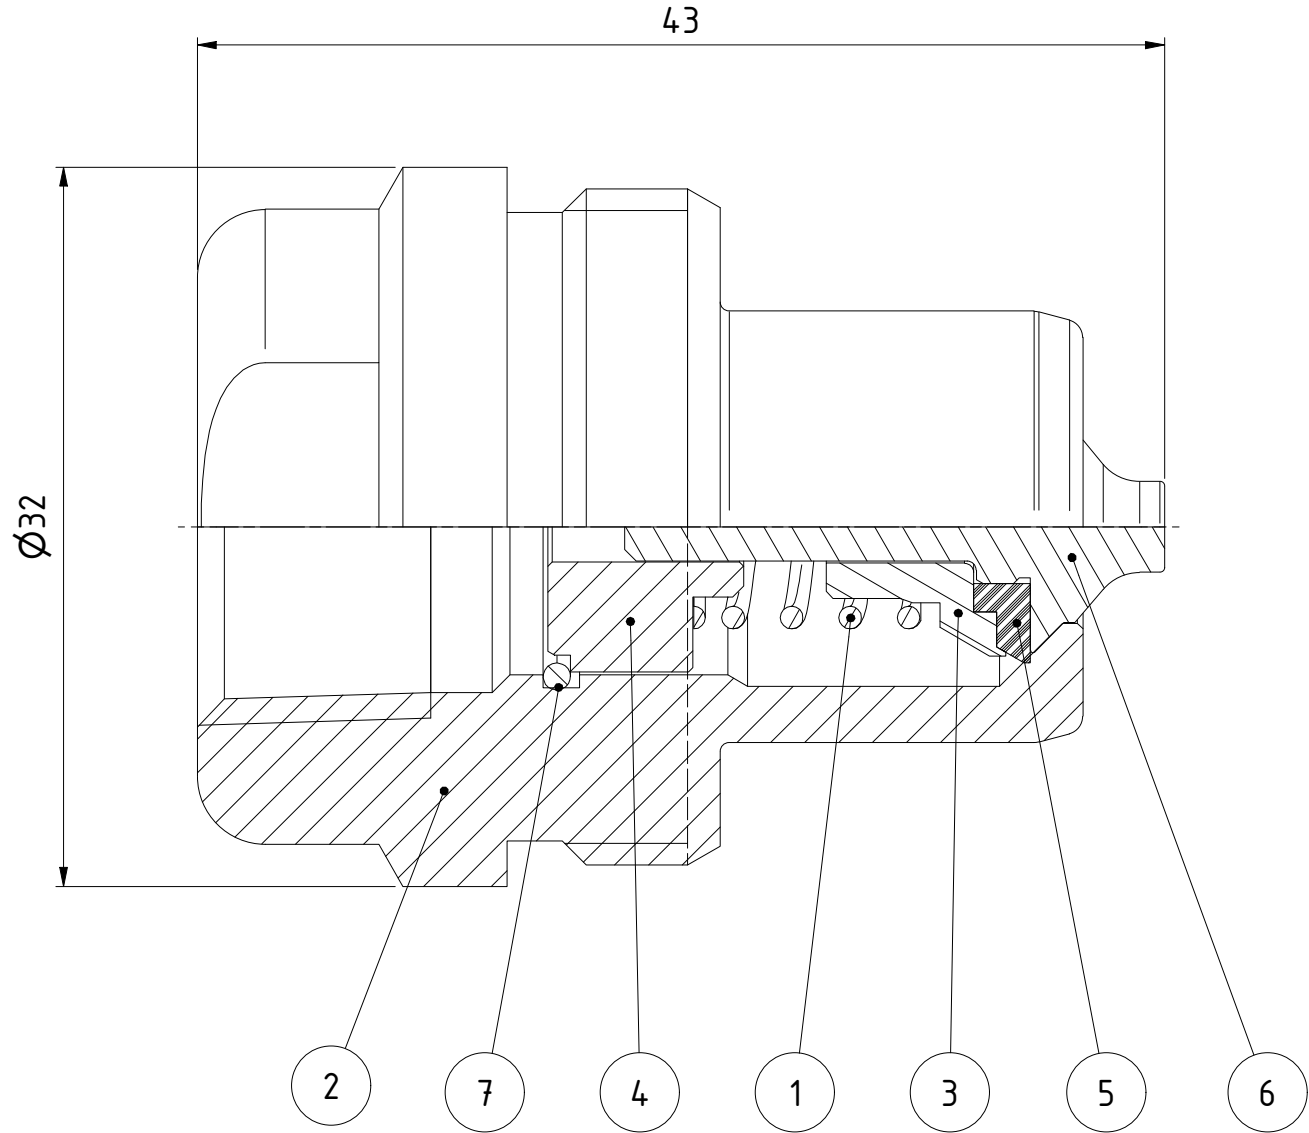

Compliant with ISO 14540

Product No. 102326444

Nominal flow $\varnothing$ DN: 10 mm
Connection Stroke: - mm
Max WP Connected: 720 bar
Max WP Disconnected: 720 bar
Min BP Connected: 2160 bar
Min BP Disconnected: 2160 bar
Temperature range: -30°C - +100°C
Connection: 3/8" NPT female
Sealing material: NBR
Hexagon: 24

7	1	Wire coil	Steel	
6	1	Valve	Steel, Zn 8 silver	
5	1	Sealing	PUR	
4	1	Stop for valve	Brass	
3	1	Valve seat	Steel, Zn 8 silver	
2	1	Nipple body	Steel, Zn 8 silver	
1	1	Spring	Stainless steel	
Item	Qty	Description	Material	
		Scale 3 : 1	Drawn CABNiHa	Checked FR
		Appr. MRo	ECO	Date 2023-06-20
Assembly Drawing 102326444				Issue B
				Sheet 1 /(1)