

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B



A

D

C

B

A

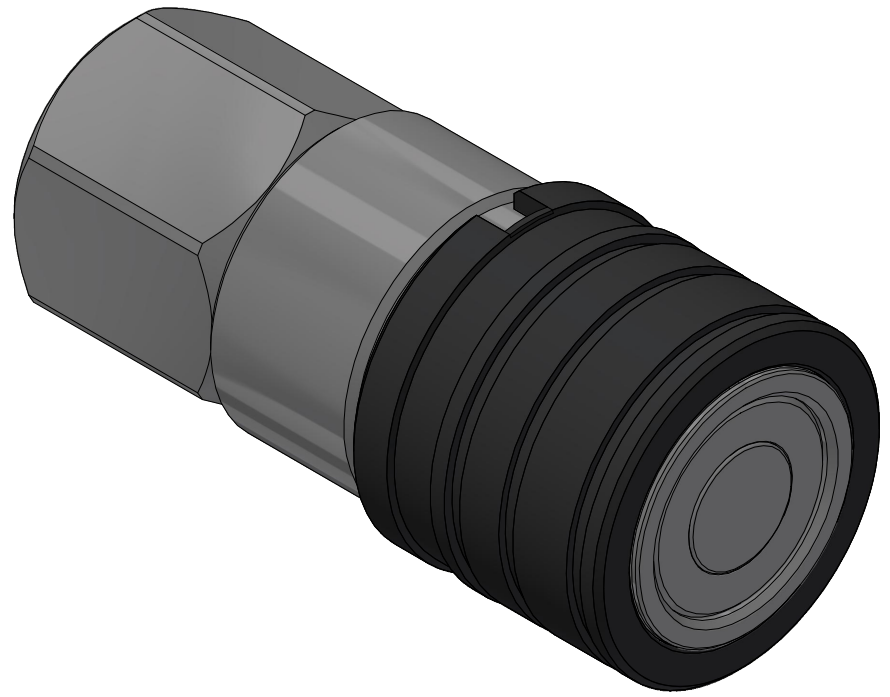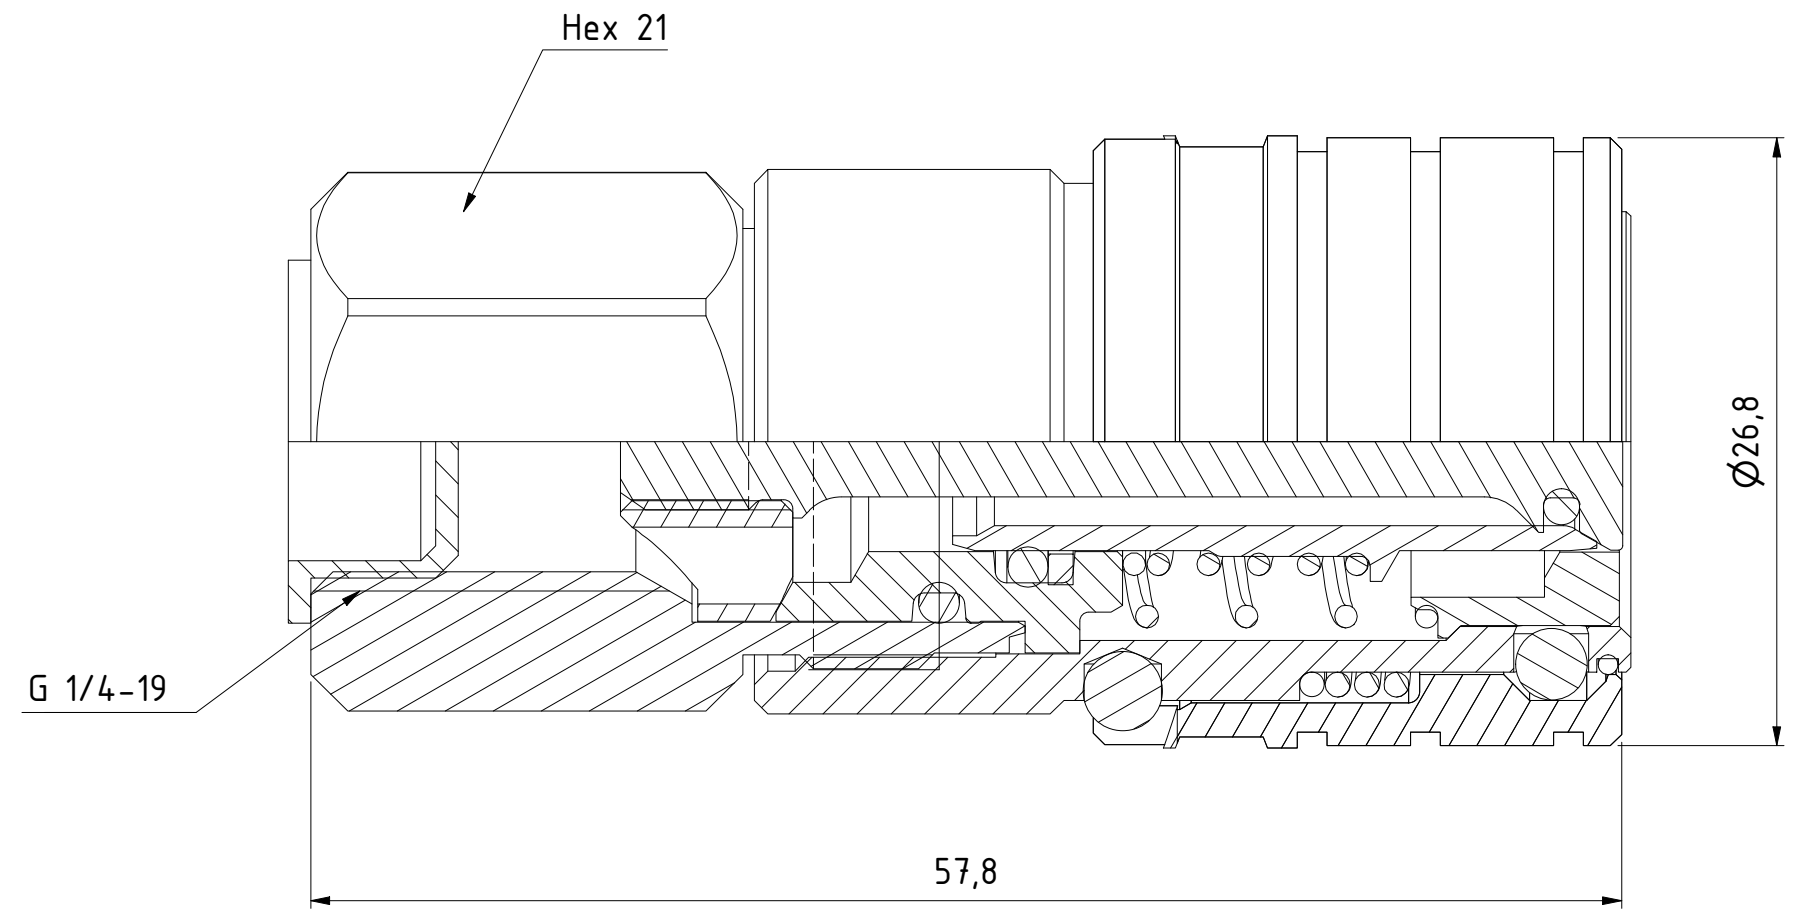

Product No. 102651212	
Nominal flow Ø DN:	6.3 mm
Connection Stroke:	10.8 mm
Max WP Connected:	500 bar
Max WP Disconnected:	500 bar
Min BP Connected:	1260 bar
Min BP Disconnected:	1260 bar
Temperature range:	-20°C - 205°C
Connection:	G 1/4", Fem
Sealing material:	FPM
Hexagon:	21

6	1	Back Part	Steel, Plated	092657322
5	1	Spring	Stainless steel	092653201
4	1	Semi Assembly Valve FPM		092659007
3	1	Semi Assembly Front		092659004
2	1	Thread protection	Plastic	099501361
1	1	Ratchet Sleeve	Steel, Plated	092653520
Item	Qty	Description	Material	Part Number
State		Drawn	Checked	Approved
Production		CABPEOD		
		Date		2018-03-26
		ECO	Former No.	Scale
				3 : 1
		Drawing No.	Issue	Sheet
		102651212	A	1 /(1)



Coupling G 1/4" fem FPM