


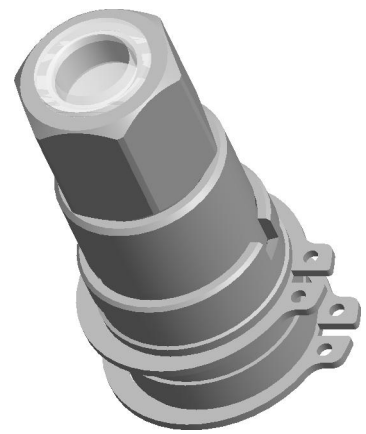


Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden. Alle Rechte vorbehalten.

Denna handling får ej utan vårt medgivande delges annan. Kopieras eller eljest obehörigen användas. Överlåtelse härvid beivras med stöd av gällande lag. This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences.

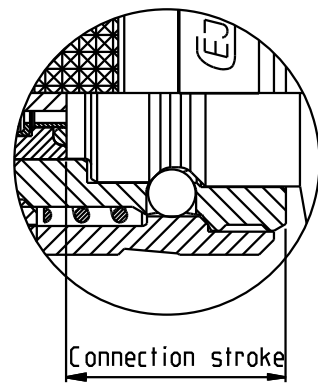

A3

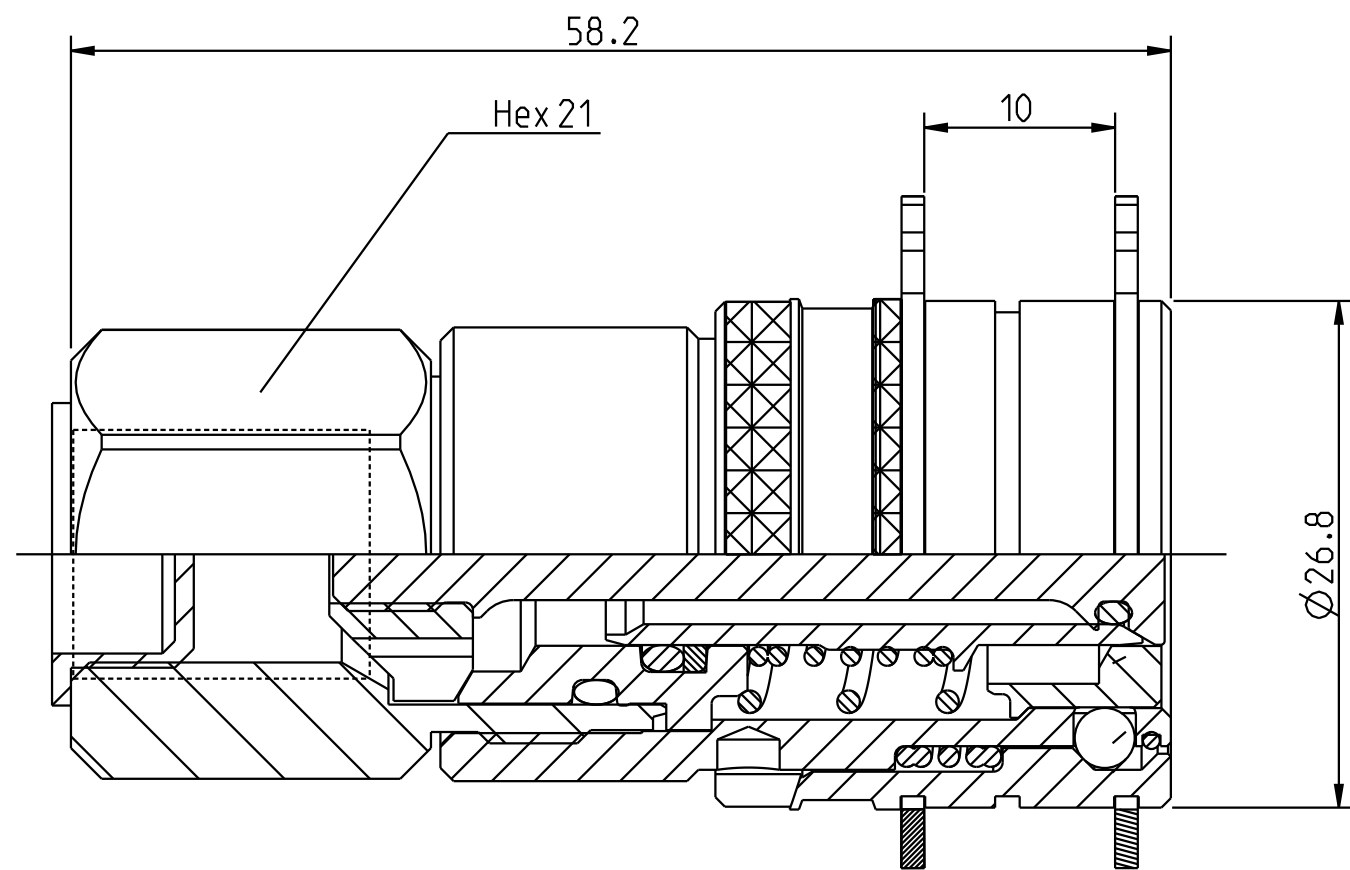

1:1

19	1	Wire coil	Stainless steel
18	1	Valve stop	Steel, Fe/Zn 8 P1
17	1	Valve sleeve	Steel, FeNi5b
16	1	Valve seat	Steel, Fe/Zn 8 P1
15	1	Valve opener	Steel, Fe/Zn 5 P1
14	1	Thread protection	Plastic
13	1	Spring	Stainless steel
12	1	Spring	Stainless steel
11	1	Spring	Stainless steel
10	1	Ratchet sleeve	Steel, Fe/Zn 8 P1
9	1	O-ring	NBR
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	Locking sleeve	Steel, Corr-I-Dur
5	2	Lock ring	Steel
4	1	Front part	Steel, Fe/Zn 8 P1
3	12	Ball	Stainless steel
2	1	Backup ring	Hytrel
1	1	Back part	Steel, Fe/Zn 8 P1
Detalj Item	Antal Quant.	Benämning Description	Material Material

Product no: 10_265_1282			
Max working pressure:	500	bar	connected
	500	bar	disconnected
Min burst pressure:	1500	bar	connected
	1500	bar	disconnected
Sealing material:	NBR		
Temperatur range:	-30°C - 100 °C		
Nominal flow diameter,DN:	6.3	mm	
Connection	G 1/4'' Fem		
Connection stroke:	10.8	mm	

	Skala Scale	5:2	Ritad Drawn	HS	Kontr. Checked	-	Godk. Appr.	-	M nr. Alt. no.	-	Dat. Date	101220
	Assembly drawing		Ritning nr/Drawing No.				50_265_1282		Utg./Issue			AA