
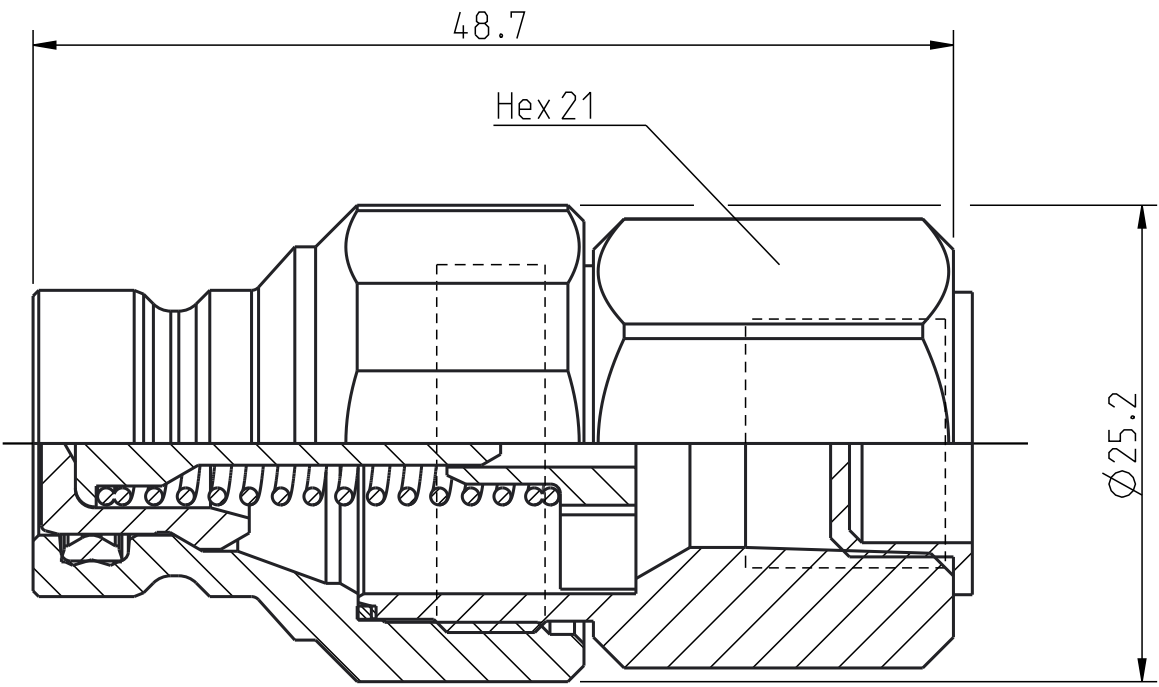


Dessa r  tigheter f  rbeh  lls.
All rights reserved.
Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdr  ckliche Genehmigung kopiert oder auf andere Weise verv  ltlicht werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Denna handling f  r ej utan v  t medgivande delges annan. Kopieras eller eljest obeh  rigen anv  ndas.
  vertr  delse h  rvid beivras med st  d av g  llande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.



Product no: 10_265_6102		
Max working pressure:	500	bar connected
	500	bar disconnected
Min burst pressure:	1500	bar connected
	1500	bar disconnected
Sealing material:	NBR/PUR	
Temperatur range:	-30�C - +100 �C	
Nominal flow diameter,DN:	6,3	mm
Connection	1/4" BSPT Fem	
Connection stroke:	mm	

9	1	Valve stop	Brass
8	1	Valve	Steel, Zi-Ni 9 T
7	1	Thread protection	Plastic
6	1	Spring	Stainless steel
5	1	Profile sealing	PUR
4	1	Pin	Steel
3	1	Nipple body	Steel, Zn-Ni 9 transp
2	1	Flat seal	POM
1	1	Back part	Steel, Zn-Ni 9 transp
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	5:2	Rit��d Drawn	JoEr	Kontr. Checked	-	Godk. Appr.	-	��m nr. Alt. no.	-	Dat. Date	131030
	Assembly drawing		Ritning nr/Drawing No.				50_265_6102		Utg./Issue			AA