


Product no: 10_265_6212			
Max working pressure:	315	bar	connected
	315	bar	disconnected
Min burst pressure:	1260	bar	connected
	1260	bar	disconnected
Sealing material:	FPM		
Temperatur range:	-20��C - 205 ��C		
Nominal flow diameter,DN:	6.3	mm	
Connection	1/4'' G Fem		
Connection stroke:	10.8	mm	

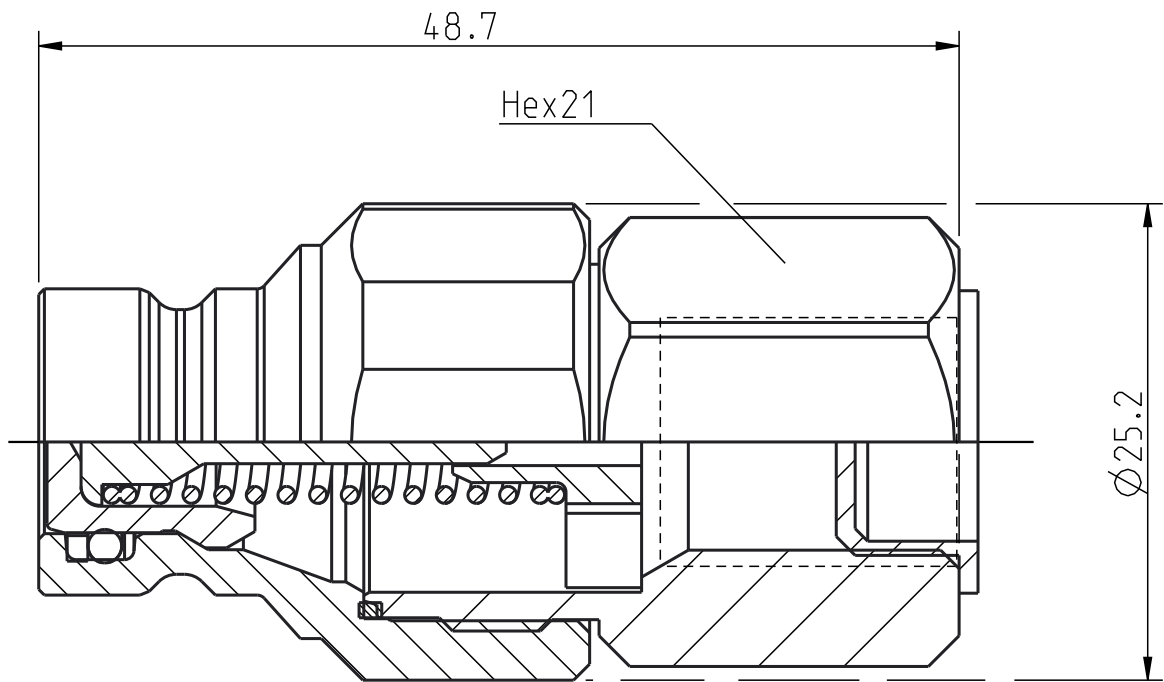

10	1	Valve stop	Brass
9	1	Valve	Steel, FeNi5b
8	1	Thread protection	Plastic
7	1	Spring	Stainless steel
6	1	Pin	Steel
5	1	O-ring	FPM
4	1	Nipple body	Steel, Fe/Zn 8 P1 N
3	1	Flat seal	POM
2	1	Backup ring	PTFE
1	1	Back part	Steel, Zn-Ni 9 transp
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	5:2	Ritad Drawn	CEJN	Kontr. Checked	–	Godk. Appr.	–	ÄM nr. Alt. no.	–	Dat. Date	12-11-20
	Assembly drawing							Ritning nr./Drawing No.		Utg./Issue		
							50_265_6212		AA			