


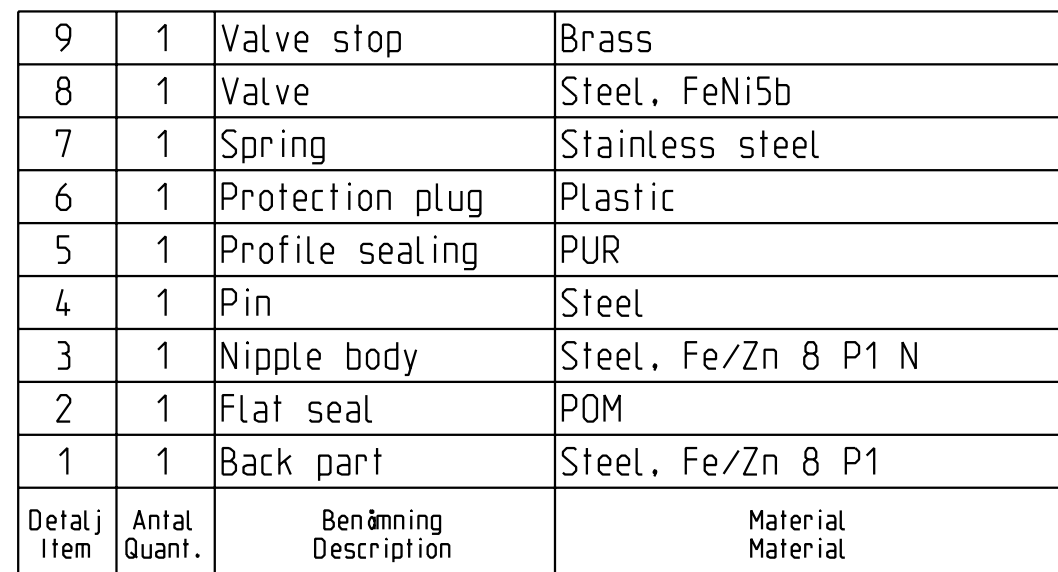

Product no: 10_265_6602		
Max working pressure, static:	500	bar
Max working pressure, dynamic:	315	bar
Min burst pressure:	1500	bar connected
	1500	bar disconnected
Sealing material:	NBR/PUR	
Temperatur range:	-30°C - +100 °C	
Nominal flow diameter,DN:	6,3	mm
Connection	7/16"-20 ORB	
Connection stroke:	-	mm

	Skala Scale	5:2	Ritad Drawn	MLi	Kontr. Checked	ChP	Godd. Appr.	MAh	AM nr. Alt. no.	8299	Dat. Date	100817
	Assembly drawing						Ritning nr/Drawing No.			50_265_6602		Utg./Issue