



Product no: 10_267_1220		
Max working pressure:	20	bar connected
	20	bar disconnected
Min burst pressure:	80	bar connected
	80	bar disconnected
Sealing material:	EPDM	
Temperatur range:	-20°C - +150 °C	
Nominal flow diameter,DN:	4	mm
Connection	G 1/4" Female	
Connection stroke:	15.8	mm

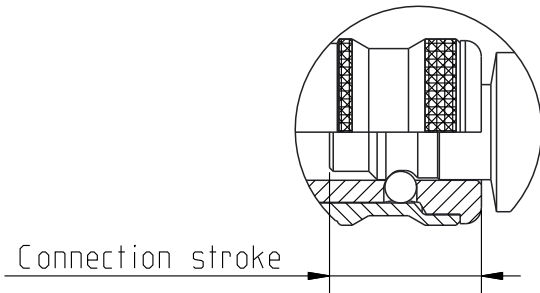

14	1	Wire coil	Acid-proof steel
13	1	Wire coil	Acid-proof steel
12	1	Valve sleeve	Brass, Plated
11	1	Valve pin	Brass, Ni5
10	1	Stop for valve	Brass
9	1	Stop flange	Brass, Ni8
8	1	Spring	Acid-proof steel
7	1	Spring	Acid-proof steel
6	1	O-ring	EPDM
5	1	O-ring	EPDM
4	1	Locking sleeve	Brass Ni5b
3	1	Coupling body	Brass, Ni5
2	1	Checking ring	Plastic, green
1	6	Ball	Stainless steel
Detalj Item	Antal Quant.	Benämning Description	Material

	Skala Scale	3:1	Ritad Drawn	JOJ	Kontr. Checked	-	Godk. Appr.	-	Äm nr. Alt. no.	-	Dat. Date	151228
	Assembly drawing		Ritning nr/Drawing No.				50_267_1220		Utg./Issue			AA

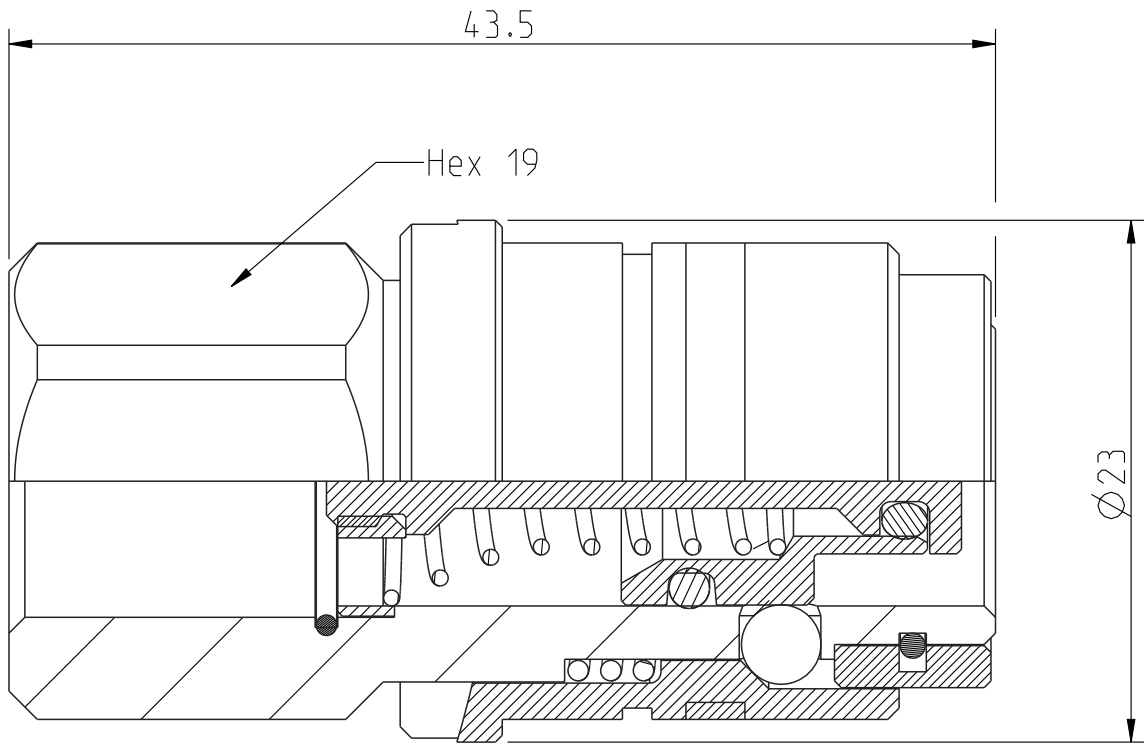

1:1