




Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältigt werden. Alle Rechte vorbehalten.

Denna handling för ej utan vårt medgivande delges annan. Kopieras eller eljest obehörigen användas. Överlåtelse härvid beivras med stöd av gällande lag. This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences.



A3

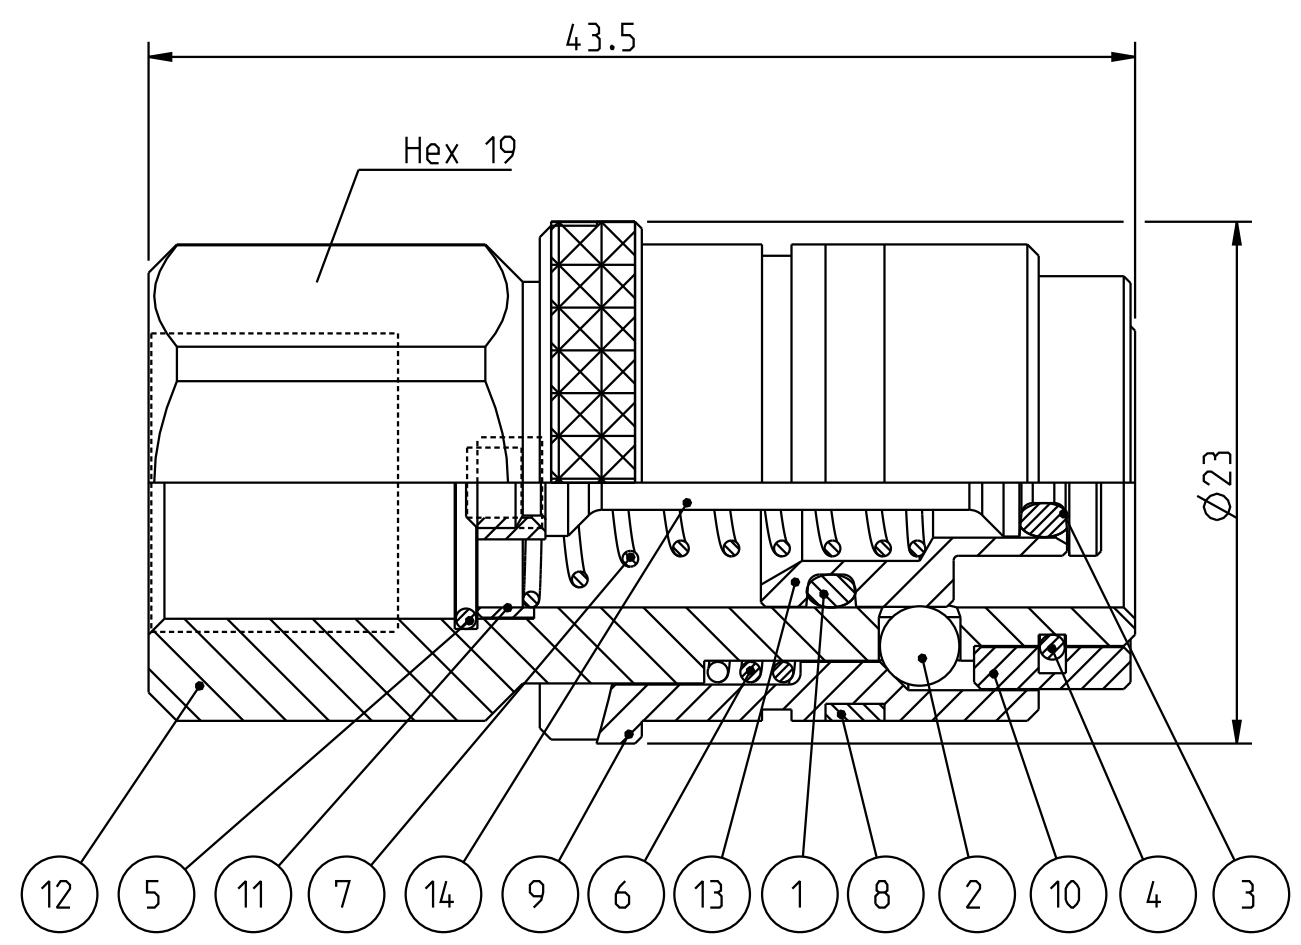

Connection stroke

Product no: 10_277_1210		
Max working pressure:	20	bar connected
	20	bar disconnected
Min burst pressure:	80	bar connected
	80	bar disconnected
Sealing material:	FPM	
Temperatur range:	-5 °C - +205 °C	
Nominal flow diameter, DN:	4	mm
Connection	G 1/4" female	
Connection stroke:	15.8	mm

14	1	Valve pin	Acid-proof steel
13	1	Valve sleeve	Acid-proof steel
12	1	Coupling body	Acid-proof steel
11	1	Stop for valve	Acid-proof steel
10	1	Stop flange	Acid-proof steel
9	1	Locking sleeve	Acid-proof steel
8	1	Checking ring	Plastic, green
7	1	Spring	Acid-proof steel
6	1	Spring	Acid-proof steel
5	1	Wire coil	Acid-proof steel
4	1	Wire coil	Acid-proof steel
3	1	O-ring	FPM
2	6	Ball	Acid-proof steel
1	1	O-ring	FPM
Detalj Item	Antal Quant.	Benämning Description	Material Material

	Skala Scale	3:1	Ritad Drawn	ChP	Kontroll. Checked	-	Godk. Appr.	-	Äm nr. Alt. no.	-	Dat. Date	110201
	Assembly drawing		Ritning nr/Drawing No.		50_277_1210		Utg./Issue		AB			