
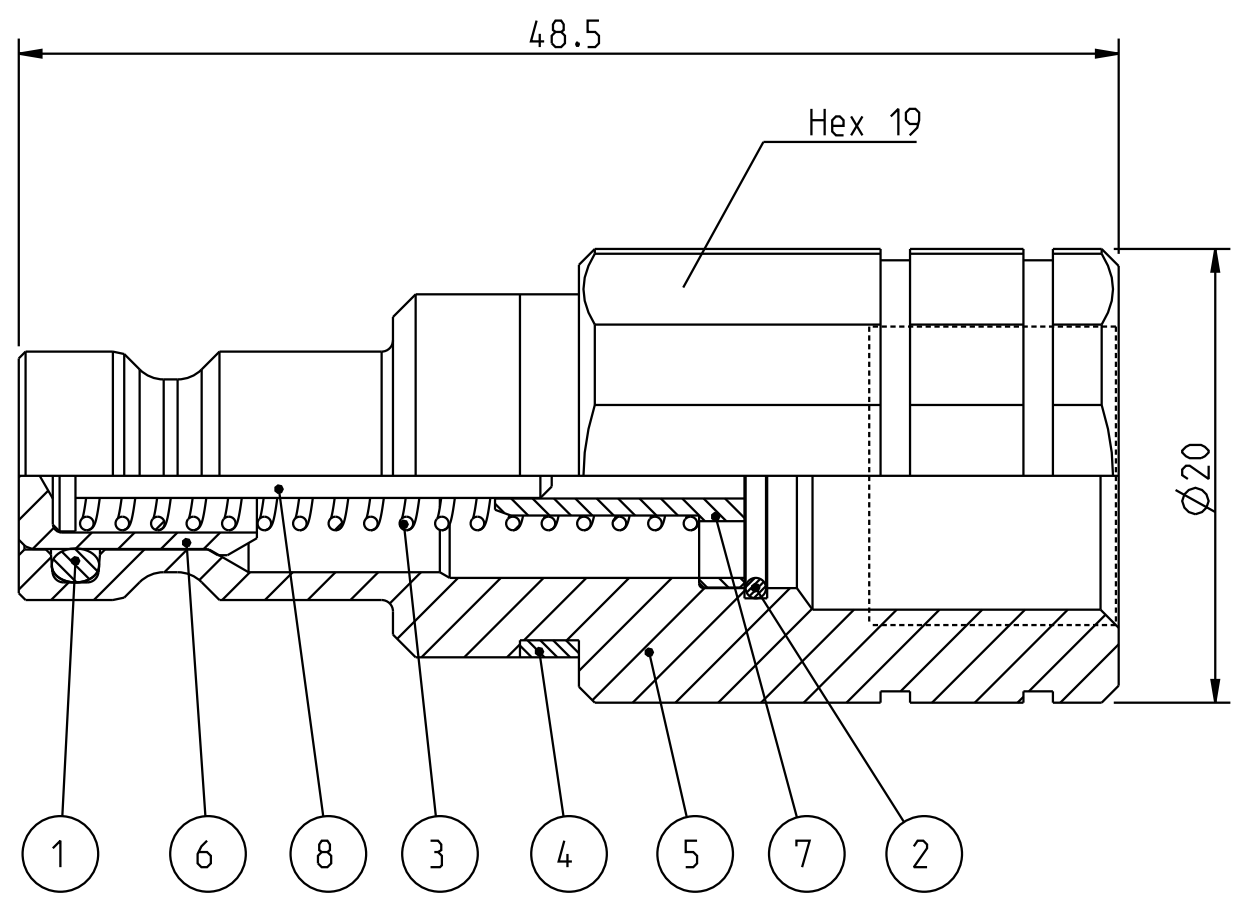


Dessa r  tigheter f  rbeh  lls.
All rights reserved.
Alle Rechte vorbehalten.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdr  ckliche Genehmigung kopiert oder auf andere Weise verv  ilt  tig werden.
werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Denna handling f  r ej utan v  t medgivande delges annan. kopieras eller eljest obeh  rigen anv  ndas.
  verr  ttelse h  rvid beivras med st  d av g  llande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.



Product no: 10_277_6210		
Max working pressure:	20	bar connected
	20	bar disconnected
Min burst pressure:	80	bar connected
	80	bar disconnected
Sealing material:	FPM	
Temperatur range:	-5 �C - +205 �C	
Nominal flow diameter,DN:	4	mm
Connection	G 1/4" female	
Connection stroke:	-	mm

8	1	Valve pin	Acid-proof steel
7	1	Stop for valve	Acid-proof steel
6	1	Valve	Acid-proof steel
5	1	Nipple body	Acid-proof steel
4	1	Checking ring	Plastic, green
3	1	Spring	Acid-proof steel
2	1	Wire coil	Acid-proof steel
1	1	O-ring	FPM
Detalj Item	Antal Quant.	Ben��mning Description	Material Material

	Skala Scale	3:1	Rit��d Drawn	ChP	Kontroll��r Checked	-	Godk��r Appr.	-	��r nr. Alt. no.	-	Dat. Date	110201
	Assembly drawing		Ritning nr/Drawing No.				50_277_6210		Utg./Issue			AB