

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

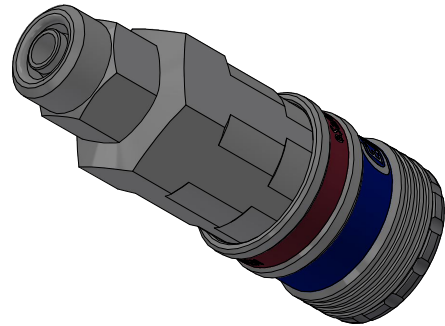


1 : 1


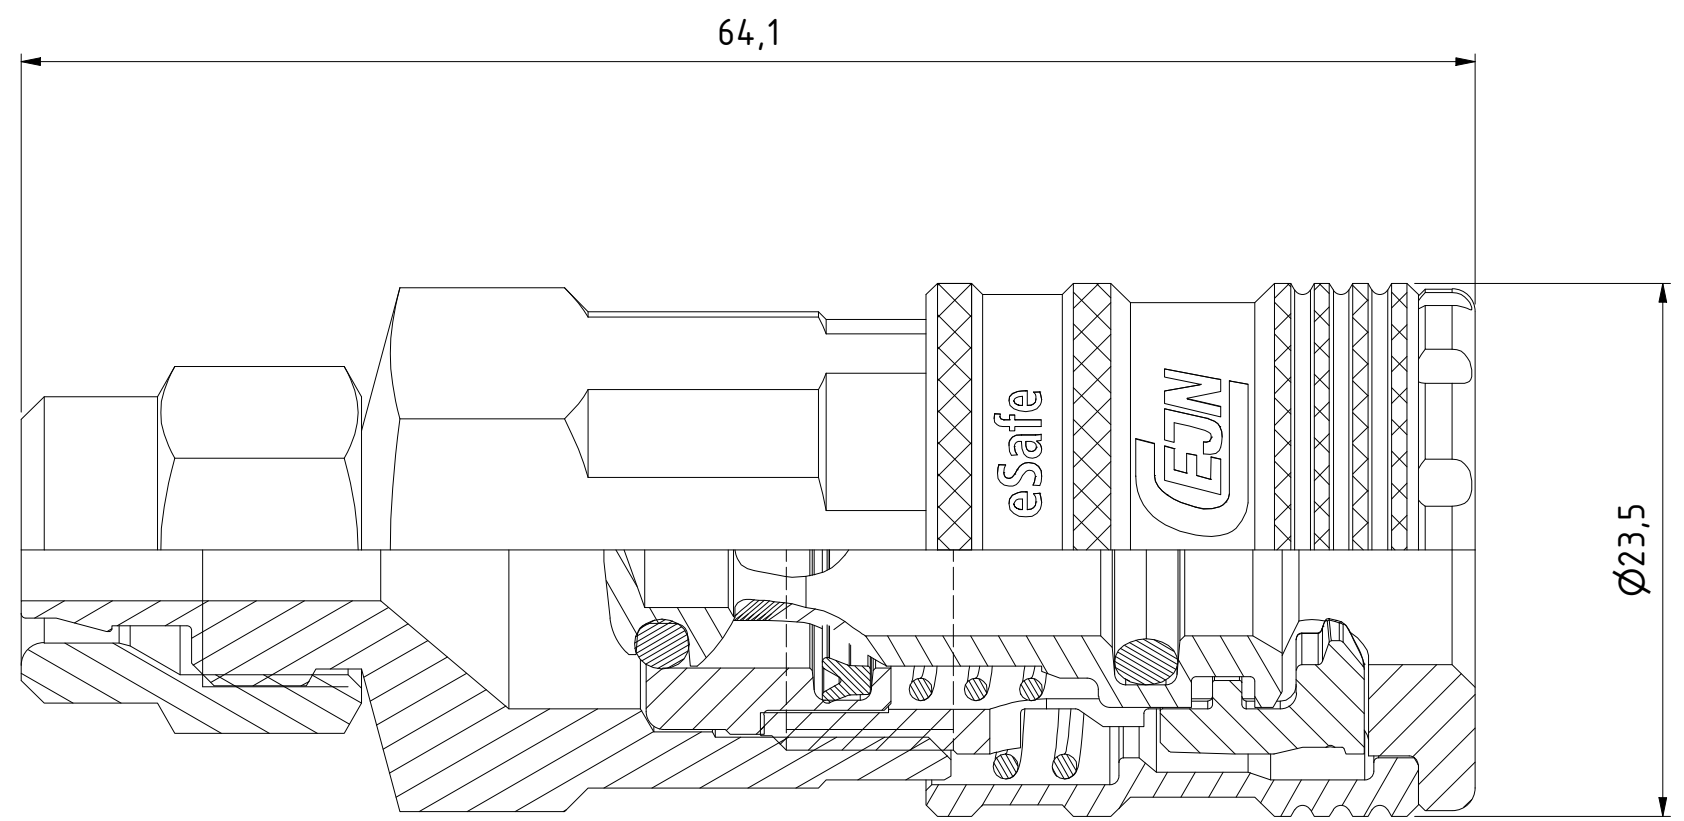


*WP/BP is valid with CEJN non-braided hose

Product No.	102912058
Nominal flow Ø DN:	4,5 mm
Connection Stroke:	21,3 mm
Max WP Connected:	10 bar *
Min BP Connected:	25 bar *
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 5x8
Sealing material:	NBR
Hexagon:	14/20

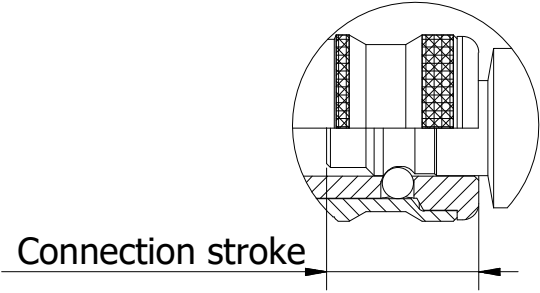

Connection stroke



12	1	Swivel nut	Steel, Zn 8 Silver
11	1	Back part	Steel, Zn 8 Silver
10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	Lip seal	NBR
7	1	Valve seat	Aluminium Lead Free
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Valve	Aluminium Lead Free
3	1	Locking sleeve	Hard. steel, Zn 8 Silver
2	2	Hook	Hard. Steel, Zn-Ni 8 transp.
1	1	Front part	Hard. Steel, Zn-Ni 10 black

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
ECO		Approved	Date
002136		OSJO	2025-01-14
Former No.		Scale	
		3 : 1	
Drawing No.		Issue	Sheet
102912058		C	1 /(1)

