

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D


C

B


A

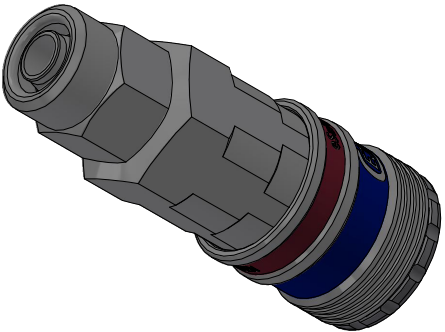

1 : 1

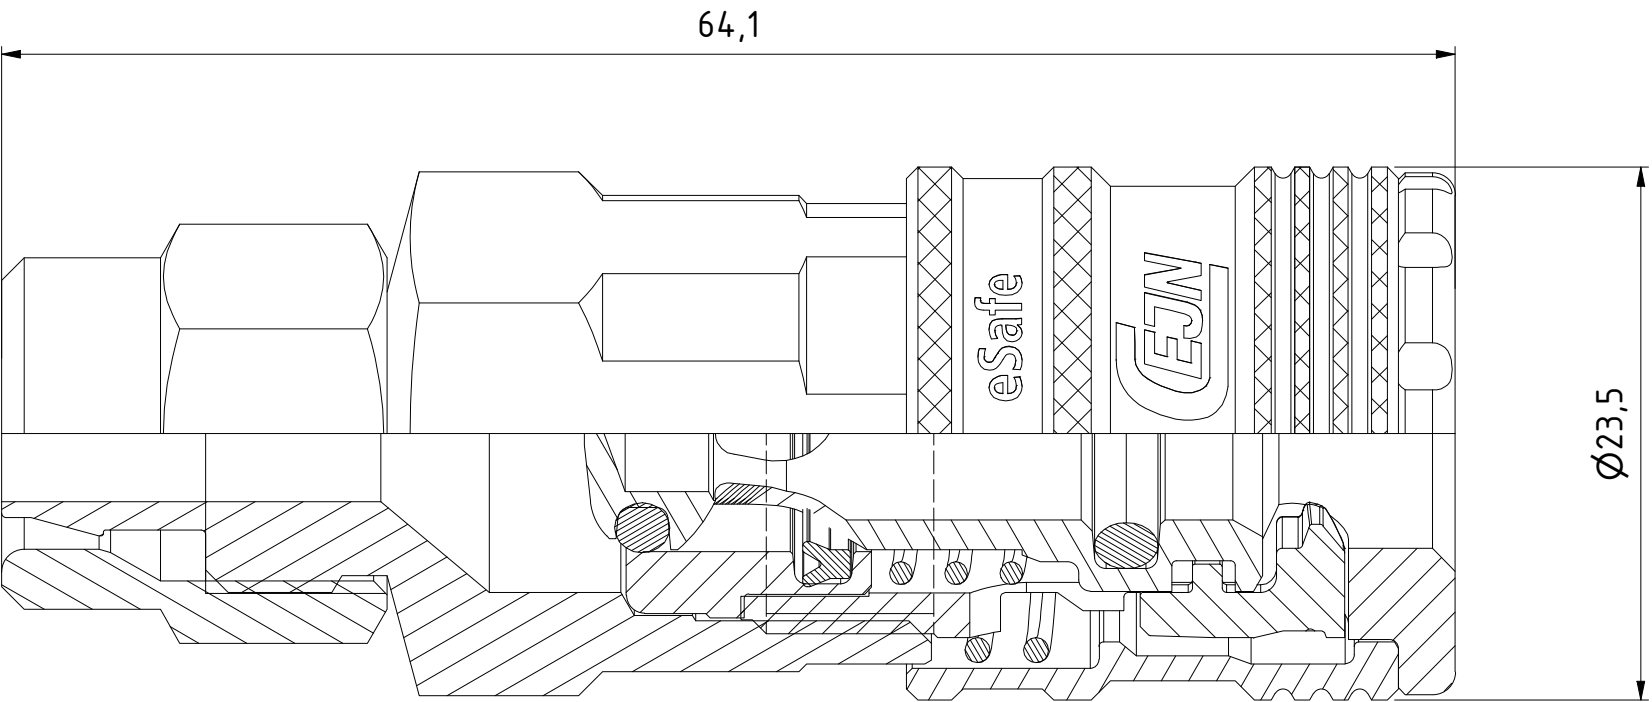

|                    |                    |
|--------------------|--------------------|
| Product No.        | 102912060          |
| Nominal flow Ø DN: | 5,5 mm             |
| Connection Stroke: | 21,3 mm            |
| Max WP Connected:  | 12 bar             |
| Min BP Connected:  | 48 bar             |
| Temperature range: | -20°C - +100°C     |
| Connection:        | Stream-Line 6,5x10 |
| Sealing material:  | NBR                |
| Hexagon:           | 16/20              |

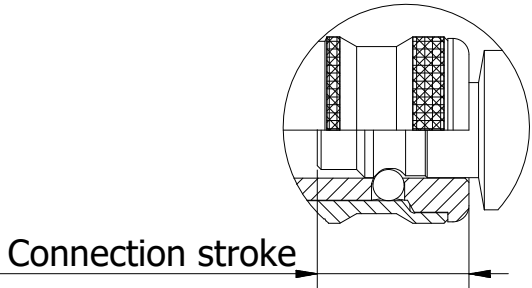

Connection stroke

|    |   |                |                              |
|----|---|----------------|------------------------------|
| 12 | 1 | Swivel nut     | Steel, Zn 8 Silver           |
| 11 | 1 | Back part      | Steel, Zn 8 Silver           |
| 10 | 1 | Spring         | Stainless steel              |
| 9  | 1 | Spring         | Stainless steel              |
| 8  | 1 | Lip seal       | NBR                          |
| 7  | 1 | Valve seat     | Aluminium Lead Free          |
| 6  | 1 | O-ring         | NBR                          |
| 5  | 1 | O-ring         | NBR                          |
| 4  | 1 | Valve          | Aluminium Lead Free          |
| 3  | 1 | Locking sleeve | Hard. steel, Zn 8 Silver     |
| 2  | 2 | Hook           | Hard. Steel, Zn-Ni 8 transp. |
| 1  | 1 | Front part     | Hard. Steel, Zn-Ni 10 black  |

| Item        | Qty | Description | Material   |
|-------------|-----|-------------|------------|
| State       |     | Drawn       | Checked    |
| Production  |     | CABLIJA     | ALAL       |
| ECO         |     | Approved    | Date       |
| 002136      |     | OSJO        | 2025-01-13 |
| Former No.  |     | Scale       |            |
|             |     | 3 : 1       |            |
| Drawing No. |     | Issue       | Sheet      |
| 102912060   |     | C           | 1 /(1 )    |



Coupling Stream-Line 6.5 x  
10 mm NBR - eSafe