

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B




A

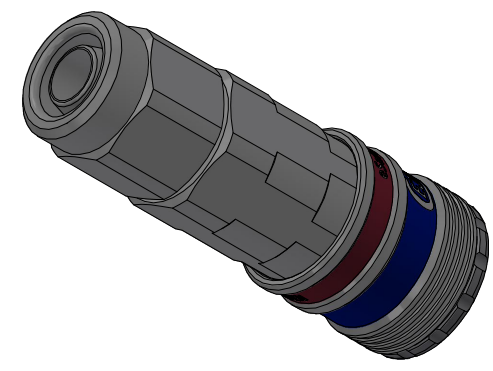

1 : 1

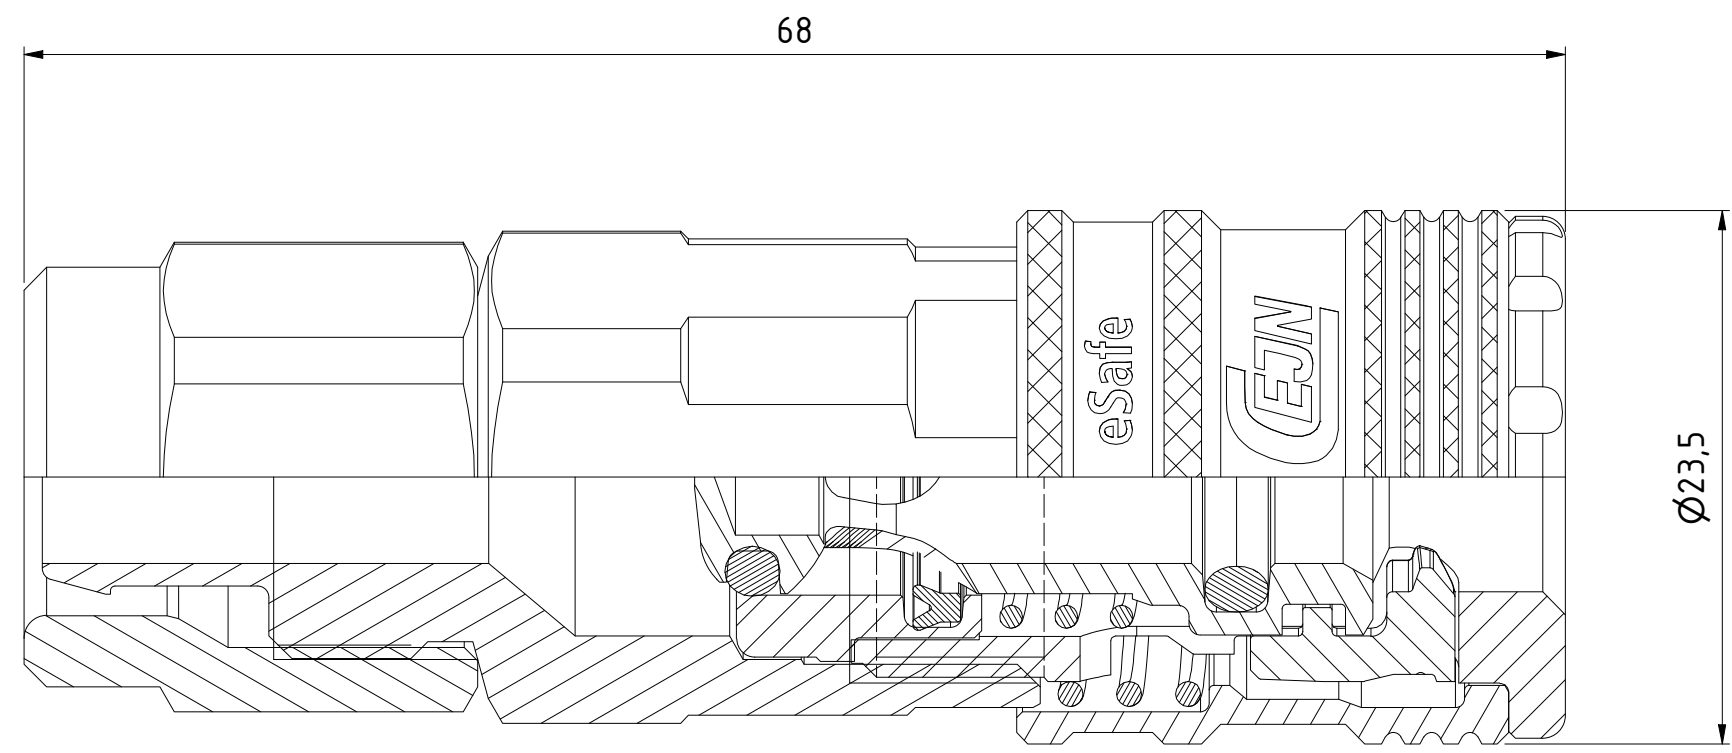

Product No. 102912062	
Nominal flow Ø DN:	5,5 mm
Connection Stroke:	21,3 mm
Max WP Connected:	12 bar
Min BP Connected:	48 bar
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 8x12
Sealing material:	NBR
Hexagon:	20 (2x)

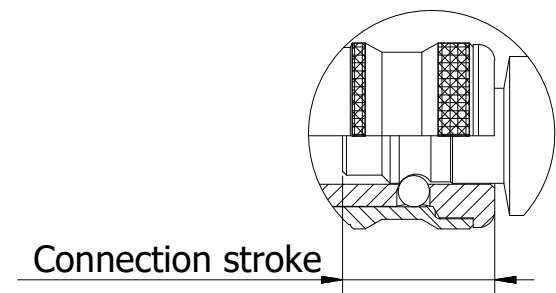

12	1	Swivel nut 8x12	Steel, Zn 8 Silver
11	1	Back part 8x12	Steel, Zn 8 Silver
10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	Lip seal	NBR
7	1	Valve seat	Aluminium Lead Free
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Valve	Aluminium Lead Free
3	1	Locking sleeve	Hard. steel, Zn 8 Silver
2	2	Hook	Hard. Steel, Zn-Ni 8 transp.
1	1	Front part	Hard. Steel, Zn-Ni 10 black

Item	Qty	Description		Material		
State Production		Drawn CABLIJA	Checked ALAL	Approved OSJO	Date 2025-01-13	
	Coupling Stream-Line 8 x 12 mm NBR - eSafe		ECO 002136	Former No.		Scale 3 : 1
			Drawing No. 102912062		Issue C	Sheet 1 /(1)