

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C


B

D




C

B

A

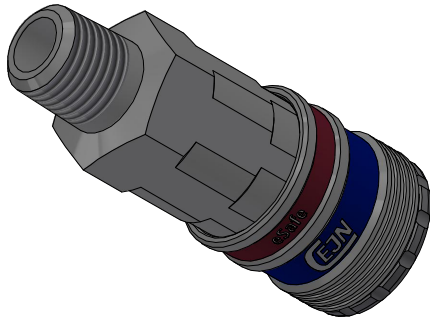

1 : 1

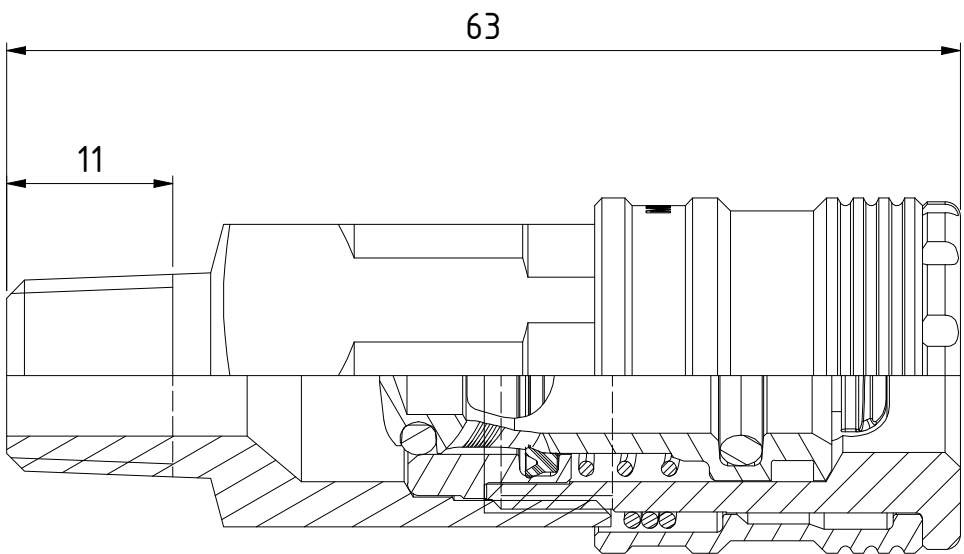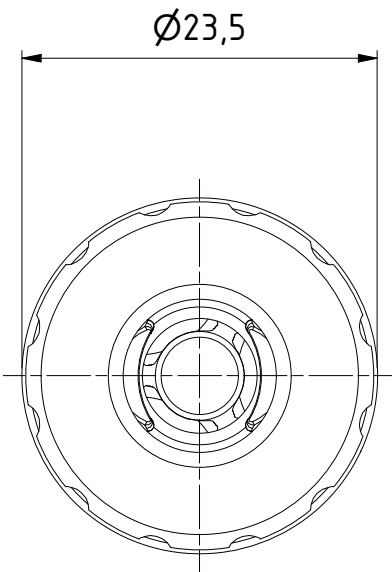

Connection stroke



11	1	Back part	Steel, Zn 8 silver
10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	Lip seal	NBR
7	1	Valve seat	Aluminium Lead Free
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Valve	Aluminium Lead Free
3	1	Locking sleeve	Hard. steel, Zn 8 Silver
2	2	Hook	Hard. Steel, Zn-Ni 8 transp.
1	1	Front part	Hard. Steel, Zn-Ni 10 black

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
ECO		Approved	Date
002136		OSJO	2025-01-14
Former No.		Scale	
		2 : 1	
Drawing No.		Issue	Sheet
102912152		B	1 /(1)



Coupling R 1/4" male NBR -
eSafe

Product No. 102912152

Nominal flow Ø DN: 5.5 mm
Connection Stroke: 21.3 mm
Max WP Connected: 12 bar
Min BP Connected: 48 bar
Temperature range: -20°C - +100°C
Connection: R 1/4" Male
Sealing material: NBR
Hexagon: 20