

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©






D

C

B

A

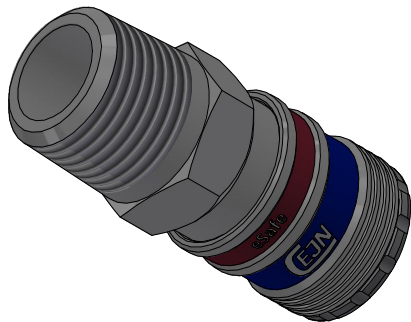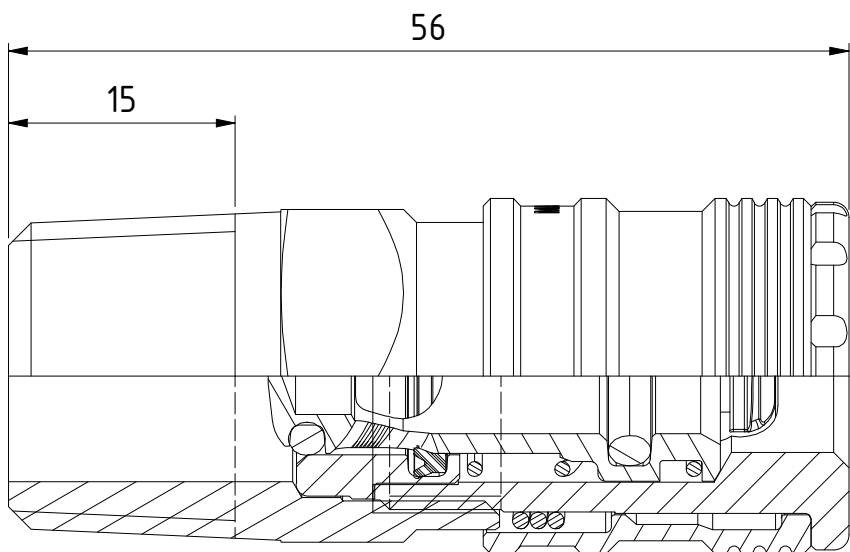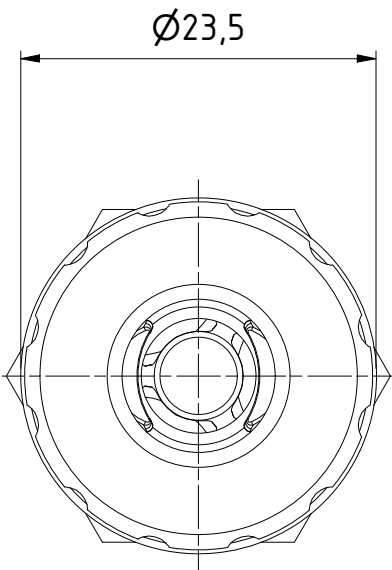

1 : 1


D

C

B

A

Product No. 102912155	
Nominal flow Ø DN:	5.5 mm
Connection Stroke:	21.3 mm
Max WP Connected:	12 bar
Min BP Connected:	48 bar
Temperature range:	-20°C - +100°C
Connection:	R 1/2" Male
Sealing material:	NBR
Hexagon:	22

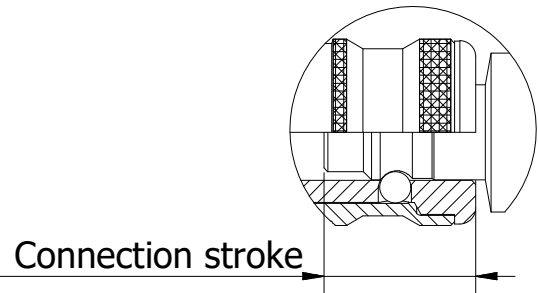

11	1	Back part	Steel, Zn 8 silver		
10	1	Spring	Stainless steel		
9	1	Spring	Stainless steel		
8	1	Lip seal	NBR		
7	1	Valve seat	Aluminium Lead Free		
6	1	O-ring	NBR		
5	1	O-ring	NBR		
4	1	Valve	Aluminium Lead Free		
3	1	Locking sleeve	Hard. steel, Zn 8 Silver		
2	2	Hook	Hard. Steel, Zn-Ni 8 transp.		
1	1	Front part	Hard. Steel, Zn-Ni 10 black		
Item	Qty	Description	Material		
State		Drawn	Checked	Approved	Date
Production		CABLIJA	ALAL	OSJO	2025-01-14
 Coupling R 1/2" male NBR - eSafe			ECO	Former No.	Scale
			002136		2 : 1
			Drawing No.	Issue	Sheet
			102912155	B	1 /(1)