

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D




C

B

A

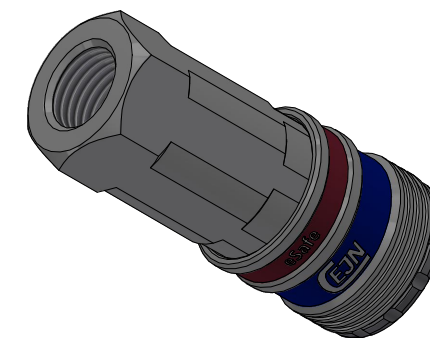

1 : 1

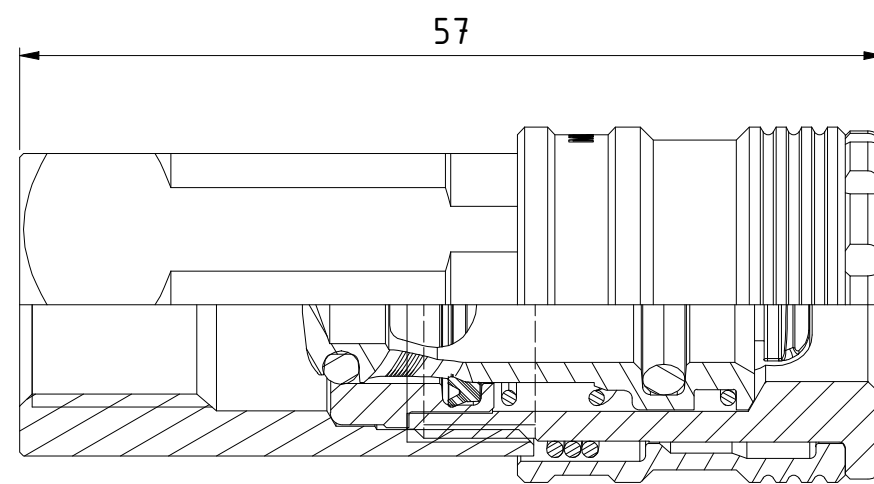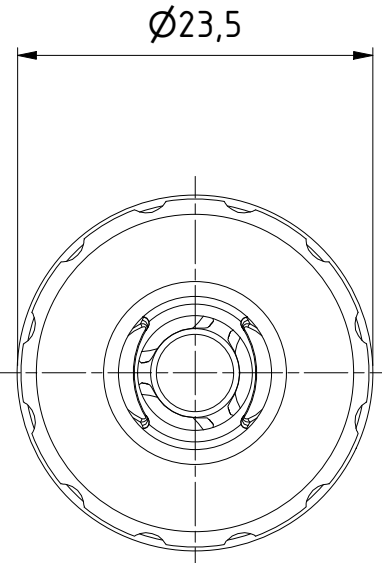

Connection stroke



Product No. 102912202	
Nominal flow Ø DN:	5.5 mm
Connection Stroke:	21.3 mm
Max WP Connected:	12 bar
Min BP Connected:	48 bar
Temperature range:	-20°C - +100°C
Connection:	G 1/4" fem
Sealing material:	NBR
Hexagon:	20

11	1	Back part	Steel, Zn 8 silver
10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	Lip seal	NBR
7	1	Valve seat	Aluminium Lead Free
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Valve	Aluminium Lead Free
3	1	Locking sleeve	Hard. steel, Zn 8 Silver
2	2	Hook	Hard. Steel, Zn-Ni 8 transp.
1	1	Front part	Hard. Steel, Zn-Ni 10 black

Item	Qty	Description	Material			
State		Drawn	Checked	Approved	Date	
Production		CABLIJA	ALAL	OSJO	2025-01-14	
 Coupling G 1/4" fem NBR - eSafe			ECO	Former No.		Scale
			002136			2 : 1
			Drawing No.	Issue		Sheet
			102912202	B		1 /(1)