

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D




C

B

A

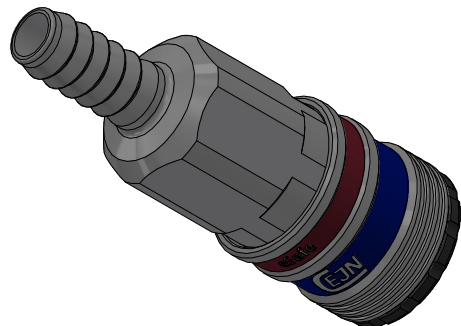

1 : 1

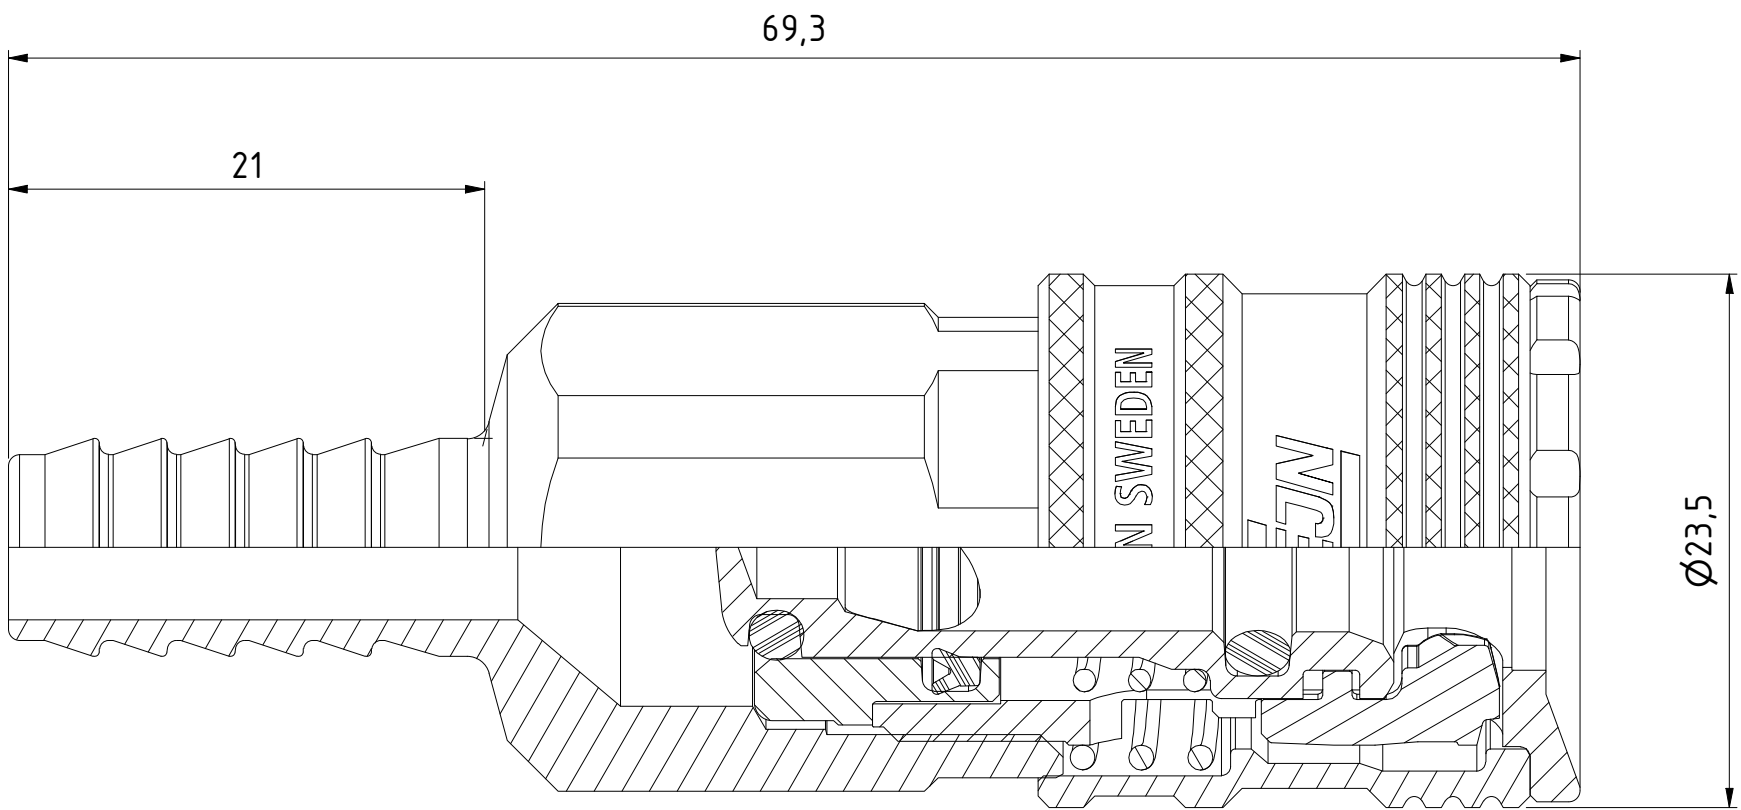

Connection stroke

11	1	Spring	Stainless steel	093003101
10	1	Locking sleeve	Hard. steel, Zn 8 Silver	093002540
9	2	Hook	Hard. Steel, Zn-Ni 8 transp.	093007040
8	1	Valve	Aluminium Lead Free	093003041
7	1	Valve seat	Aluminium Lead Free	093004022
6	1	Spring	Stainless steel	093003220
5	1	O-ring	NBR	094142800
4	1	O-ring	NBR	093002800
3	1	Lip seal	NBR	093003604
2	1	Front part	Hard. Steel, Zn-Ni 10 black	093002040
1	1	Back part	Steel, Zn 8 Silver	093054203

Item	Qty	Description	Material	Part Number
State		Drawn	Checked	Approved
Production		CABLIJA	ALAL	OSJO
Date		2025-01-14		Scale
ECO		002136	Former No.	3 : 1
Drawing No.		103002003		Issue
				Sheet
				1 /(1)



Coupling 5/16" hose NBR - eSafe

Product No.	103002003
Nominal flow Ø DN:	5,5 mm
Connection Stroke:	21,8 mm
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C - +100°C
Connection:	Hose 5/16" 8mm
Sealing material:	NBR
Hexagon:	20