

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C


B

A




69,8

21

Ø23,5

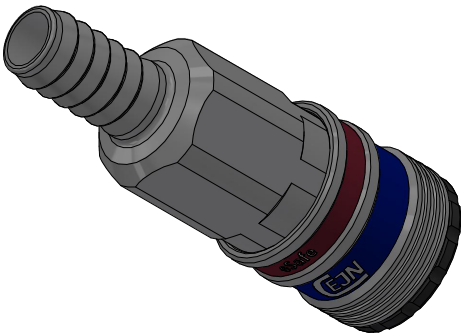

1 : 1



Connection stroke

Product No.	103002004
Nominal flow Ø DN:	5,5 mm
Connection Stroke:	21,8 mm
Max WP Connected:	16 bar
Min BP Connected:	64 bar
Temperature range:	-20°C - +100°C
Connection:	Hose 3/8" 10mm
Sealing material:	NBR
Hexagon:	20

11	1	Spring	Stainless steel	093003101
10	1	Locking sleeve	Hard. steel, Zn 8 Silver	093002540
9	2	Hook	Hard. Steel, Zn-Ni 8 transp.	093007040
8	1	Valve	Aluminium Lead Free	093003041
7	1	Valve seat	Aluminium Lead Free	093004022
6	1	Spring	Stainless steel	093003220
5	1	O-ring	NBR	094142800
4	1	O-ring	NBR	093002800
3	1	Lip seal	NBR	093003604
2	1	Front part	Hard. Steel, Zn-Ni 10 black	093002040
1	1	Back part	Steel, Zn 8 Silver	093054204
Item	Qty	Description	Material	Part Number
State		Drawn	Checked	Approved
Production		CABLIJA	ALAL	OSJO
		ECO		Date
		002136		2025-01-14
		Former No.		Scale
				3 : 1
		Drawing No.		Issue
		103002004		C
				Sheet
				1 /(1)



Coupling 3/8" hose NBR - eSafe

002136

Drawing No.

103002004

Former No.

Issue

C

Scale

Sheet

1 /(1)