

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D





C

B

A

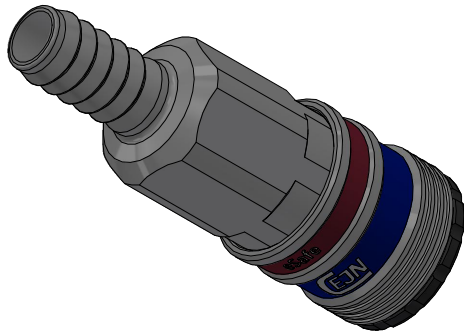

1 : 1

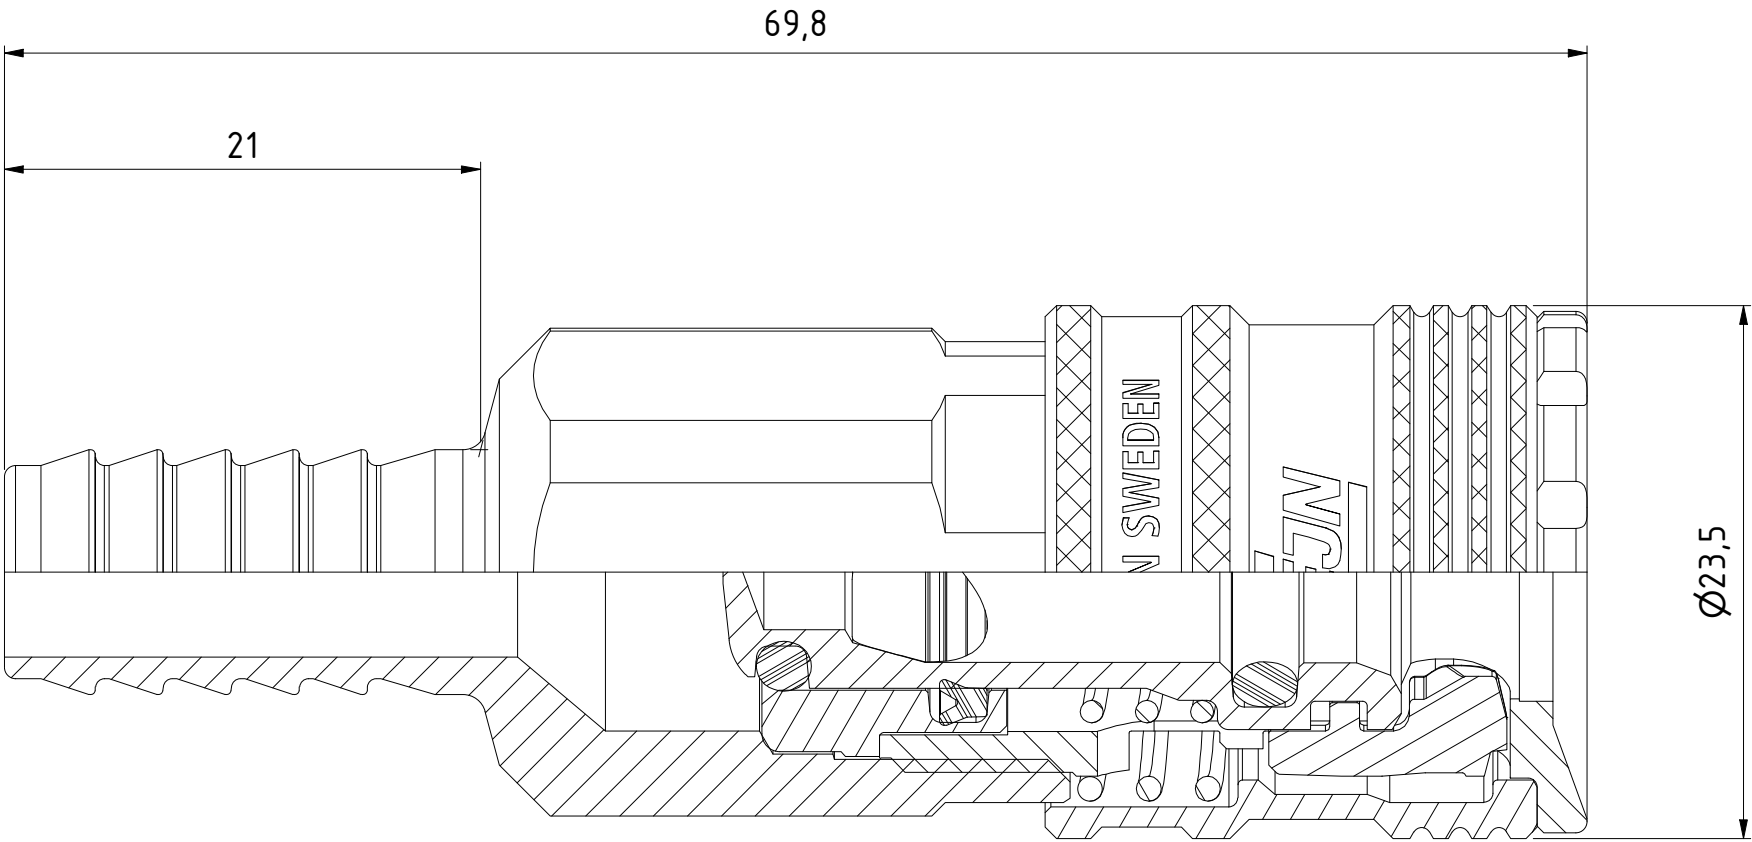

Connection stroke

Product No. 103002009

Nominal flow Ø DN: 5,5 mm
Connection Stroke: 21,8 mm
Max WP Connected: 16 bar
Min BP Connected: 64 bar
Temperature range: -20°C - +100°C
Connection: Hose 9mm
Sealing material: NBR
Hexagon: 20

11	1	Spring	Stainless steel	093003101
10	1	Locking sleeve	Hard. steel, Zn 8 Silver	093002540
9	2	Hook	Hard. Steel, Zn-Ni 8 transp.	093007040
8	1	Valve	Aluminium Lead Free	093003041
7	1	Valve seat	Aluminium Lead Free	093004022
6	1	Spring	Stainless steel	093003220
5	1	O-ring	NBR	094142800
4	1	O-ring	NBR	093002800
3	1	Lip seal	NBR	093003604
2	1	Front part	Hard. Steel, Zn-Ni 10 black	093002040
1	1	Back part	Steel, Zn 8 Silver	093054209
Item	Qty	Description	Material	Part Number

State	Drawn	Checked	Approved	Date
Production	CABLIJA	ALAL	OSJO	2025-01-14
ECO		Former No.	Scale	
002136			3 : 1	
Drawing No.			Issue	Sheet
103002009			C	1 /(1)



Coupling 9mm hose NBR - eSafe