

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B



A

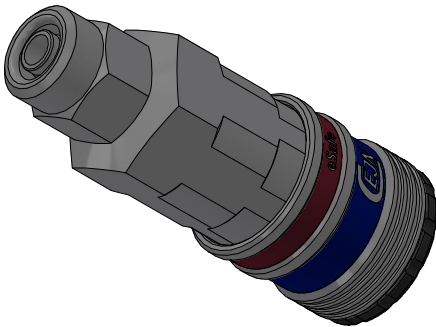

1 : 1

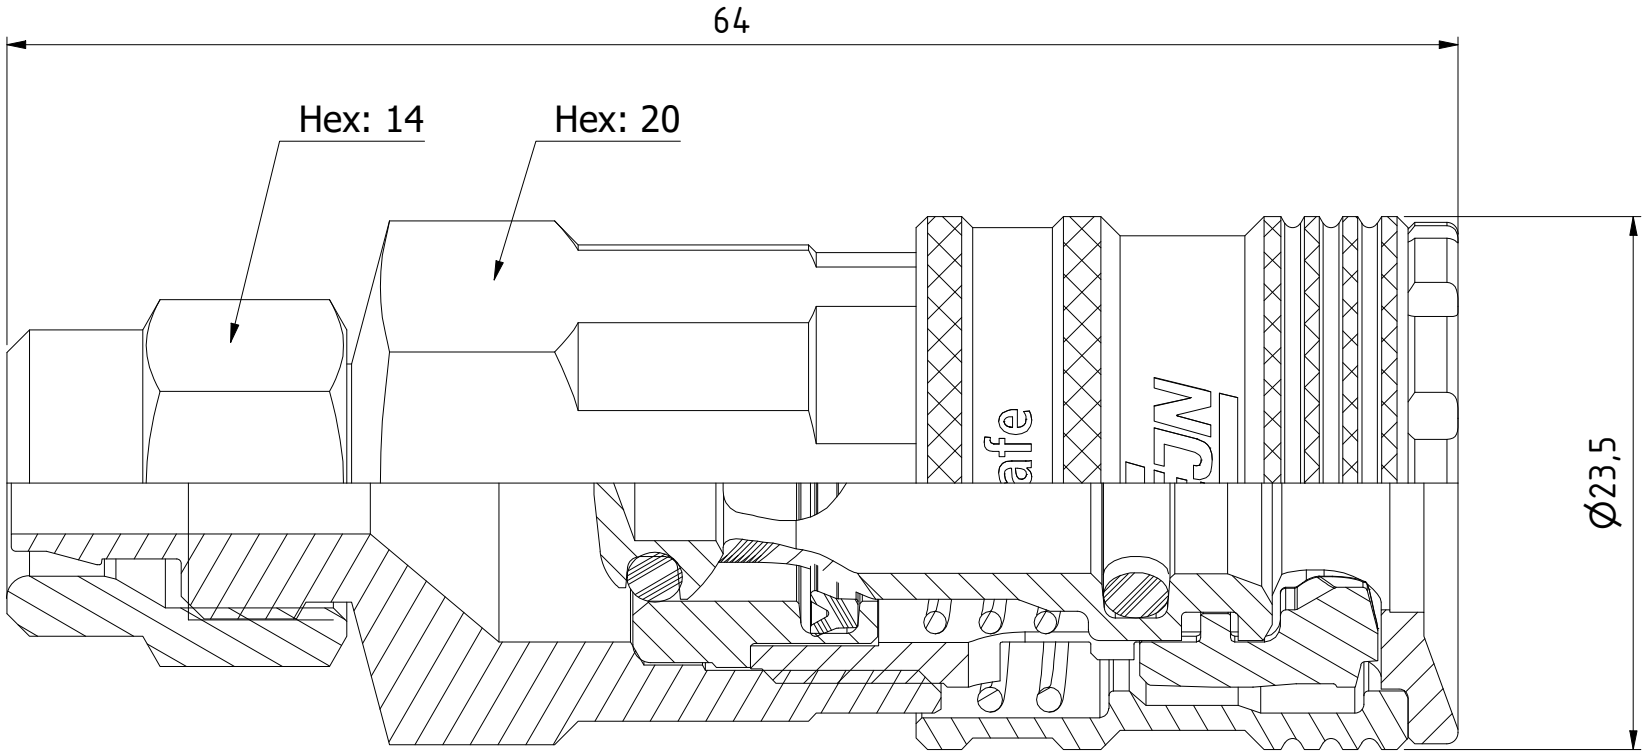

* WP/BP is valid with CEJN non-braided hose



Connection stroke

12	1	Spring	Stainless steel	093003101
11	1	Locking sleeve	Hard. steel, Zn 8 Silver	093002540
10	2	Hook	Hard. Steel, Zn-Ni 8 transp.	093007040
9	1	Valve	Aluminium Lead Free	093003041
8	1	Valve seat	Aluminium Lead Free	093004022
7	1	Spring	Stainless steel	093003220
6	1	O-ring	NBR	094142800
5	1	O-ring	NBR	093002800
4	1	Lip seal	NBR	093003604
3	1	Front part	Hard. Steel, Zn-Ni 10 black	093002040
2	1	Swivel nut	Steel, Zn 8 Silver	093000858
1	1	Back part	Steel, Zn 8 Silver	093054258

Item	Qty	Description	Material	Part Number
State		Drawn	Checked	Approved
Production		CABLIJA	ALAL	OSJO
Date		2025-01-14		Scale
ECO		002136	Former No.	3 : 1
Drawing No.		103002058		Issue
				Sheet
				1 /(1)



Coupling Stream-Line 5 x 8
mm NBR - eSafe

Product No.	103002058
Nominal flow Ø DN:	4,5 mm
Connection Stroke:	21,8 mm
Max WP Connected:	10 bar*
Min BP Connected:	25 bar*
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 5x8
Sealing material:	NBR
Hexagon:	See drawing