

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

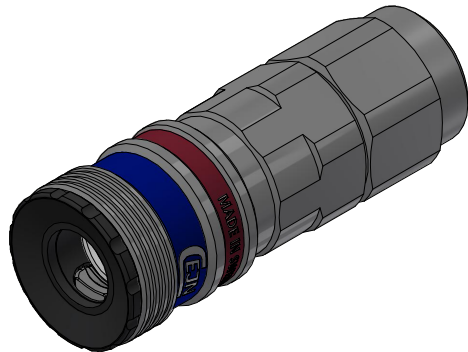

1 : 1

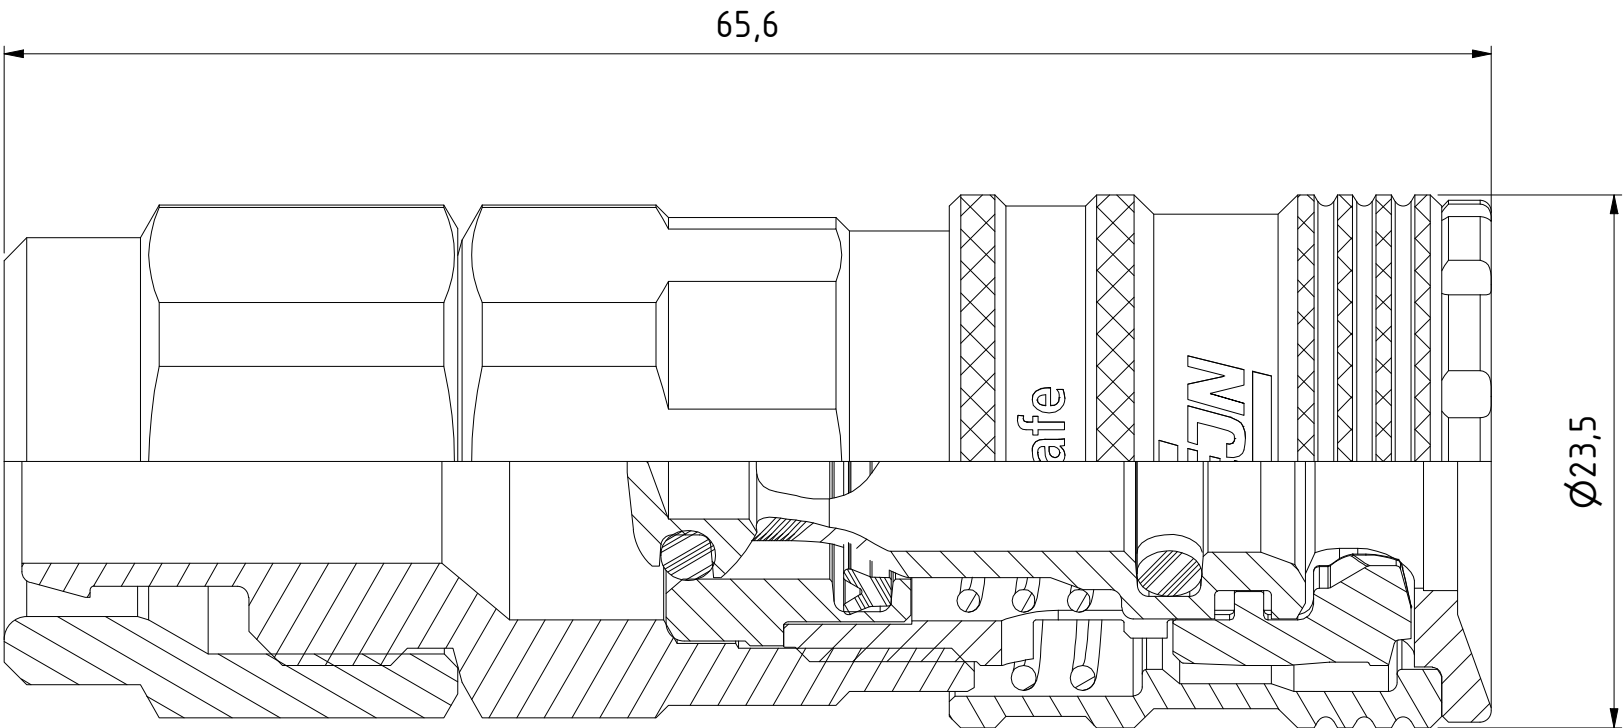

Connection stroke

12	1	Spring	Stainless steel
11	1	Locking sleeve	Hard. steel, Zn 8 Silver
10	2	Hook	Hard. Steel, Zn-Ni 8 transp.
9	1	Valve	Aluminium Lead Free
8	1	Valve seat	Aluminium Lead Free
7	1	Spring	Stainless steel
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Lip seal	NBR
3	1	Front part	Hard. Steel, Zn-Ni 10 black
2	1	Swivel nut 9,5x13,5	Steel, Zn 8 silver
1	1	Back part 9,5x13,5	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
ECO		Approved	Date
002136		OSJO	2025-01-14
Former No.		Scale	
Drawing No.		3 : 1	
103002063		Issue	Sheet
		D	1 /(1)



Coupling Stream-Line 9.5 x 13.5 mm NBR - eSafe

Product No.	103002063
Nominal flow Ø DN:	5,5 mm
Connection Stroke:	21,8 mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 9,5x13,5
Sealing material:	NBR
Hexagon:	21 (2x)