

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D


C

B

A

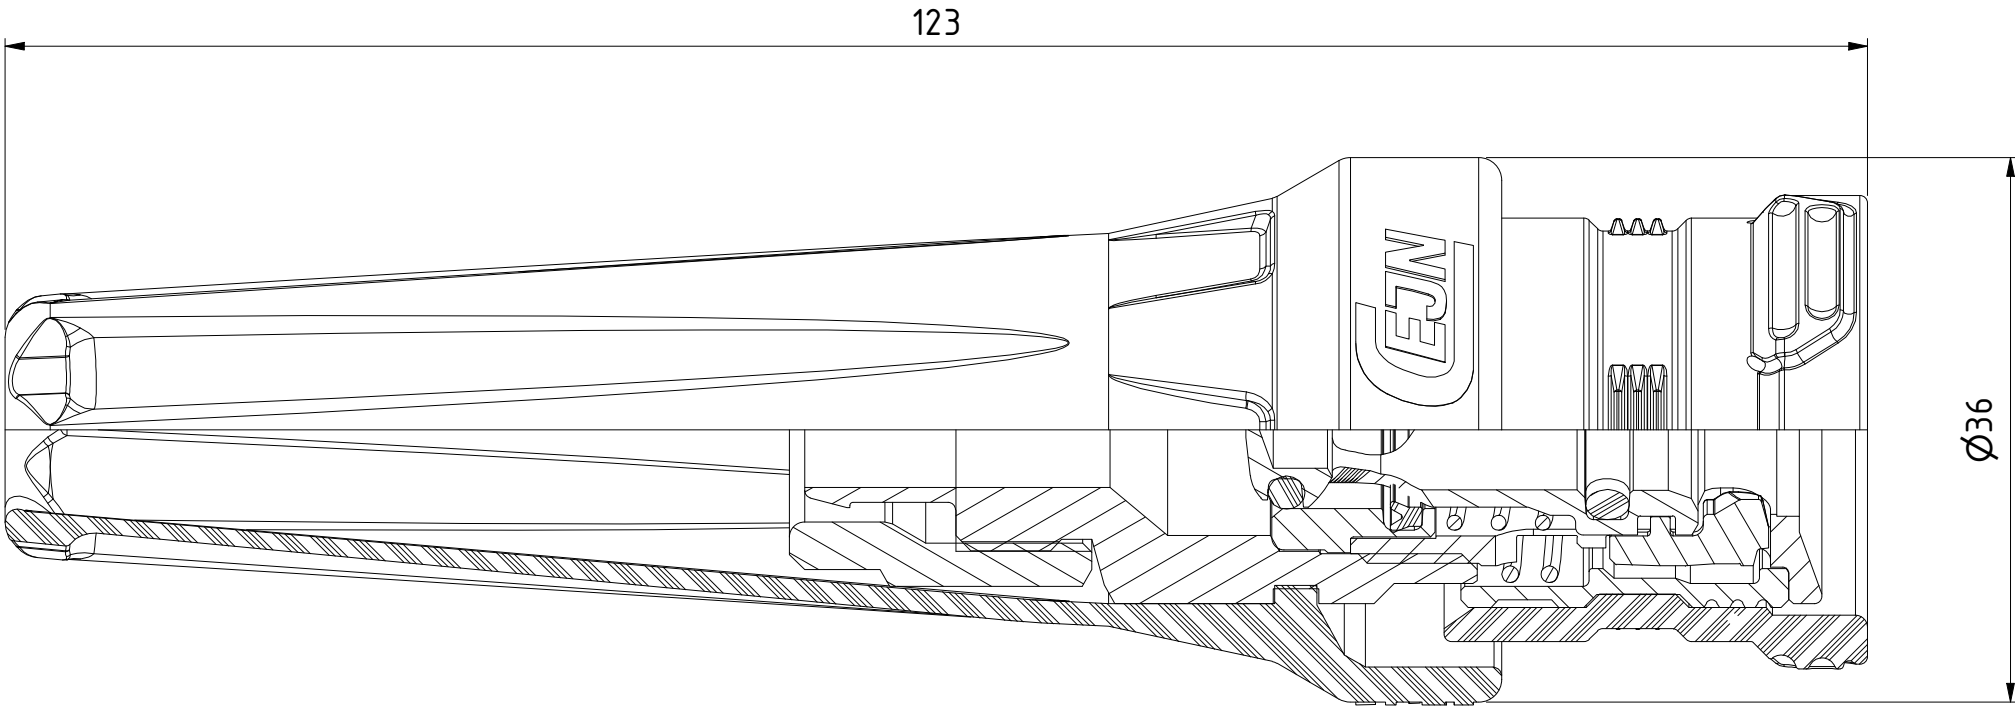

1 : 2

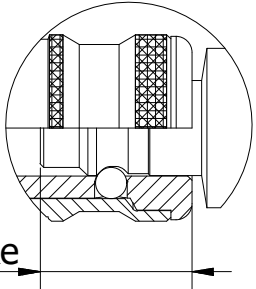

Connection stroke

|    |   |                      |                              |
|----|---|----------------------|------------------------------|
| 14 | 1 | Spring               | Stainless steel              |
| 13 | 1 | Locking sleeve       | Hard. steel, Zn 8 Silver     |
| 12 | 2 | Hook                 | Hard. Steel, Zn-Ni 8 transp. |
| 11 | 1 | Spring               | Stainless steel              |
| 10 | 1 | Valve                | Aluminium Lead Free          |
| 9  | 1 | O-ring               | NBR                          |
| 8  | 1 | O-ring               | NBR                          |
| 7  | 1 | Lip seal             | NBR                          |
| 6  | 1 | Valve seat           | Aluminium Lead Free          |
| 5  | 1 | Front part           | Hard. Steel, Zn-Ni 10 black  |
| 4  | 1 | Back Part Cover      | Rubber                       |
| 3  | 1 | Locking Sleeve Cover | Rubber                       |
| 2  | 1 | Swivel nut 8x12      | Steel, Zn 8 Silver           |
| 1  | 1 | Back part            | Aluminium                    |

| Item                                                                                  | Qty                                                   | Description |             |          | Material   |            |       |         |
|---------------------------------------------------------------------------------------|-------------------------------------------------------|-------------|-------------|----------|------------|------------|-------|---------|
| State                                                                                 |                                                       | Drawn       | Checked     | Approved |            | Date       |       |         |
| Production                                                                            |                                                       | CABLIJA     | ALAL        | OSJO     |            | 2025-01-14 |       |         |
|  | Coupling Stream-Line 8 x 12 mm NBR - eSafe, Soft-Line |             | ECO         |          | Former No. |            | Scale |         |
|                                                                                       |                                                       |             | 002136      |          |            |            | 2 : 1 |         |
|                                                                                       |                                                       |             | Drawing No. |          |            |            | Issue | Sheet   |
|                                                                                       |                                                       |             | 103002082   |          |            |            | D     | 1 /(1 ) |

|                    |                                 |
|--------------------|---------------------------------|
| Product No.        | 103002082                       |
| Nominal flow Ø DN: | 5,5 mm                          |
| Connection Stroke: | 21,8 mm                         |
| Max WP Connected:  | 16 bar w. CEJN braided PUR hose |
| Min BP Connected:  | 64 bar w. CEJN braided PUR hose |
| Temperature range: | -20°C - +100°C                  |
| Connection:        | Stream-Line 8x12                |
| Sealing material:  | NBR                             |
| Hexagon:           | 19/21                           |