

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D




C

B

A

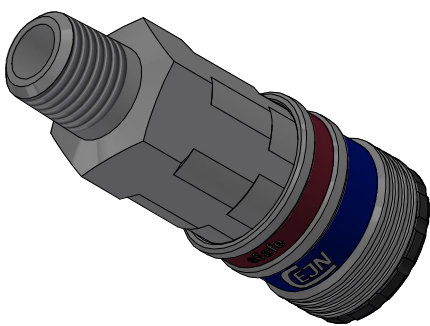

1 : 1

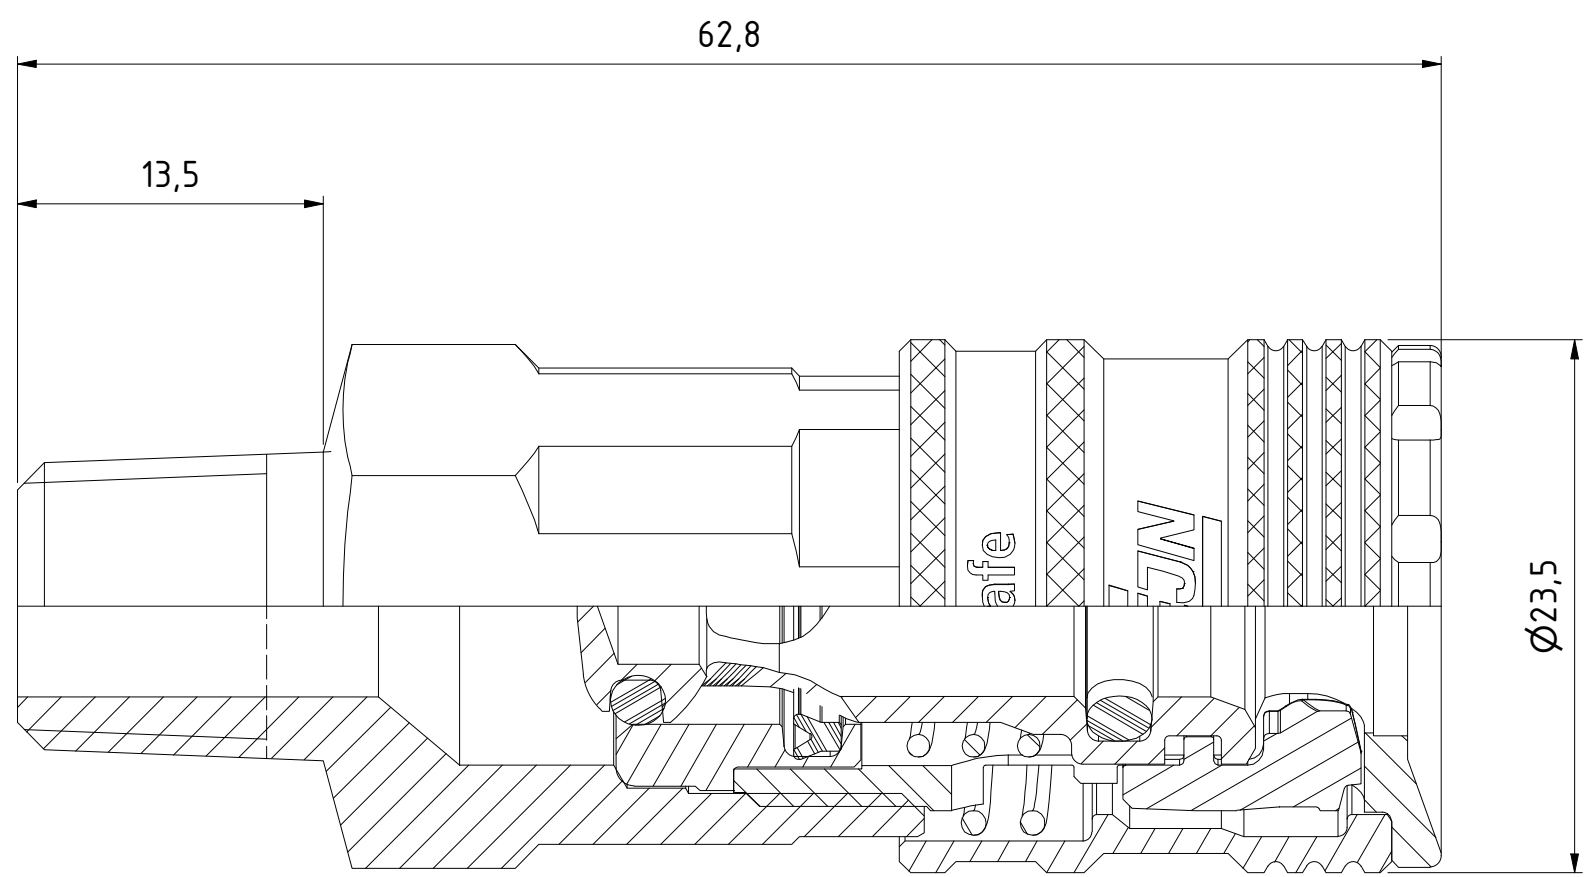

Connection stroke

Product No.	103002152
Nominal flow Ø DN:	5,5 mm
Connection Stroke:	21,8 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	R 1/4" Male
Sealing material:	NBR
Hexagon:	20

11	1	Spring	Stainless steel			
10	1	Locking sleeve	Hard. steel, Zn 8 Silver			
9	2	Hook	Hard. Steel, Zn-Ni 8 transp.			
8	1	Valve	Aluminium Lead Free			
7	1	Valve seat	Aluminium Lead Free			
6	1	Spring	Stainless steel			
5	1	O-ring	NBR			
4	1	O-ring	NBR			
3	1	Lip seal	NBR			
2	1	Front part	Hard. Steel, Zn-Ni 10 black			
1	1	Back part	Steel, Zn 8 silver			
Item	Qty	Description	Material			
State		Drawn	Checked	Approved	Date	
Production		CABLIJA	ALAL	OSJO	2025-01-14	
		Coupling R 1/4" male NBR - eSafe		ECO	Former No.	Scale
				002136		3 : 1
				Drawing No.	Issue	Sheet
				103002152	B	1 /(1)