

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D




C

B

A

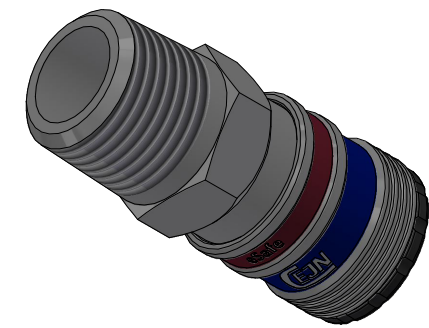

1 : 1

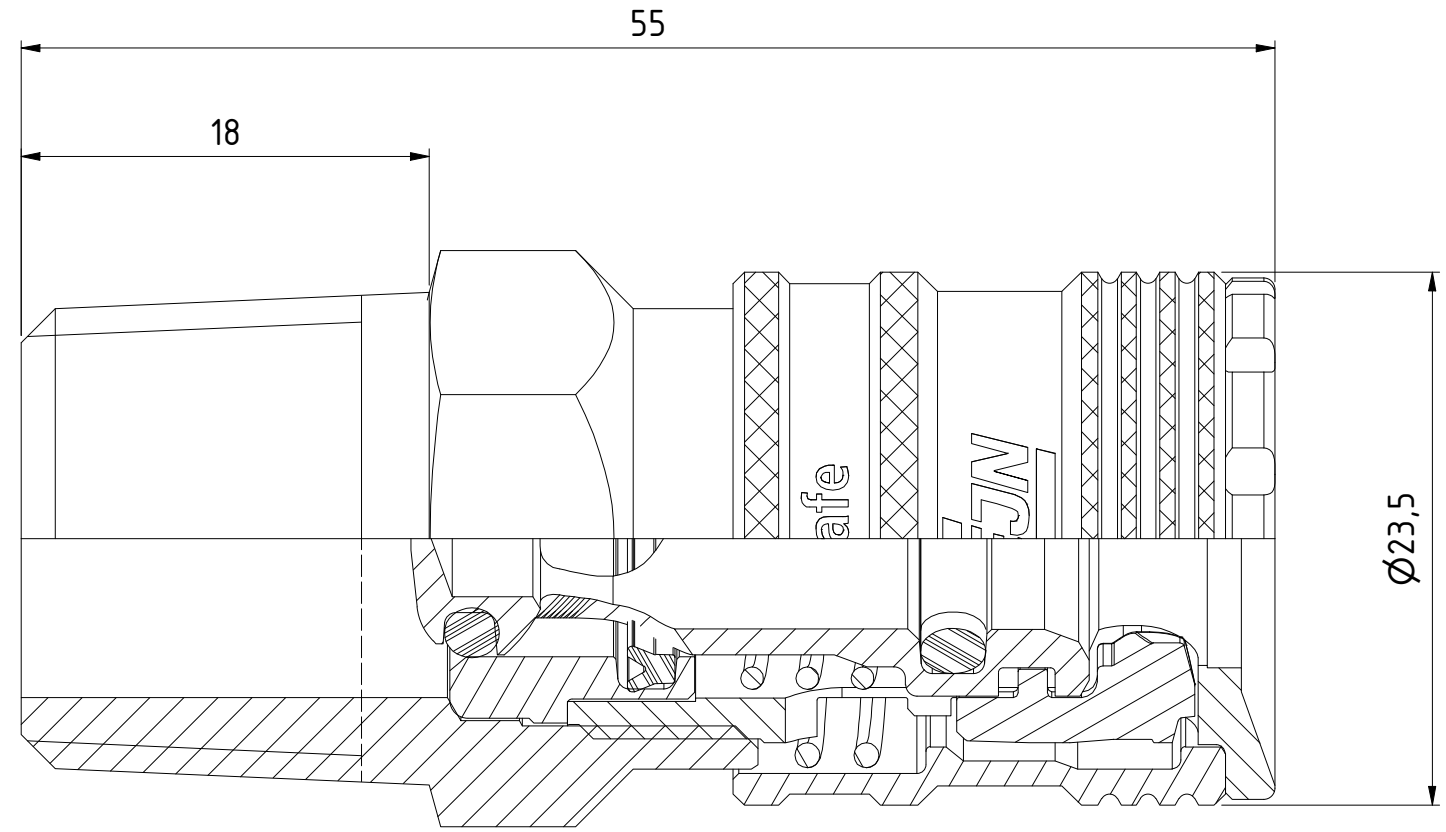

Connection stroke

Product No. 103002155	
Nominal flow Ø DN:	5,5 mm
Connection Stroke:	21,8 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	R 1/2" Male
Sealing material:	NBR
Hexagon:	22

11	1	Spring	Stainless steel			
10	1	Locking sleeve	Hard. steel, Zn 8 Silver			
9	2	Hook	Hard. Steel, Zn-Ni 8 transp.			
8	1	Valve	Aluminium Lead Free			
7	1	Valve seat	Aluminium Lead Free			
6	1	Spring	Stainless steel			
5	1	O-ring	NBR			
4	1	O-ring	NBR			
3	1	Lip seal	NBR			
2	1	Front part	Hard. Steel, Zn-Ni 10 black			
1	1	Back part	Steel, Zn 8 silver			
Item	Qty	Description	Material			
State Production		Drawn CABLIJA	Checked ALAL	Approved OSJO	Date 2025-01-14	
 Coupling R 1/2" male NBR - eSafe		ECO 002136	Former No.		Scale 3 : 1	
		Drawing No. 103002155			Issue B	Sheet 1 /(1)