

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D




C

B

A

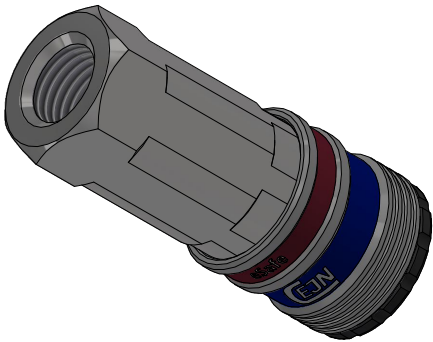

1 : 1

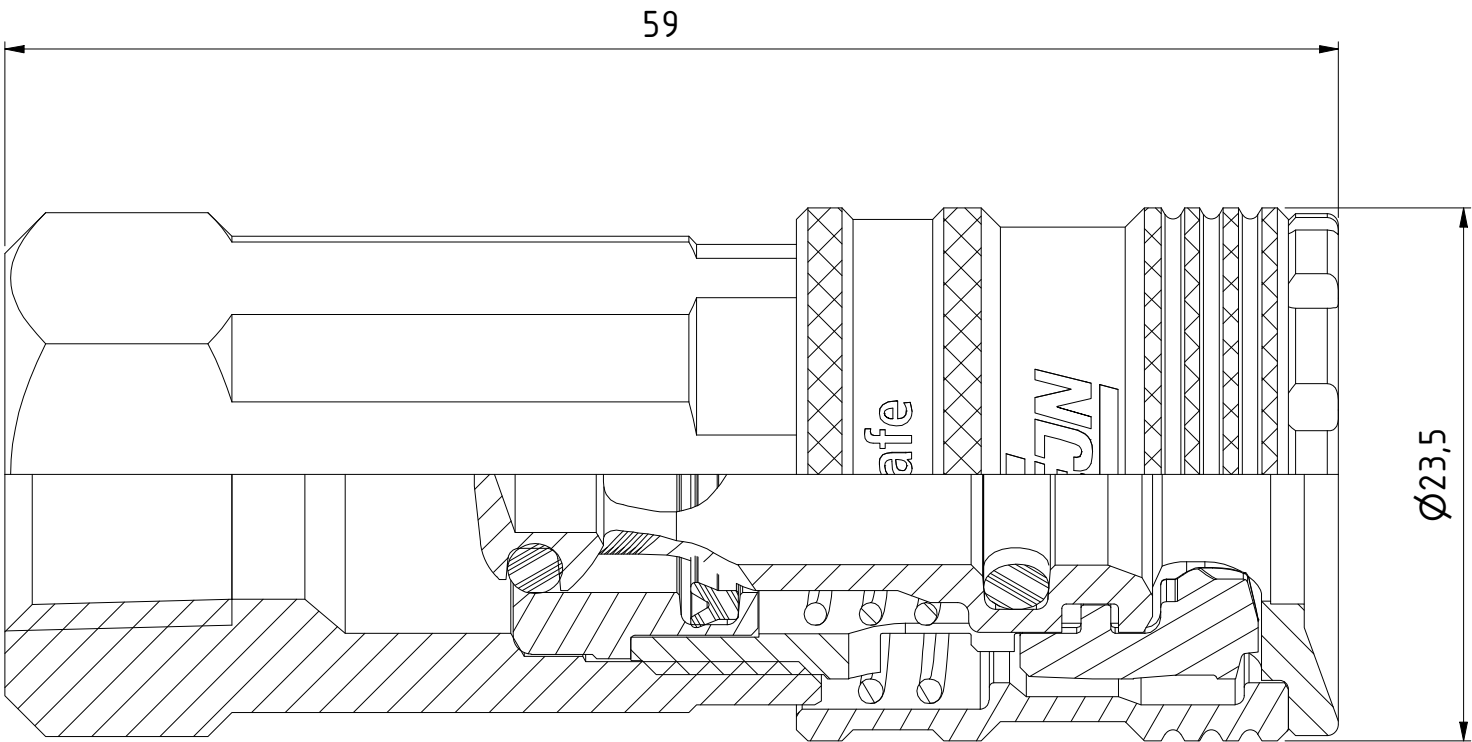

Connection stroke

|                       |                |
|-----------------------|----------------|
| Product No. 103002402 |                |
| Nominal flow Ø DN:    | 5,5 mm         |
| Connection Stroke:    | 21,8 mm        |
| Max WP Connected:     | 16 bar         |
| Min BP Connected:     | 140 bar        |
| Temperature range:    | -20°C - +100°C |
| Connection:           | NPT 1/4" Fem   |
| Sealing material:     | NBR            |
| Hexagon:              | 20             |

|    |   |                |                              |
|----|---|----------------|------------------------------|
| 11 | 1 | Spring         | Stainless steel              |
| 10 | 1 | Locking sleeve | Hard. steel, Zn 8 Silver     |
| 9  | 2 | Hook           | Hard. Steel, Zn-Ni 8 transp. |
| 8  | 1 | Valve          | Aluminium Lead Free          |
| 7  | 1 | Valve seat     | Aluminium Lead Free          |
| 6  | 1 | Spring         | Stainless steel              |
| 5  | 1 | O-ring         | NBR                          |
| 4  | 1 | O-ring         | NBR                          |
| 3  | 1 | Lip seal       | NBR                          |
| 2  | 1 | Front part     | Hard. Steel, Zn-Ni 10 black  |
| 1  | 1 | Back part      | Steel, Zn 8 silver           |

| Item                                                                                                                    | Qty | Description | Material    |            |            |         |
|-------------------------------------------------------------------------------------------------------------------------|-----|-------------|-------------|------------|------------|---------|
| State                                                                                                                   |     | Drawn       | Checked     | Approved   | Date       |         |
| Production                                                                                                              |     | CABLIJA     | ALAL        | OSJO       | 2025-01-14 |         |
|  Coupling 1/4" NPT fem NBR - eSafe |     |             | ECO         | Former No. |            | Scale   |
|                                                                                                                         |     |             | 002136      |            |            | 3 : 1   |
|                                                                                                                         |     |             | Drawing No. |            | Issue      | Sheet   |
|                                                                                                                         |     |             | 103002402   |            | B          | 1 /(1 ) |