

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



A3

D

C

B


A

D




C

B

A

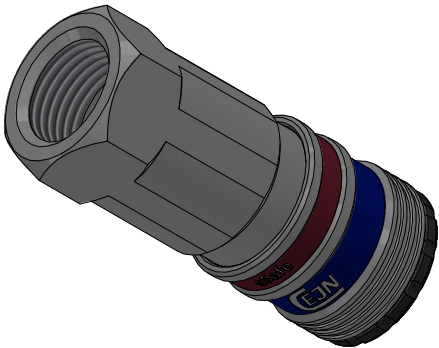

1 : 1

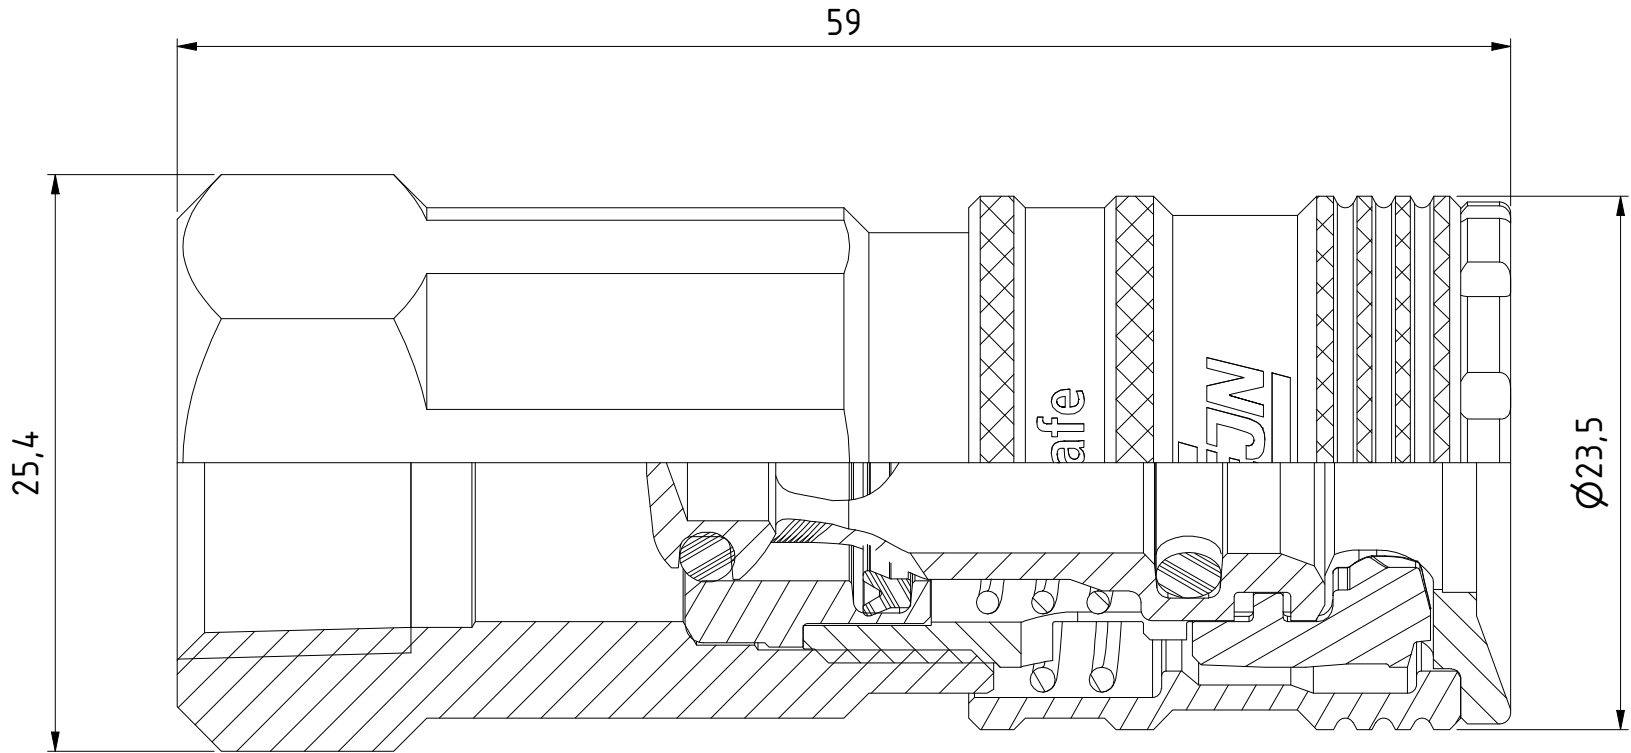

Connection stroke

Product No.	103002404
Nominal flow Ø DN:	5,5 mm
Connection Stroke:	21,8 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	NPT 3/8" Fem
Sealing material:	NBR
Hexagon:	22

11	1	Spring	Stainless steel
10	1	Locking sleeve	Hard. steel, Zn 8 Silver
9	2	Hook	Hard. Steel, Zn-Ni 8 transp.
8	1	Valve	Aluminium Lead Free
7	1	Valve seat	Aluminium Lead Free
6	1	Spring	Stainless steel
5	1	O-ring	NBR
4	1	O-ring	NBR
3	1	Lip seal	NBR
2	1	Front part	Hard. Steel, Zn-Ni 10 black
1	1	Back part	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABLIJA	ALAL
ECO		Approved	Date
002136		OSJO	2025-01-14
Former No.		Scale	
Drawing No.		3 : 1	
103002404		Issue	Sheet
		B	1 /(1)



Coupling 3/8" NPT fem NBR - eSafe