

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

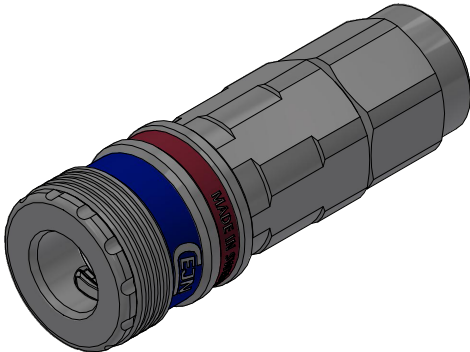


1 : 1

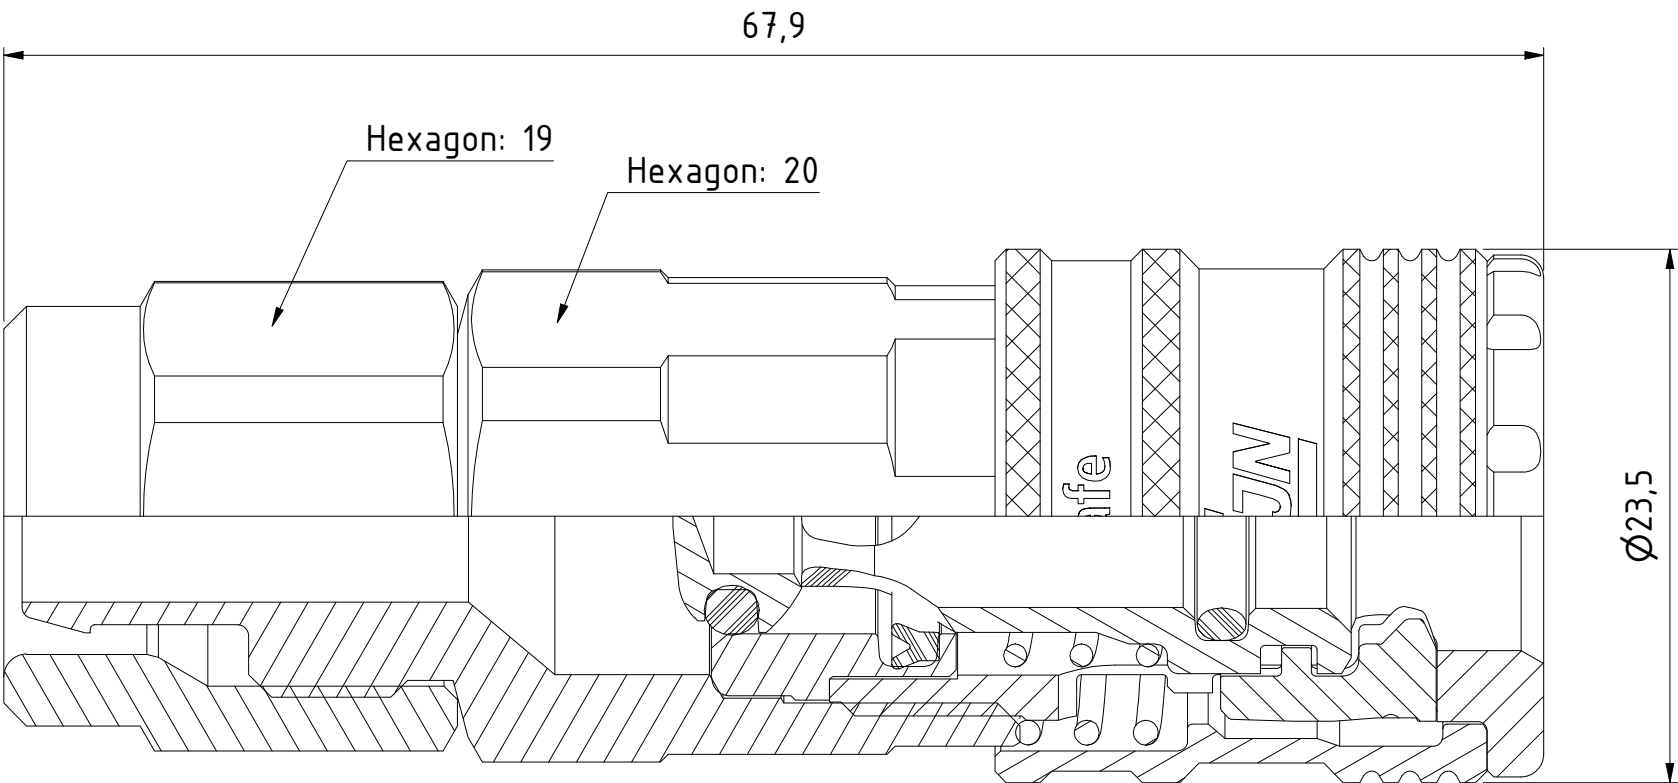

12	1	Valve	Aluminum Lead Free
11	1	Valve seat	Aluminium Lead Free
10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	Lip seal	NBR
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Locking sleeve	Hard. steel, Zn 8 Silver
4	2	Hook	Hard. Steel, Zn-Ni 8 transp.
3	1	Front part	Hard. Steel, Zn 8 Silver
2	1	Swivel nut 8x12	Steel, Zn 8 Silver
1	1	Back part 8x12	Steel, Zn 8 Silver

Item	Qty	Description	Material
State		Drawn	Checked
Production		CABALAL	LIJA
ECO		Approved	Date
002136		OSJO	2025-01-17
Former No.		Scale	
		3 : 1	
Drawing No.		Issue	Sheet
103102062		E	1 /(1)



Connection stroke

Product No.	103102062
Nominal flow Ø DN:	5,3 mm
Connection Stroke:	19,5 mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 8x12
Sealing material:	NBR
Hexagon:	See drawing



Coupling Stream-Line 8 x 12
mm NBR - eSafe

ECO
002136
Drawing No.
103102062

Former No.
Issue
E
Scale
3 : 1
Sheet
1 /(1)