

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D



C

B

A

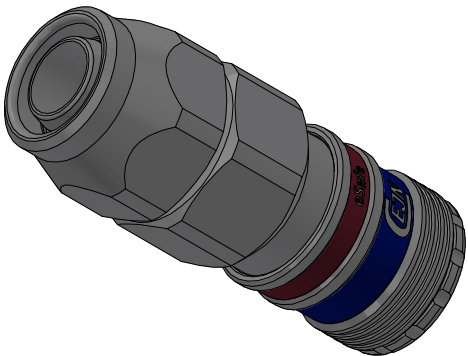


1 : 1

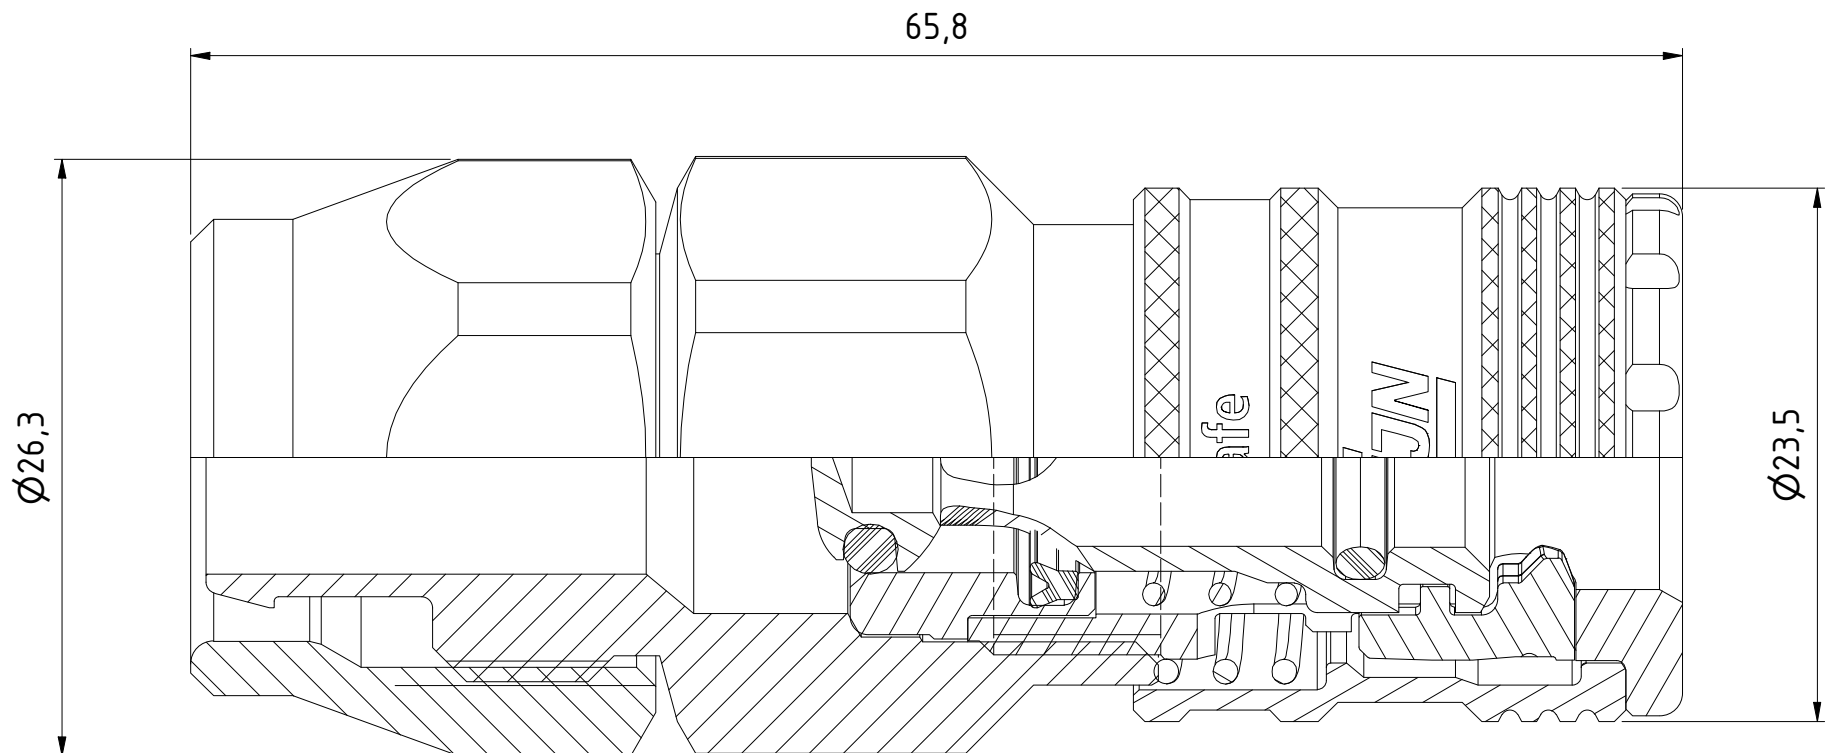

12	1	Valve	Aluminum Lead Free
11	1	Valve seat	Aluminium Lead Free
10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	Lip seal	NBR
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Locking sleeve	Hard. steel, Zn 8 Silver
4	2	Hook	Hard. Steel, Zn-Ni 8 transp.
3	1	Front part	Hard. Steel, Zn 8 Silver
2	1	Swivel nut 11x16	Steel, Zn 8 Silver
1	1	Back part 11x16	Steel, Zn 8 Silver

Item	Qty	Description	Material
12	1	Valve	Aluminum Lead Free
11	1	Valve seat	Aluminium Lead Free
10	1	Spring	Stainless steel
9	1	Spring	Stainless steel
8	1	Lip seal	NBR
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Locking sleeve	Hard. steel, Zn 8 Silver
4	2	Hook	Hard. Steel, Zn-Ni 8 transp.
3	1	Front part	Hard. Steel, Zn 8 Silver
2	1	Swivel nut 11x16	Steel, Zn 8 Silver
1	1	Back part 11x16	Steel, Zn 8 Silver

State	Drawn	Checked	Approved	Date
Production	CABALAL	LIJA	OSJO	2025-01-17
ECO		Former No.		Scale
002136				3 : 1
Drawing No.			Issue	Sheet
103102066			D	1 /(1)



Connection stroke

Product No.	103102066
Nominal flow Ø DN:	5,3 mm
Connection Stroke:	19,5 mm
Max WP Connected:	12 bar w. CEJN braided PUR hose
Min BP Connected:	48 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 11x16
Sealing material:	NBR
Hexagon:	24 (2x)



Coupling Stream-Line 11x16
mm NBR - eSafe

002136

103102066

Former No.

Issue

D

Scale

3 : 1

Sheet

1 /(1)