

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©



D

C

B


A

D

C

B

A

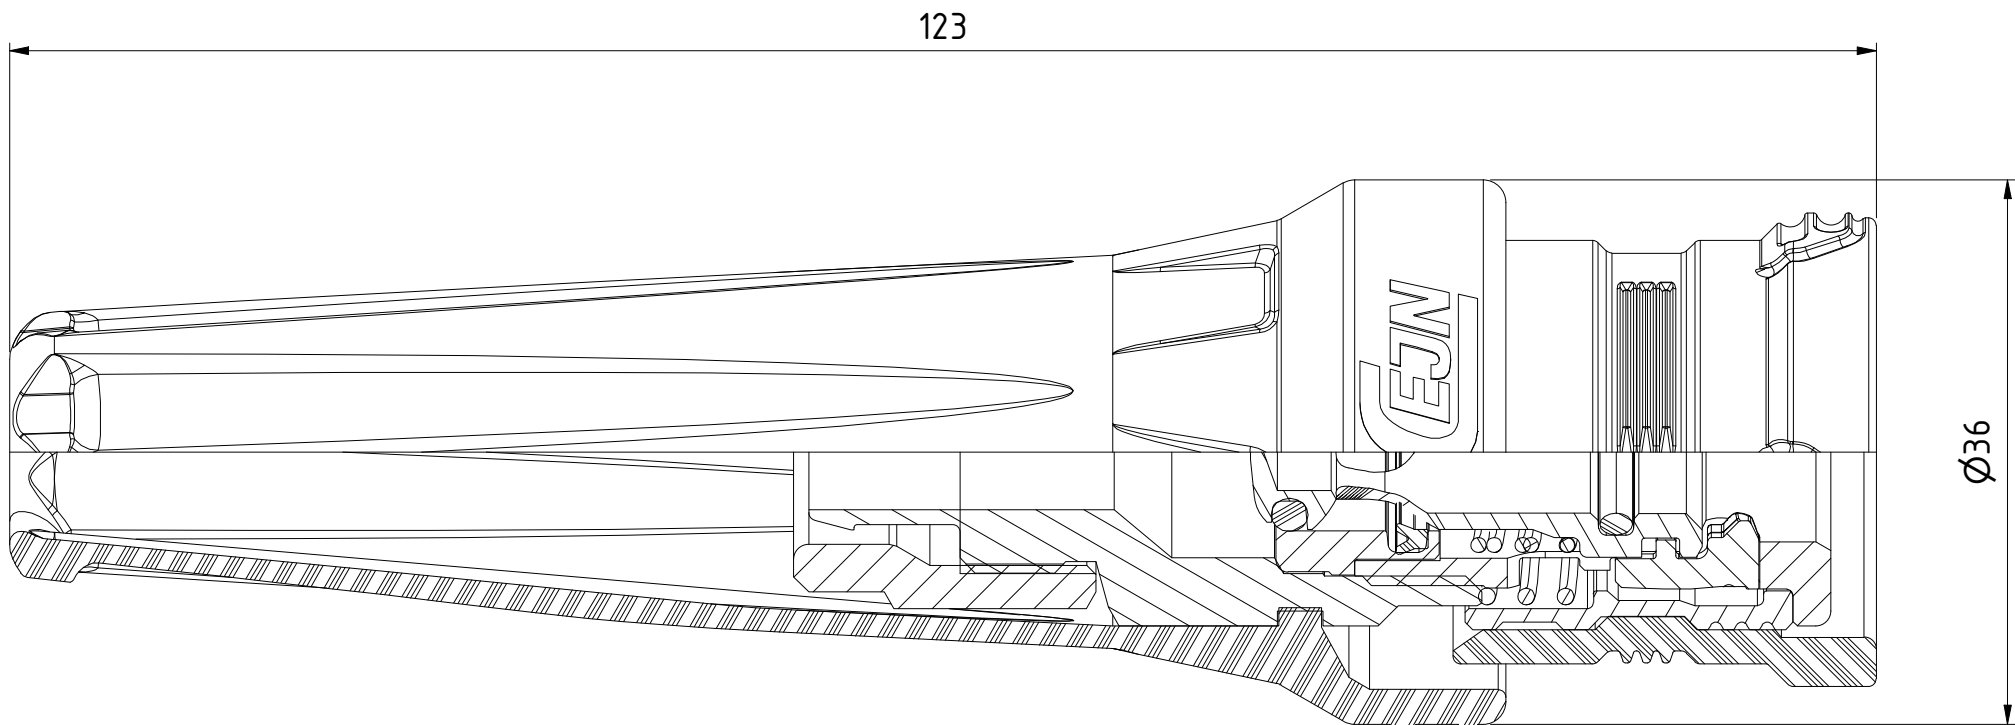

1 : 2

14	1	Back Part Cover	Rubber
13	1	Locking Sleeve Cover	Rubber
12	1	Spring	Stainless steel
11	1	Spring	Stainless steel
10	1	Lip seal	NBR
9	1	Valve seat	Aluminium Lead Free
8	1	O-ring	NBR
7	1	O-ring	NBR
6	1	Valve	Aluminum Lead Free
5	1	Locking sleeve	Hard. steel, Zn 8 Silver
4	2	Hook	Hard. Steel, Zn-Ni 8 transp.
3	1	Front part	Hard. Steel, Zn 8 Silver
2	1	Swivel nut 8x12	Steel, Zn 8 Silver
1	1	Back part	Aluminium

Item	Qty	Description			Material		
State		Drawn	Checked	Approved	Date		
Production		CABLIJA	ALAL	OSJO	2025-04-25		
	Coupling Stream-Line 8 x 12 mm NBR - eSafe, Soft-Line		ECO	Former No.		Scale	
			002136			2 : 1	
			Drawing No.		Issue	Sheet	
			103102082		D	1 /(1)	

Product No.	103102082
Nominal flow Ø DN:	5,3 mm
Connection Stroke:	19,5 mm
Max WP Connected:	16 bar w. CEJN braided PUR hose
Min BP Connected:	64 bar w. CEJN braided PUR hose
Temperature range:	-20°C - +100°C
Connection:	Stream-Line 8x12
Sealing material:	NBR
Hexagon:	19/21

