

This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences ©





D

C

B

A

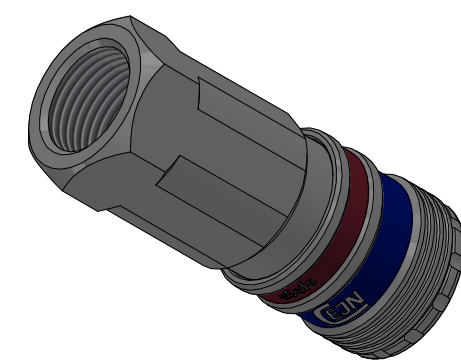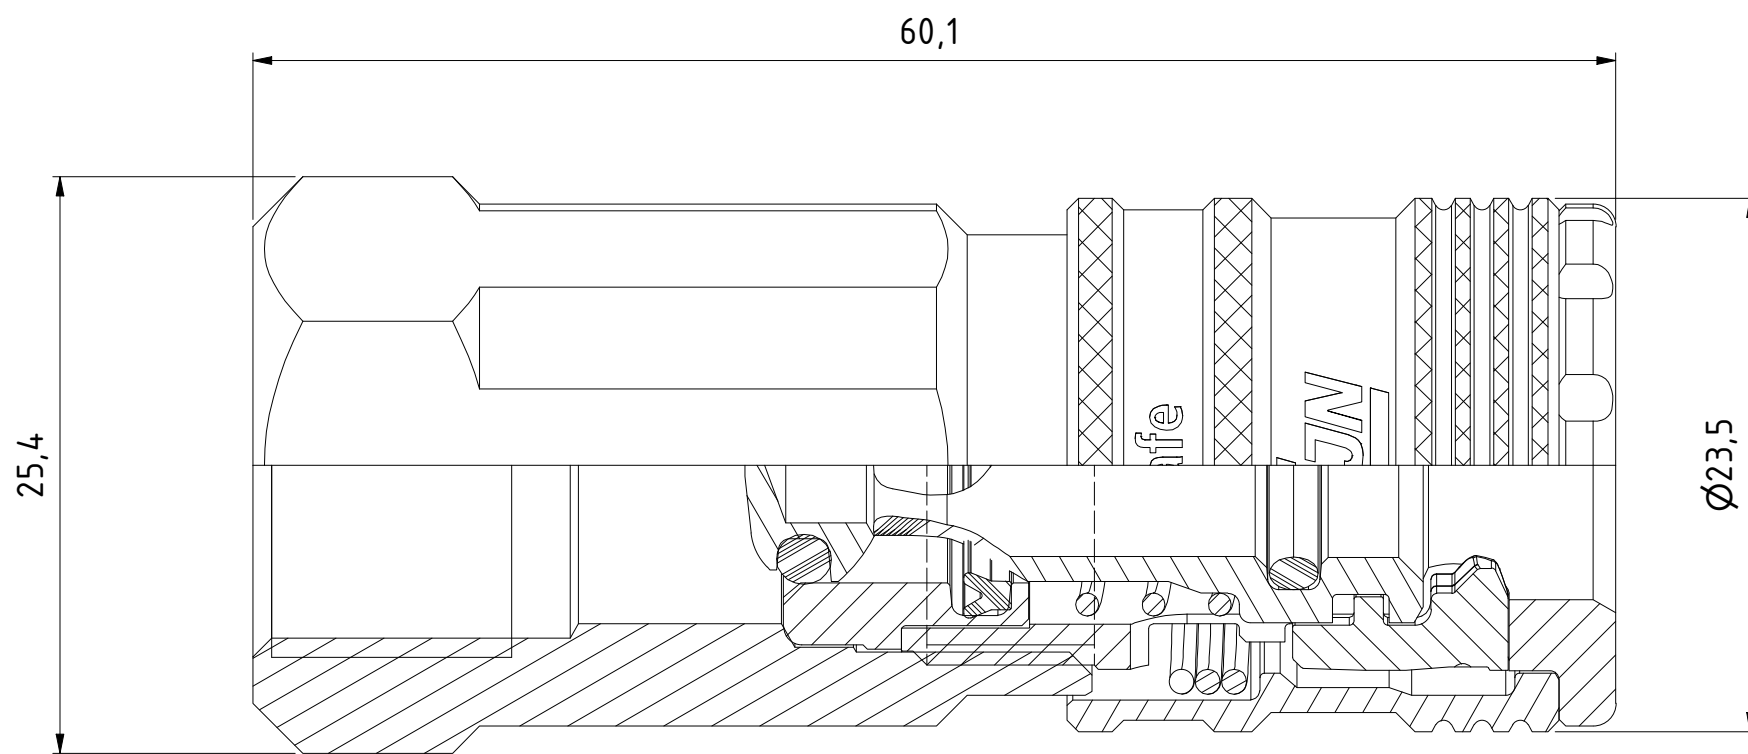

1 : 1


D

C


B

A

Product No. 103102204	
Nominal flow Ø DN:	5,3 mm
Connection Stroke:	19,5 mm
Max WP Connected:	16 bar
Min BP Connected:	140 bar
Temperature range:	-20°C - +100°C
Connection:	G 3/8" Fem
Sealing material:	NBR
Hexagon:	22

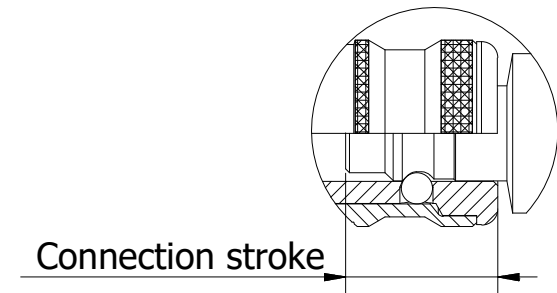

Connection stroke



11	1	Valve	Aluminum Lead Free
10	1	Valve seat	Aluminium Lead Free
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	Lip seal	NBR
6	1	O-ring	NBR
5	1	O-ring	NBR
4	1	Locking sleeve	Hard. steel, Zn 8 Silver
3	2	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel, Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver
Item	Qty	Description	Material

State Production		Drawn CABALAL	Checked LIJA	Approved OSJO	Date 2025-01-20	
	Coupling G 3/8" fem NBR - eSafe			ECO 002136	Former No.	Scale 1 : 1
				Drawing No. 103102204		Issue B